

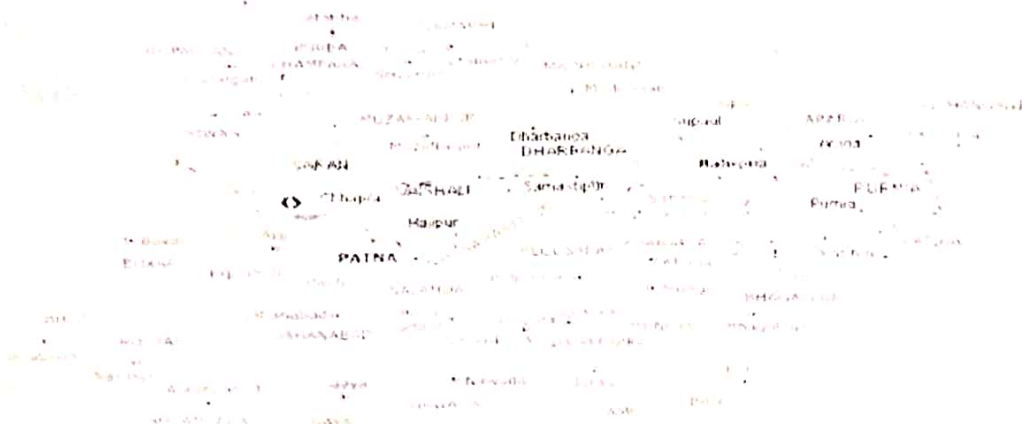


ग्रामीण कार्य विभाग

Rural Works Department, Govt of Bihar

FLOOD DAMAGED REPAIR (F.D.R) 2021-22

BIHAR



Bazar to Nauka Toli

NAME OF THE ROAD :- MOTORABLE WORK OF KOINI TO BHJSAHL ROAD

DISTRICT - GOPALGANJ

BLOCK - MANJHA

TOTAL LENGTH OF ROAD	:	2.400	KM
DAMAGED LENGTH OF ROAD	:	0.105	KM
TOTAL COST OF INITIAL RECTIFICATION FOR MOTORABLE WORK	:	2.352	Lac
CONTIGENCY CHARGE @ 0%	:	0.000	Lac
TOTAL COST OF PROJECT	:	2.352	Lac

SUBMITTED BY:- EXECUTIVE ENGINEER
R.W.D. WORKS DIVISION, GOPALGANJ-2

Inspection Report For Flood Damage Work

Date: 20/12/2021

1. Name of PIUs: R.W.D. Wopalgaonj-2

2. Name of Block/Road: Manjha

A For Road

1. Damage Location/ Chainage : 300 to 400

2. Damage Length : 0.105 Km.

3. Nature of Damage : Flood / Heavy Rain.

4. Details of Restoration Works :

i. Material being used in Restoration Works : Brick Bats.

ii. Equipments / Tools being used in Restoration Works : JCB, Road roller, Tipper

iii. Procedure taken up in Restoration Works : As per SOP.

iv. Restored Length : 0.105 Km.

B For Bridge

1. Damage Location / Chainage :

2. Damage Length :

3. Nature of Damage :

4. Details of Restoration Works :

i. Material being used in Restoration Works :

ii. Equipments / Tools being used in Restoration Works :

iii. Procedure taken up in Restoration Works :


iv. Restored Length :

N.A.


JE
20/12/2021


AE
20-12-21

EE


20/12/21
AE


Signature
(Name of inspector)
26/12/21

GENERAL ABSTRACT OF COST
Flood Damage Repair (FDR)

Block :- Manjha

District:- Gopalganj


Name of Work :- Motorable work of Koini Bazar to Navka Toli Road

Length:- 2.80 Km

SI No.	Description of Item	Amount	Add 12% GST	1% labour Cess	Total
1	Brick Bats	208,135.07	24976.2083	2081.3507	235,192.63
2	Sand Bag	0.00	0.00	0	0.00
	Sub Total Rs. :-	208,135.07	24,976.21	2,081.35	235,192.63
			Say Rs. :-		235,193.00


20/12/2021
Junior Engineer


20-12-21
Asstt. Engineer


Executive Engineer
R.W.D. Works Division, Gopalganj-2

DETAILED ESTIMATE FOR MOTORABLE WORK

Name of Work :- Motorable work of Koini Bazar to Navka Toli Road

Length:- 2.40 Km

SI No.	Description of Item	Chainage		No.	Length (M)	Avg. width (M)	Avg. Depth (M)	Qty	Unit	Unit rate (in Rs.)	Amount
		From	To								
1	Providing brick bats filled in ditches including all cost of material and labour in all respect complete the job as per direction of Engineer in Charge.	300	400	1	105.00	3.75	0.30	118.13	Cum		
								Total Qty	118.13	Cum	1761.99
											208135.07
2	Labour for Filling Sand Bag, Stitching and Placing etc. all complete as per specification and direction of E/I			1	0.00			0.00	No		
				1	0.00			0.00	No		
								Total Qty	0.00	No	17.38
											0.00
										Total	208135.07
										Add 12% GST	24976.21
										Add 1%	2081.35
										Sum Total	235192.63
										Say Rs.	235193.00

Qty Rs 2.352 lac.

Jayash
20/12/21
J.E.
Manjha

20/12/21
A.E.
Manjha

20/12/21
E.E.
Gopalganj-2

F.D.R Technically Sanctioned for Rs 2.352 lac (Refer Two lac Thirty Five Thousand & Two Hundred) only

21/04/22

अधीक्षण अभियंता
प्रमुख कार्य विभाग कार्य अंशक-पिपरा
21/04/22