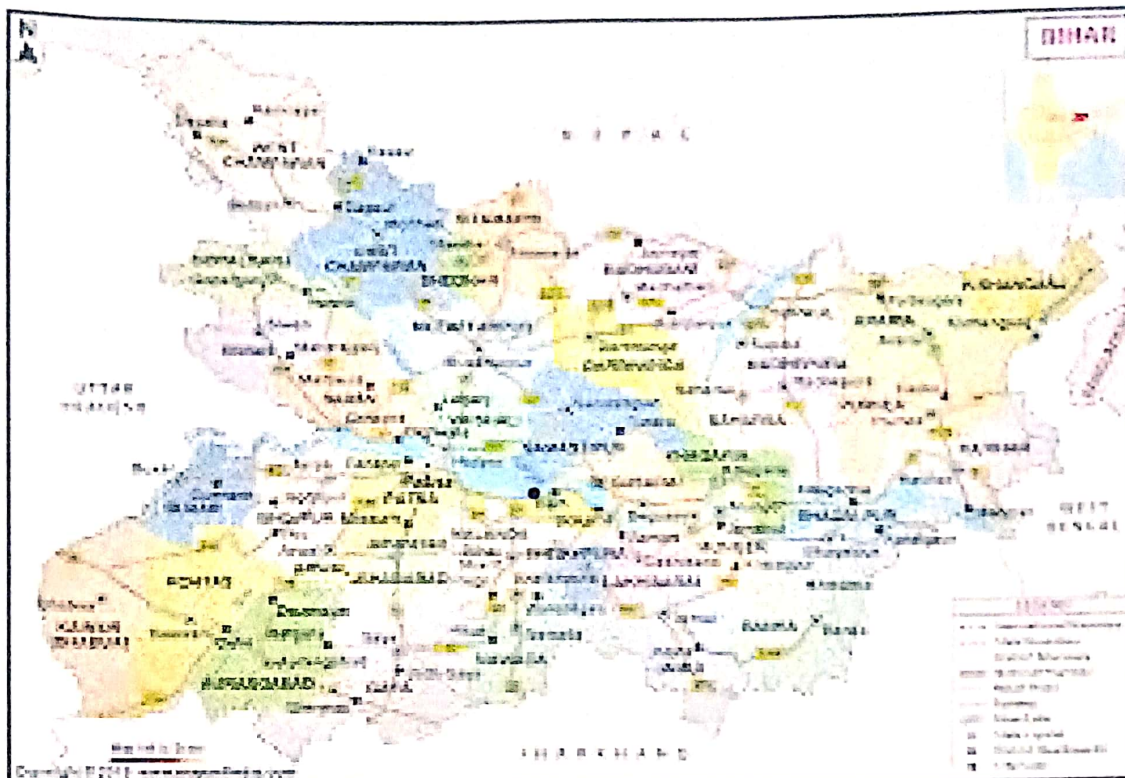




ग्रामीण कार्य विभाग

2021-2022

FLOOD DAMAGED REPORT



MOTORABLE OF PMGSY PATH TO FATEHPUR UTKRAMIT MADAY VIDYALAY

DISTRICT :- GOPALGANJ

DIVISION :- GOPALGANJ -2

BLOCK :- BAIKUNTHPUR

TOTAL LENGTH OF THE ROAD	:	1.500	KM
---------------------------------	---	--------------	-----------

DAMAGED LENGTH OF ROAD	:	0.072	KM
-------------------------------	---	--------------	-----------

PART -A TOTAL COST OF INTIAL RECTIFICATION IN	:	3.41	Lacs
--	---	-------------	-------------

TOTAL SEIGNIORAGE FEE	:	0.005	Lacs
------------------------------	---	--------------	-------------

TOTAL COST OF PROJECT	:	3.413	Lacs
------------------------------	---	--------------	-------------

SUBMITTED By: EXECUTIVE ENGINEER

RWD (W) DIVISION GOPALGANJ-2

Name of work :-

MOTORABLE OF PMGSY PATH TO FATEHPUR UTKRAMIT MADAY
VIDYALAY

Estimate Cost :-

3.413 Lakhs


Total Length :-

1.500 Km

Description :- The Present estimate has been farmed under the supervision of Assistant Engineer in accordance with the order of Executive Engineer , RWD, Gopalganj 2. The part of above mentioned road has been damaged due to heavy rain/flood. And due to this damage the transportation has been obstructed. The immediate motorable work is necessary in public interest. Village will be benefitted by the completion of this motorable work.

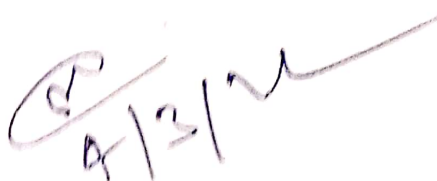
In the estimate has been provision of repairing the damaged part of the road & making it motorable by filling brickbats. In the context of post flood scenario there is still the flow of water which prevalls through the damaged part of the road.

In this estimate the rate of raw materials and labour wages has been prepared after the analysis of new rate. This estimate is as per specification . The estimate is devoted to technical and administrative acceptance.


4/3/22

J.E

A.E


4/3/22

E.E

Inspection Report For Flood Damage Work

Date:

1 Name of PIUs: Executive Engineer, RWD, Wd, Gopalganj-2

2 Name of Block/Road: Baikunthpur / motorable work in PMGSY path to Fatehpur
Utkarmit Madhaya vidyalaya

A For Road

1 Damage Location / Chainage: 700.00M to 900.00M / 12.00M to 14.50M /

2 Damage Length: 12.00 60

3 Nature of Damage: Flood

4 Details of Restoration Works:

i. Material being used in Restoration Works: Brick bats,

ii Equipments / Tools being used in Restoration Works: JCB, Tractor & Trolley

iii Procedure taken up in Restoration Works:

iv Restored Length: 12.00

B For Bridge

1 Damage Location / Chainage:

2 Damage Length:

3 Nature of Damage:

4 Details of Restoration Works:

i. Material being used in Restoration Works:

ii Equipments / Tools being used in Restoration Works:

iii Procedure taken up in Restoration Works:

iv Restored Length:

N/A

[Signature]
4/3/22

J.E

A.E

[Signature]
4/3/22
E.E

[Signature]
20/03/22
Inspecting Officer

FLOOD DAMAGED REPORT

GENERAL ABSTRACT OF COST

NAME OF ROAD :- MOTORABLE OF PMGSY PATH TO FATEHPUR UTKRAMIT
DISTRICT :- MADAY VIDYALAY
BLOCK :- GOPALGANJ
DIVISION :- BAIKUNTHPUR
TOTAL LENGTH OF THE ROAD :- GOPALGANJ -2
DAMAGED LENGTH OF ROAD :- 1.500 KM
0.072 KM

SL.No	Item of Work	AMOUNT
A	INITIAL RECTIFICATION INCLUDING SURFACE RENEWAL	3.41
B	Total Seigniorage Fee	0.005
	TOTAL	3.413

4/3/22

Junior Engineer

ASSTT. Engineer

EE
Asstt. Engineer

*P.D.R Technically Sanctioned For Rs 3.413 lacs (Rupees) Three lacs
Forty one Thousand & Three Hundred only*

22/4/22


Superintending Engineer
R.W.D. WORK Circle, Gangan

22/04/22


GENERAL ABSTRACT OF COST FOR MAINTENANCE OF ROAD

NAME OF ROAD :- MOTORABLE OF PMGSY PATH TO FATEHPUR UTKRAMIT MADAY
DISTRICT :- VIDYALAY
BLOCK :- GOPALGANJ
DIVISION :- BAIKUNTHPUR
TOTAL LENGTH OF THE ROAD :- GOPALGANJ :- 1.500 KM
DAMAGED LENGTH OF ROAD :- 0.072 KM

SL.No	DESCRIPTION	AMOUNT	1 % Labour Cess	12 % GST	1 % Labour Cess & 12 % GST AMOUNT (LAKHS)
	INITIAL RECTIFICATION INCLUDING SURFACE RENEWAL				
1	BRICK BATS	3.02	0.030	0.362	3.41
	SUB TOTAL	3.02	0.030	0.362	3.41
	Total Seigniorage Fee				0.005
	TOTAL COST OF PROJECT IN LAKHS	3.02	0.030	0.362	3.413


4/3/22
Junior Engineer

Asstt. Engineer


Executive Engineer

SL. No	SBD SL.No	MORD Ref No	Description	Unit	Nos	Length	Width	Height	Quantity	Rate	Amount
1	3.2	301	Providing Brick bats including spreading laying hand packing and compacting with C.I Hammer in layers not exceeding 75 mm thick including cost of light barriers, danger signals, chowkidar, taxes, royalty etc all complete job as per specification and direction of E/I including carriage cost of bricks.	Ch	756	Cum	1	6	4.000	1.00	24.00
				Ch	80	Cum	1	6	4.000	0.60	14.40
				Ch	120	Cum	1	10	2.100	0.50	10.50
				Ch	1308	Cum	1	8	3.750	0.40	12.00
				Ch	1450	Cum	1	42	3.750	0.70	110.25
									171.15	1761.99	301565
									TOTAL COST OF PAVEMENT IN RS		301565

4/13/20

J.E

A.E

4/13/20

E.E

RAMIT MADAY VIDYALAY

2 Jul 22

4/31/21