

RURAL WORKS DEPARTMENT

GOVT. OF BIHAR



Name of Work:- Awapur Sherpur to Sahpur.
Block:- Pupri.

F.D.R

Rs. ~~1162611.00~~

775621.00


Year-2021-22

Name of Circle:- R.W.D. Works Circle, Sitamarhi.

Name of Division:- R.W.D. Works Division, Pupri.

बाढ़ क्षतिग्रस्त पथों का अन्तर प्रमंडलीय जाँच प्रतिवेदन हेतु प्रपत्र

1	निरीक्षी पदाधिकारी का नाम एवं पदनाम:-	ई0 विनोद कुमार साह, कार्यपालक अभियंता, ग्रामीण कार्य विभाग, कार्य प्रमंडल, सीतामढ़ी।
2	निरीक्षण की तिथि:-	22-12-2021
3	पथ का नाम (शीर्ष के साथ)	Awapur Sherpur To Sahpur.
4	पथ की लम्बाई	2.65 Km.
5	कार्य प्रमंडल का नाम	ग्रामीण कार्य विभाग, कार्य प्रमंडल, पुपरी।
6	प्रखंड का नाम	पुपरी।
7	पथ की स्थिति	(Completed/Ongoing)
8	पथ अनुरक्षण अवधि में हैं	(Yes/No)
9	क्षतिग्रस्त भाग की लम्बाई	
10	क्षतिग्रस्त भाग में कराये गये कार्य का विवरणी (लम्बाई x ऊँचाई x गहराई)	All Mesurment are attached in estimate Qty of Brick Bats :- 390.6640 m³ Qty of Rubbish:- 97.666 m³ Total Qty :- 488.3300 m³. Entered in MB No:- 2648 Page No:- 2
11	अस्थायी पुर्नस्थापन में किस-किस सामग्रीयों को उपयोग किया गया है। उसकी विवरणी	Brick Bats & Rubbish
12	अभ्युक्ति	सिनेज प्रद.


 निरीक्षी पदाधिकारी का हस्ताक्षर
 पदनाम सहित

DETAILED ESTIMATE FOR F.D.R

General Abstract of Cost

Name of Road:-Awapur Sherpur to Sahpur.

Length of Road:-2.65 Km

Block:-Pupri

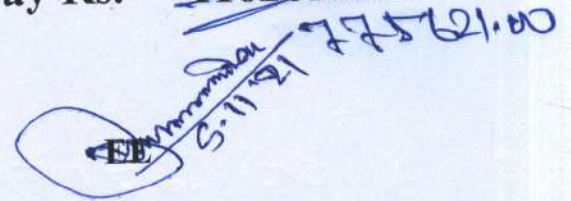
District:-Sitamarhi

S. No.	Particulars	Total Cost (in Lakh)
1	Total Cost for Motorable Roads	987693.00
2	Labour cess @1%	9876.93
3	GST @12%	118523.16
4	Seigniorage Fee @ 10%	46518.32
5	Total Cost of Road Repair	1162611.41

Say Rs. ~~1162611.00~~



JE


AE


S. 11/21 775621.00

अभियंता प्रमुख ग्रामीण कार्य विभाग के पत्रांक-4849 दिनांक-07/12/2021 के आदेशानुसार प्रशासनिक स्वीकृति के प्रत्याशा में औपबंधित तकनीकी स्वीकृति प्रदान की जा रही हैं। प्रशासनिक स्वीकृति प्राप्त होने के उपरान्त पुनः तकनीकी स्वीकृति प्रदान की जायेगी।

औपबंधित तकनीकी स्वीकृति रुपये 775621.00 (Seven Lac Seventy Five thousand Si X. hundred twenty one) only की प्रदान की जाती है।



अधीक्षण अभियन्ता
ग्रामीण कार्य विभाग
कार्य अंचल, सीतामढ़ी

Schedule of Quantity

ne of Road:-Awapur Sherpur to Sahpur.

Sl. No.	Description of Item	Qty	Unit	Rate	Amount
1	Sand Filling in Foundation Trenches as per Drawing & Technical Specification.	0.00	Cum	488.11	0.00
2	Providing and laying of Brick Bat obtained from Chimney with machanical means with all spreading, grading to required slope and compacted at OMC to achieve required density with all complete as per the direction of engineer in charge.	488.3300			0.00
	Less 20% for Voids	97.666			
		390.6640	Cum	2105.01	822351.6266
3	Single bamboo paiasiding/ walling of whole 2nd class bamboo (Jati or Bethua) 75mm dia and closely packed & driven including fitting fixing with half bamboo kamis horizontally in three rows with cane or tying with wire complete and Struts 1.5m apart longitudinally and providing brush wood as per drawing and technical specification clause 1302.5	0.00	m	140.4	0.00
4	Providing, Laying and placing empty cement bag filled with local sand including stiching with sutall etc. do.....do.....all complete job as per specification and direction of E/I. (including Royalty and all Taxes)	0.00	no.	9.63	0.00
5	Providing and Laying Reinforced Cement Concrete Pipe NP3 (dia 1000) as per design in Single Row with old available pipe	3.00	m	3400.00 3300	10200.00 9900
6	Providing and Laying Reinforced Cement Concrete Pipe NP3 (dia 600) as per design in Single Row with old available pipe	4.00	m	850.00 835	3400.00 3340.00
7	Providing Quarry Material Rabbish for filling the voids in bricks batsdo.....all complete job as per specification and direction of E/I.			873.00	85263.00
	Taking 20% of Brick Qty for Rabbish	97.666	Cum	1553.68	151741.7109

Total ~~987693.34~~
Say ~~987693.00~~

775621.00

[Signature]
JE

[Signature]
AE

[Signature]
5/11/21

Details of Measurement of ditches filled by brick bats and rabbish

ne of Road:-Awapur Sherpur to Sahpur.

	Nos.	L	W		H		VOLUME
CH 50 M	1	10.00	3.500		0.230	Av	8.0500
	1	30.00	3.000		0.230	Av	20.7000
CH 400 M	1	6.00	3.000		0.300	Av	5.4000
	1	41.00	3.700	Av	1.050	Av	159.2850
CH 520 M	1	11.00	4.500	Av	0.600		29.7000
CH 1000 M (Less 10% in H)	1	12.00	4.500		2.040	Av	110.1600
CH 1800 M (Less 10% in H)	1	18.00	4.6500	Av	1.790	Av	149.8230
	1	6.00	2.6000		0.270	Av	4.2120
CH 2000 M	1	2.50	1.0000		0.400	Av	1.0000
		Total (in Cum)					488.3300
Laying Hume Pipe of 1000 mm dia	1	3			0		3.00
Laying Hume Pipe of 600 mm dia	2	2			0		4.00
Cement Bage							


JE


AE

