

RURAL WORKS DEPARTMENT

GOVT. OF BIHAR



Name of Work:- Kushial to Gangwara.
Block:- Pupri.

F.D.R

Rs. ~~69027.00~~ 45855 =


Year-2021-2

Name of Circle:- R.W.D. Works Circle, Sitamarhi.

Name of Division:- R.W.D. Works Division, Pupri.

बाढ़ क्षतिग्रस्त पथों का अन्तर प्रमंडलीय जाँच प्रतिवेदन हेतु प्रपत्र

1	निरीक्षी पदाधिकारी का नाम एवं पदनाम:-	ई0 विनोद कुमार साह, कार्यपालक अभियंता, ग्रामीण कार्य विभाग, कार्य प्रमंडल, सीतामढ़ी।
2	निरीक्षण की तिथि:-	22-12-2021
3	पथ का नाम (शीर्ष के साथ)	Kusoi to Gangwara
4	पथ की लम्बाई	5.00 K.M.
5	कार्य प्रमंडल का नाम	ग्रामीण कार्य विभाग, कार्य प्रमंडल, पुपरी।
6	प्रखंड का नाम	पुपरी।
7	पथ की स्थिति	(Completed/Ongoing)
8	पथ अनुरक्षण अवधि में हैं	(Yes/No)
9	क्षतिग्रस्त भाग की लम्बाई	
10	क्षतिग्रस्त भाग में कराये गये कार्य का विवरणी (लम्बाई x ऊँचाई x गहराई)	All Mesurment are attached in estimate Qty of Brick Bats :- 23.50 m³. Qty of Rubbish:- 5.87 m³. Total Qty :- 29.38 m³ Entered in MB No:- 2643. Page No:- 2
11	अस्थायी पुर्नस्थापन में किस-किस सामग्रीयों को उपयोग किया गया है। उसकी विवरणी	Brick Bats & Rubbish
12	अभ्युक्ति	सौमित्र प्रद.


 निरीक्षी पदाधिकारी का हस्ताक्षर
 पदनाम सहित

DETAILED ESTIMATE FOR F.D.R

General Abstract of Cost

Name of Road:-Kushial to Gangwara.

Length of Road:-5.00 Km

Block:-Pupri


District:-Sitamarhi


S. No.	Particulars	Total Cost (in Lakh)
1	Total Cost for Motorable Roads	58609.00
2	Labour cess @1%	586.09
3	GST @12%	7033.08
4	Seigniorage Fee @ 10%	2798.90
5	Total Cost of Road Repair	69027.07

Say Rs. ~~69027.00~~

45855.00



JE


AE


EEA

अभियंता प्रमुख ग्रामीण कार्य विभाग के पत्रांक-4849 दिनांक-07/12/2021 के आदेशानुसार प्रशासनिक स्वीकृति के प्रत्याशा में औपबंधित तकनीकी स्वीकृति प्रदान की जा रही हैं। प्रशासनिक स्वीकृति प्राप्त होने के उपरान्त पुनः तकनीकी स्वीकृति प्रदान की जायेगी।

औपबंधित तकनीकी स्वीकृति रुपये 45855.00 (Forty Five thousand Eight hundred Fifty five only) की प्रदान की जाती हैं।



ग्रामीण कार्य विभाग
कार्य अंचल, सीतामढ़ी


Schedule of Quantity


me of Road:-Kushial to Gangwara.

Sl. No.	Description of Item	Qty	Unit	Rate	Amount
1	Sand Filling in Foundation Trenches as per Drawing & Technical Specification.	0.00	Cum	488.11	0.00
2	Providing and laying of Brick Bat obtained from Chimney with machanical means with all spreading, grading to required slope and compacted at OMC to achieve required density with all complete as per the direction of engineer in charge.	29.3817			0.00
	Less 20% for Voids	5.87634			
		23.5054	Cum	2105.01	49479.01785
3	Single bamboo paiasiding/ walling of whole 2nd class bamboo (Jati or Bethua) 75mm dia and closely packed & driven including fitting fixing with half bamboo kamis horizontally in three rows with cane or tying with wire complete and Struts 1.5m apart longitudinally and providing brush wood as per drawing and technical specification clause 1302.5	0.00	m	140.4	0.00
4	Providing, Laying and placing empty cement bag filled with local sand including stitching with sutall etc. do.....do.....all complete job as per specification and direction of E/I. (including Royalty and all Taxes)	0.00	no.	9.63	0.00
5	Providing and Laying Reinforced Cement Concrete Pipe NP3 (dia 1000) as per design in Single Row with old available pipe	0.00	m	3400.00	0.00
6	Providing and Laying Reinforced Cement Concrete Pipe NP3 (dia 600) as per design in Single Row with old available pipe	0.00	m	850.00	0.00
7	Providing Quarry Material Rabbish for filling the voids in bricks batsdo.....all complete job as per specification and diretion of E/I.				
	Taking 20% of Brick Qty for Rabbish	5.87634	Cum	1553.68	9129.951934

Total 58608.97
Say 58609.00
45855=


JE


AE



G-11-27

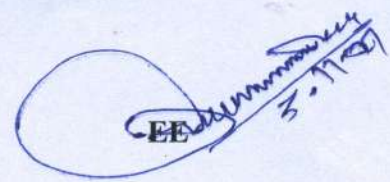
Details of Measurement of ditches filled by brick bats and rabbish

Name of Road:-Kushial to Gangwara.

	Nos.	L	W		H		VOLUME
CH 25 M	1	18.30	1.250	Av	0.400	Av	9.1500
	1	3.00	3.250		0.450	Av	4.3875
CH 800 M	1	3.20	1.000		0.230		0.7360
	2	2.60	1.200		0.230		1.4352
	1	2.40	1.500		0.230		0.8280
	1	3.20	2.000		0.170	Av	1.0880
	1	4.00	2.500		0.100		1.0000
	1	2.25	1.500		0.220		0.7425
	1	2.50	1.250		0.220		0.6875
	1	2.00	1.600		0.220		0.7040
	1	2.90	1.500		0.170	Av	0.7395
	1	3.00	1.000		0.170	Av	0.5100
	1	6.00	3.200		0.250	Av	4.8000
	1	3.00	0.900		0.170	Av	0.4590
	2	1.75	1.700		0.250	Av	1.4875
	1	1.50	1.900		0.220		0.6270
		Total (in Cum)					29.3817
Laying Hume Pipe of 1000 mm dia		0	0		0		0.00
Laying Hume Pipe of 600 mm dia		0	0		0		0.00
Cement Bage							


JE


AE


EE