



# ग्रामीण कार्य विभाग

Rural Works Department, Govt of Bihar

YEAR-2020-21

## DETAILED PROJECT REPORT FOR MOTORABLE WORK

# बिहार



|                       |                           |              |                                |
|-----------------------|---------------------------|--------------|--------------------------------|
| DISTRICT :-           | DARBHANGA                 | BLOCK :-     | Hanumannagar                   |
| ROAD NAME :           | T02 TO MUSHIMA KHUJOSARAI |              |                                |
| HEAD                  | FDR                       | YEAR-2020-21 |                                |
| TOTAL LENGTH OF ROAD  |                           | :            | 0.550 KM                       |
| EFFECTIVE LENGTH      |                           | :            | 68.000 M                       |
| TOTAL COST OF PROJECT |                           | :            | <del>5.141</del><br>5.083 LAKH |

Executive Engineer  
RWD Darbhanga-1

## Inspection Report of Flood Damage work

Name of PIUs:- RWD Works Division, Darbhanga Inspected by Beni pur

Name of Block/Road:- To 2 to Mushima Khujosarai

### A. For Road

1. Damage Location Chainage:- 300 M to 400 M

2. Damage Length :- 68 M

3. Nature of Damage :- Road Crust damaged

#### 4. Details of Restoration Works

i. Material being used in Restoration works:- Brice heat-

ii. Equipment's /Tools being used in Restoration works:- J.C.B / tractor / Labour

iii. Procedure taken up in Restoration works:- Laying of Brice heat - with light Rammings

iv. Restored Length:-

### B. For Bridge

1. Damage Location Chainage:- 300 M to 400 M

2. Damage Length :- 68 M

3. Nature of Damage :- Road Crust damaged

#### 4. Details of Restoration Works

i. Material being used in Restoration works:-

ii. Equipment's /Tools being used in Restoration works:-

iii. Procedure taken up in Restoration works:-

iv. Restored Length:-

} 17/11

were found satisfactory

Signature of JE/AE/EE

Signature

(Name of Inspection)

E.E Benipur

### GENERAL ABTRACT OF COST

NAME OF ROAD : T02 TO MUSHIMA KHUJOSARAI

DISTRICT Dharbhanga  
BLOCK Hanumannagar

LENGTH OF ROAD (in Km) 0.550

EFFECTIVE LENGTH (M) 68

| Sl. No. | DESCRIPTION         | AMOUNT     |
|---------|---------------------|------------|
| 1       | Cost of Restoration | 431754.984 |
| 2       | GST @12%            | 51810.598  |
| 3       | Labour cess @1%     | 4317.550   |
| 4       | Seigniorage fee     | 26192.160  |
| 5       | Grand Total         | 514075.292 |
| 6       | Say(lacs)           | 5.141      |

426943


51233=0


4269=0


25983=0

508348=

Say 508348=0

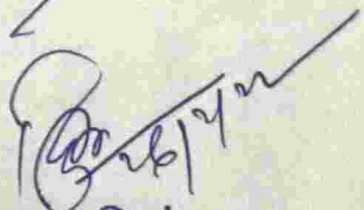
  
JE  
RWD

  
AE  
RWD

  
EE  
RWD

कार्यपालक अभियंता वनीडा के लॉन्ग प्रसिद्धि के आधारे पर

Technically sanctioned for Rs 508348=0  
(Rs Five lacs Eight thousand three hundred forty Eight only).

  
अधिक्षण अभियंता  
कार्य अंचल, दरभंगा  
Abhinav  
26/02/22

# DETAILED ESTIMATE FOR PAVEMENT

FORMAT F6

## Detail Estimate For Motorable work of Road

| Name of road                                                                                                                                                 | Block        |      |        | District   |           | Division                  |               | Length(KM)         |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|------|--------|------------|-----------|---------------------------|---------------|--------------------|
| T02 TO MUSHIMA KHUJOSARAI                                                                                                                                    | Hanumannagar |      |        | Dharbhanga |           | Darbhanga-I               |               | 0.55               |
| Description                                                                                                                                                  | Unit         | Nos  | LENGTH | Avg. width | Avg Hight | Qty                       | RATE          | AMOUNT<br>(in Rs.) |
| Labour and Placing Brick bats with<br>Light raming                                                                                                           | cum          | 1    | 25     | 2          | 2.15      | 107.50                    | 2004.96       | 215533.20          |
|                                                                                                                                                              |              | 1    | 5      | 3          | 1.9       | 28.50                     | 2004.96       | 57141.36           |
|                                                                                                                                                              |              | 1    | 8      | 2          | 2.15      | 34.40                     | 2004.96       | 69158.72           |
| Supply of new EC bags with Labour for<br>Laying new EC bag with local<br>sand, stitching, stacking the bags and<br>Laying with lead of 150m etc as direction | cum          | 1.00 | 30.00  | 1.20       | 2.300     | 83<br>(83cum=<br>2442Nos) | 36.90(in Nos) | 90109.80           |
| Total                                                                                                                                                        |              |      |        |            |           |                           |               | 4,31,754.98        |

426942.23

*[Signature]*  
JE  
RWD

*[Signature]*  
AE  
RWD

*[Signature]*  
EE  
RWD

Checked by *[Signature]*

*[Signature]*  
9.12.2024

*[Signature]*

*[Signature]*  
09/12/2024

*[Signature]*

*[Signature]*

*[Signature]*

*[Signature]*