

RURAL WORKS DEPARTMENT



GOVERNMENT OF BIHAR

CIRCLE – R.W.D. works Circle, Kishanganj

DIVISION – R.W.D. works Division , Kishanganj-1

Name of Work :- Karhebari Piakuri To T01

Block :- KOCHADHAMAN

Total Length:- 0.600 KM

Damage Length:- 0.206 KM

Estimated cost :- Rs 486657.00

Year : 2021-22

ग्रामीण कार्य विभाग
बिहार, सरकार

पत्रांक - मु0अ0-4 (मु0) विविध कार्य-23-60/2020 - 1937

पटना, दिनांक 07/07/2021

प्रेषक,

पंकज कुमार पाल (भा0प्र0से0)
सचिव

सेवा में,

सभी कार्यपालक अभियंता
ग्रामीण कार्य विभाग,

विषय- बाढ़ अतिवृष्टि से क्षतिग्रस्त पथों/पुलियों को यातायात लायक (Motorable) करने के संबंध में।

महाशय,

उपर्युक्त विषय के संबंध में निर्देश दिया जाता है कि प्रमंडल अन्तर्गत सभी अभियंता बाढ़/अतिवृष्टि से क्षतिग्रस्त पथों का शत प्रतिशत निरीक्षण करेंगे। पथों/पुलियों के क्षतिग्रस्त भाग से पानी उतरते ही उसे यातायात लायक बनाने की कारवाई एवं Motorable किये जाने से पहले तथा Motorable कार्य के बाद का Real time, Geo tagged photographs को MIS पर तत्क्षण अपलोड किया जाना सुनिश्चित करेंगे। इन कार्यों को कराने हेतु कार्यपालक अभियंता पूर्ण रूप से जिम्मेवार होंगे। कार्य न कराने की स्थिति में उनके विरुद्ध अनुशासनिक कार्रवाई की बाध्यता होगी।

विश्वासभाजन

(पंकज कुमार पाल)

सचिव

ज्ञापांक- मु0अ0-4 (मु0) विविध कार्य-23-60/2020 - 1937

पटना, दिनांक 07/7/2021

प्रतिलिपि:-सभी अधीक्षण अभियंता को सूचनार्थ एवं आवश्यक कार्रवाई हेतु प्रेषित। साथ ही उन्हें निर्देश दिया जाता है कि वे लगातार अनुश्रवण एवं निरीक्षण करते हुए क्षतिग्रस्त भाग को अतिशीघ्र यातायात लायक बनवाने की कार्रवाई सुनिश्चित करेंगे।

सचिव

ज्ञापांक-मु0अ0-4 (मु0) विविध कार्य-23-60/2020 - 1937

पटना, दिनांक 07/7/2021

प्रतिलिपि:-सभी मुख्य अभियंता, ग्रामीण कार्य विभाग को सूचनार्थ एवं लगातार अनुश्रवण करने हेतु प्रेषित।

सचिव

Inspection Report for Flood Damage Work

1. Name of PIUs

: Kishanganj-1

2. Name Of Block / Road

: Karchebari piakuri to T02

A. For Road

1. Damage Location / Chainage

:

2. Damage Length

: 206 m

3. Nature Of Damage

: Damage and deep side cutting

4. Details Of Restoration

:

i) Material Being Used In Restoration

: sand, cement bag, Bamboo, brick bats

ii) Equipment / Tools Being Used In Restoration Works

: Tractor

iii) Procedure Taken Up In Restoration Works

: manually

iv) Restored Length

: 206 m

B. For Bridge

1. Damage Location / Chainage

:

2. Damage Length

:

3. Nature Of Damage

:

4. Details Of Restoration

:

i) Material Being Used In Restoration

:

NA

ii) Equipment / Tools Being Used in Restoration Works

:


iii) Procedure Taken Up In Restoration Works

:


iv) Restored Length


:


Satisfactory


04-12-21
AE

Signature of JE / AE / EE



04/12/21
AE



04/12/21



04/04/22
Signature
कार्यपालक अभियन्ता
ग्रामीण कार्य विभाग
(Name Of Inspector)
कार्य प्रमंडल, अररिया

ABSTRACT OF COST

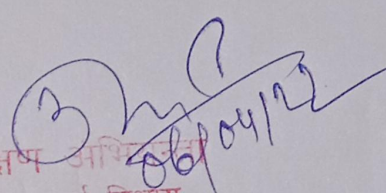
Name of Work :-		Karhebari Piakuri To T01
Block :-		KOCHADHAMAN
Sl. No.	Particulars	Amount (In Rs.)
A	Cost of Restoration work :-	Rs 424713.00
B	Add 12 % GST	Rs 50966.00
C	Add 1 % L. Cess	Rs 4247.00
D	Add S.Fee @ 10 % of Material Cost	Rs 6731.00
Total Cost with GST, LC & S.Fee		Rs 486657.00


J.E
RWD
KOCHADHAMAN


A.E
R.W.D
KOCHADHAMAN


E.E
R.W.D
Kishanganj - A

Technically sanctioned for Rs 486657/- (Four Lacs Eighty Six Thousand Six Hundred and Fifty Seven/-)



P. S. P.
06/04/22
E.O


अधीक्षक अभियन्ता
ग्रामीण कार्य विभाग
कार्य अंचल, किशनगंज


Detailed Estimate

Name of Work :- Karhebari Piakuri To T01

Sl. No.	SDB Sl. No.	MORD Ref.No	Description	No.	No.	Length (M)	Width (M)	Height (M)	Qty.	Unit	Rate (Rs.)	Amount (Rs.)	
1	WRD	5.7.7	Providing bamboo piles including labour for cutting of 62 mm to 75 mm dia bamboo piles to size and making shoes and driving etc complete job as per specification and direction of E/I	1	865	2.00	-	-	1730.00				
									Total:-	1730.00	Mtr.	55.40	95842.00
2	WRD	5.7.9	Supplying, fitting and fixing 62 mm to 75 mm dia bamboo runners in position at every vertical pile with 150 mm long nails or 38 swg G.I. wire including cost of G.I. wire or nails, all material and labour complete job as per specification and direction of E/I.	2	1	173.00	-	-	346.00				
									Total:-	346.00	Mtr.	30.87	10681.00
3	WRD	5.7.40	Brick bats										
			Providing laying and spreading brick bats in Road ditches all complete as per approved design, specifications and direction of E/I	1	1	58.00	0.40	0.25	5.80				
				1	1	52.00	(0.9+0.6)/2	0.25	9.75				
				1	1	33.00	(0.9+0.6)/2	0.25	6.19				
				1	1	30.00	(0.9+0.6)/2	0.25	5.63				
									Total:-	27.37	Cum	2168.72	59358.00
4		5.7.53	Providing and filling empty cement bags										
			Supply of new bag with labour for filling new EC bag with local sand (volume of filled bag 1.2 cft and weight 50kg), stitching on two line by approved nylon thread with stitching machine & generator, stacking the bags and placing with a lead of 150m including supply of nylon threads etc all complete as per approved design, specification and direction of E/I.	1	1	58.00	0.50	0.40	11.60				
				1	1	52.00	(1.5+1.2)/2	(1.2+1.0)/2	77.22				
				1	1	33.00	(1.5+1.2)/2	(1.2+1.0)/2	49.01				
				1	1	33.00	(1.5+1.2)/2	(1.2+1.0)/2	49.01				
				1	1	30.00	(1.5+1.2)/2	(1.2+1.0)/2	44.55				
									Total:-	231.39	Cum		
									@ 0.034 Cum each bag	6806	No.	38.03	258832.00
												TOTAL	424713.00



J.E.
RWD
KOCHADHAMAN


A.E.
R.W.D
KOCHADHAMAN


E.E.
R.W.D
Kishanganj

ABSTRACT OF QUANTITY & COST


Sl No	Item of Works	Quantity	Unit	Earth Work	Stone Materials			Brick Bats	Local Sand	Total
					26.5mm to 9.50mm	9.50mm to 4.75mm	4.75mm below			
1	Earth Work:-	0.00	Cum	0.000	-	-	-	-	-	
2	GSB (Gr.-II):-	0.00	Cum	-	0.000	0.000	0.000	-	-	
3	Brick Bats:-	27.37	Cum	-	-	-	-	32.844	-	
4	Local Sand Filling:-	0.00	Cum	-	-	-	-	-	0.000	
5	Providing & Filling Empty Cement Bags:-	6806.00	No.	-	-	-	-	-	231.404	
6	Providing & Filling Empty Cement Bags in Nylon Crate:-	0.00	No.	-	-	-	-	-	0.000	
		Total Quantity:-		0.000	0.000	0.000	0.000	32.844	231.404	
		Rate:-		Rs 34.78	Rs 285.35	Rs 285.35	Rs 285.35	Rs 1050.00	Rs 141.85	
		Total Amount:-		0.00	0.00	0.00	0.00	34486.00	32825.00	Rs 67311.00
								S.Fee@10% of M.Cost:-		Rs 6731.00


12-11-24

JE/RWD
KOCHADHAMAN


12/11/24

AE/RWD
KOCHADHAMAN


EE/RWD
Kishanganj-1