

RURAL WORKS DEPARTMENT GOVT. OF BIHAR



Name of Work:- Awapur Chak urf Sherpur Link Road Primary School
Chakasa High School.

Block:- Pupri.

F.D.R

Rs. ~~765735.00~~ 505483.00


Year-2021-22

Name of Circle:- R.W.D, Works Circle, Sitamarhi.

Name of Division:- R.W.D. Works Division, Pupri.

बाढ़ क्षतिग्रस्त पथों का अन्तर प्रमंडलीय जाँच प्रतिवेदन हेतु प्रपत्र

1	निरीक्षी पदाधिकारी का नाम एवं पदनाम:-	ई0 विनोद कुमार साह, कार्यपालक अभियंता, ग्रामीण कार्य विभाग, कार्य प्रमंडल, सीतामढ़ी।
2	निरीक्षण की तिथि:-	22-12-2021
3	पथ का नाम (शीर्ष के साथ)	Awapur Chak up Sherpur Link Road Primary school Chakasa High School.
4	पथ की लम्बाई	2.65 Km.
5	कार्य प्रमंडल का नाम	ग्रामीण कार्य विभाग, कार्य प्रमंडल, पुपरी।
6	प्रखंड का नाम	पुपरी।
7	पथ की स्थिति	(Completed/Ongoing)
8	पथ अनुरक्षण अवधि में हैं	(Yes/No)
9	क्षतिग्रस्त भाग की लम्बाई	
10	क्षतिग्रस्त भाग में कराये गये कार्य का विवरणी (लम्बाई x ऊँचाई x गहराई)	All Mesurment are attached in estimate Qty of Brick Bats :- 259.0224m³ Qty of Rubbish:- 64.7556m³ Total Qty :- 323.7780 m³ Entered in MB No:- 2662 Page No:- 2
11	अस्थायी पुर्नस्थापन में किस-किस सामग्रीयों को उपयोग किया गया है। उसकी विवरणी	Brick Bats & Rubbish
12	अभ्युक्ति	संतोष पुद


 निरीक्षी पदाधिकारी का हस्ताक्षर
 पदनाम सहित

DETAILED ESTIMATE FOR F.D.R

General Abstract of Cost

Name of Road:-Awapur Chak urf Sherpur Link Road Primary School
Chakasa High School.


Length of Road:-2.65 Km


Block:-Pupri

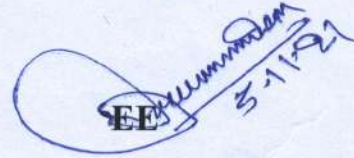
District:-Sitamarhi

S. No.	Particulars	Total Cost (in Lakh)
1	Total Cost for Motorable Roads	650347.00
2	Labour cess @1%	6503.47
3	GST @12%	78041.64
4	Seigniorage Fee @ 10%	30843.09
5	Total Cost of Road Repair	765735.20

Say Rs. ~~765735.00~~
505483.00


JE


AE


EE

अभियंता प्रमुख ग्रामीण कार्य विभाग के पत्रांक-4849 दिनांक-07/12/2021


के आदेशानुसार प्रशासनिक स्वीकृति के प्रत्याशा में औपबंधित तकनीकी

स्वीकृति प्रदान की जा रही है। प्रशासनिक स्वीकृति प्राप्त होने के उपरान्त

पुनः तकनीकी स्वीकृति प्रदान की जायेगी।

औपबंधित तकनीकी स्वीकृति रुपये 505483.00 (Five Lac Five Thousand Four hundred

Eighty Three only की प्रदान की जाती है।


22/4/22

अधीक्षण अभियन्ता
ग्रामीण कार्य विभाग
कार्य अंचल, सीतामढ़ी

Schedule of Quantity


Name of Road:-Awapur Chak urf Sherpur Link Road Primary School Chakasa High School.

Sl. No.	Description of Item	Qty	Unit	Rate	Amount
1	Sand Filling in Foundation Trenches as per Drawing & Technical Specification.	0.00	Cum	488.11	0.00
2	Providing and laying of Brick Bat obtained from Chimney with machanical means with all spreading, grading to required slope and compacted at OMC to achieve required density with all complete as per the direction of engineer in charge.	323.7780			0.00
	Less 20% for Voids	64.7556			
		259.0224	Cum	2105.01	545244.742
3	Single bamboo paiasiding/ walling of whole 2nd class bamboo (Jati or Bethua) 75mm dia and closely packed & driven including fitting fixing with half bamboo kamis horizontally in three rows with cane or tying with wire complete and Struts 1.5m apart longitudinally and providing brush wood as per drawing and technical specification clause 1302.5	32.00	m	140.4	4492.80
4	Providing, Laying and placing empty cement bag filled with local sand including stiching with sutall etc. do.....do.....all complete job as per specification and direction of E/I. (including Royalty and all Taxes)	0.00	no.	9.63	0.00
5	Providing and Laying Reinforced Cement Concrete Pipe NP3 (dia 1000) as per design in Single Row with old available pipe	0.00	m	3400.00	0.00
6	Providing and Laying Reinforced Cement Concrete Pipe NP3 (dia 600) as per design in Single Row with old available pipe	0.00	m	850.00	0.00
7	Providing Quarry Material Rabbish for filling the voids in bricks batsdo.....all complete job as per specification and diredtion of E/I.				
	Taking 20% of Brick Qty for Rabbish	64.7556	Cum	1553.68	100609.481

Total ~~650347.02~~

Say ~~650347.00~~

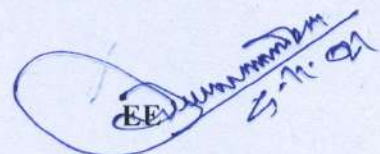
505483.00


5/11/21

JE


5.11.21

AE


5.11.21

Details of Measurement of ditches filled by brick bats and rabbish

Name of Road:-Awapur Chak urf Sherpur Link Road Primary School Chakasa High School.

	Nos.	L	W		H		VOLUME
CH 1400 M	1	15.00	3.200		0.170	Av	8.1600
	1	14.00	3.000		0.230		9.6600
	1	30.00	3.100	Av	1.700		158.1000
	1	20.00	3.200	Av	1.700		108.8000
	1	12.00	3.250	Av	1.500		58.5000
	1	34.00	4.100	Av	0.170	Av	23.6980
	1	45.00	3.900	Av	0.220	Av	38.6100
	1	4.50	4.000	Av	1.000	Av	18.0000
					Total		423.5280
Less for Old Work	1	30.00	1.750	Av	1.100		57.7500
Less for Old Work	1	20.00	1.750	Av	1.200		42.0000
					Total		99.7500
		Total (in Cum)					323.7780
Laying Hume Pipe of 1000 mm dia		0	0		0		0.00
Laying Hume Pipe of 600 mm dia		0	0		0		0.00
Cement Bage							


JE


AE


EE