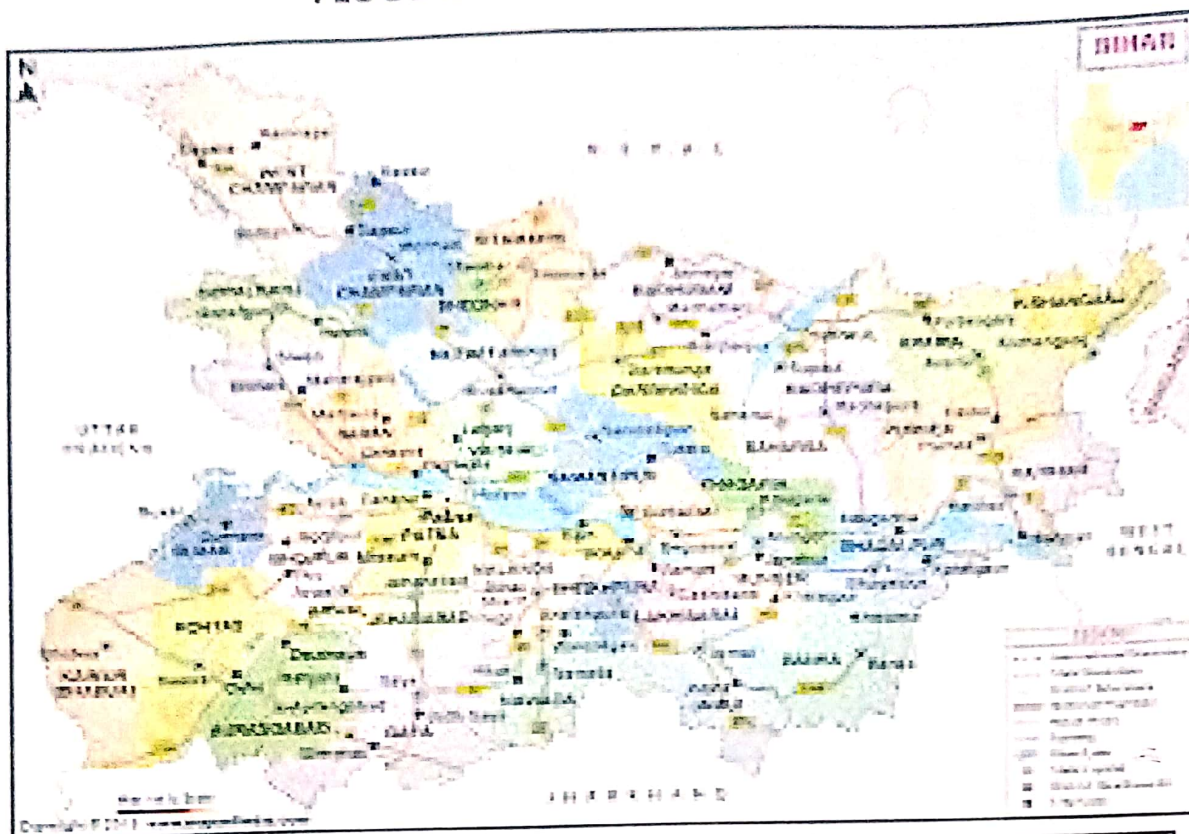


FLOOD DAMAGED REPORT



MOTORABLE OF HAMIDPUR TO KRITPURA

DISTRICT :- GOPALGANJ

DIVISION :- GOPALGANJ -2

BLOCK :- BAIKUNTHPUR

TOTAL LENGTH OF THE ROAD	:	3.097	KM
--------------------------	---	-------	----

DAMAGED LENGTH OF ROAD	:	0.338	KM
------------------------	---	-------	----

PART -A TOTAL COST OF INTIAL RECTIFICATION IN	:	14.69	Lacs
---	---	-------	------

TOTAL SEIGNIORAGE FEE	:	0.609	Lacs
-----------------------	---	-------	------

TOTAL COST OF PROJECT	:	15.300	Lacs
-----------------------	---	--------	------

SUBMITTED By: EXECUTIVE ENGINEER
RWD (W) DIVISION GOPALGANJ-2

Name of work :-

MOTORABLE OF HAMIDPUR TO KRITPURA

Estimate Cost -

15.30 Lakhs

Total Length :-

3.097 Km

Description :- The Present estimate has been farmed under the supervision of Assistant Engineer in accordance with the order of Executive Engineer , RWD, Gopalganj 2. The part of above mentioned road has been damaged due to heavy rain/flood. And due to this damage the transportation has been obstructed. The immediate motorable work is necessary in public interest. Village will be benefitted by the completion of this motorable work.


In the estimate has been provision of repairing the damaged part of the road & making it motorable by filling brickbats. In the context of post flood scenario there is still the flow of water which prevails through the damaged part of the road.

In this estimate the rate of raw materials and labour wages has been prepared after the analysis of new rate. This estimate is as per specification . The estimate is devoted to technical and administrative acceptance.



J.E

A.E


E.E

Inspection Report For Flood Damage Work

Date:

1 Name of PIUs: Executive Engineer, RWD, WD, Gopalgarh-2

2 Name of Block/Road: Baikunthpur / Motorable work do Hamidpur to Kritpur

A For Road

1 Damage Location / Chainage: 0 m to 1000 M / 1200 M to 1650 M

2 Damage Length: 73.0 M / ~~265.00~~ 265.00

3 Nature of Damage: Flood

4 Details of Restoration Works:

i. Material being used in Restoration Works:

Brick bats, Earth

ii Equipments / Tools being used in Restoration Works:

JCB, Tractor Trolley

iii Procedure taken up in Restoration Works:

iv Restored Length: 338.0 M

B For Bridge

1 Damage Location / Chainage:

2 Damage Length:

3 Nature of Damage:

N/A

4 Details of Restoration Works:

i. Material being used in Restoration Works:

ii Equipments / Tools being used in Restoration Works:

iii Procedure taken up in Restoration Works:

iv Restored Length:

[Signature]
5/3/22
JE

AE

[Signature]
5/3/22
EE

[Signature]
26/3/22
Inspecting
Officer

FLOOD DAMAGED REPORT

GENERAL ABSTRACT OF COST

NAME OF ROAD :- MOTORABLE OF HAMIDPUR TO KRITPURA
DISTRICT :- GOPALGANJ
BLOCK :- BAIKUNTHPUR
DIVISION :- GOPALGANJ -2
TOTAL LENGTH OF THE ROAD :- 3.097 KM
DAMAGED LENGTH OF ROAD :- 0.338 KM

SL.No	Item of Work	AMOUNT
A	INITIAL RECTIFICATION INCLUDING SURFACE RENEWAL	14.69
B	Total Seigniorage Fee	0.609
	TOTAL	15.300

Q. B. S. 12/22
Junior Engineer

ASSTT. Engineer

Q. B. S. 12/22
E. Asstt. Engineer

P.D.R. Technically sanctioned for Rs 15.300 lacs (Rupees fifteen lacs & thirty thousand only)

Q. B. S. 12/22
Superintending Engineer
R.W.D. Work Circle, Siwan
12/04/2022


GENERAL ABSTRACT OF COST FOR MAINTENANCE OF ROAD

NAME OF ROAD :- MOTORABLE OF HAMIDPUR TO KRITPURA
DISTRICT :- GOPALGANJ
BLOCK :- BAIKUNTHPUR
DIVISION :- GOPALGANJ -2
TOTAL LENGTH OF THE ROAD :- 3.097 KM
DAMAGED LENGTH OF ROAD :- 0.338 KM

SL.No	DESCRIPTION	AMOUNT	1 % Labour Cess	12 % GST	1 % Labour Cess & 12 % GST AMOUNT (LAKHS)
	INITIAL RECTIFICATION INCLUDING SURFACE RENEWAL				
1	BRICK BATS	13.00	0.130	1.560	14.69
	SUB TOTAL	13.00	0.130	1.560	14.69
	Total Seigniorage Fee				0.609
	TOTAL COST OF PROJECT IN LAKHS	13.00	0.130	1.560	15.300


Junior Engineer

Asstt. Engineer


Executive Engineer

Name of Road

MOTORABLE OF HAMIDPUR TO KRITPURA

S.L No	SBD S.L No	MORD Ref No	DESCRIPTION	Unit	Quantity	Rate	Amount in Rs	Total Material Qty required (Cum)	Total Amount	Add 10 % Seigniorage Fee
--------	------------	-------------	-------------	------	----------	------	--------------	-----------------------------------	--------------	--------------------------

construction of subgrade and Earthen shoulders with approved material obtained from borrow pits with all lifts and lead ,
unit = cum

Taking output = 100 cum

Compensation for earth taken from private land

Cost for 100 cum = a

Rate per cum = (a)/100

100

34.82

34.82

34.82

34.82

1695.00

59019.90

Cum

Providing Brick bats including spreading laying hand packing and compacting with C.I

Taking Out put = 2.832

Material

III) Local Sand

Cost for 300 cum = A

Rate per cum = (A) /2.832

Cum

0.63

141.85

89.37

89.37

31.56

31.56

502.95

15870.90

1587.09

60606.99

Total Seigniorage Fee 60887.72

5/3/22

5/3/22