



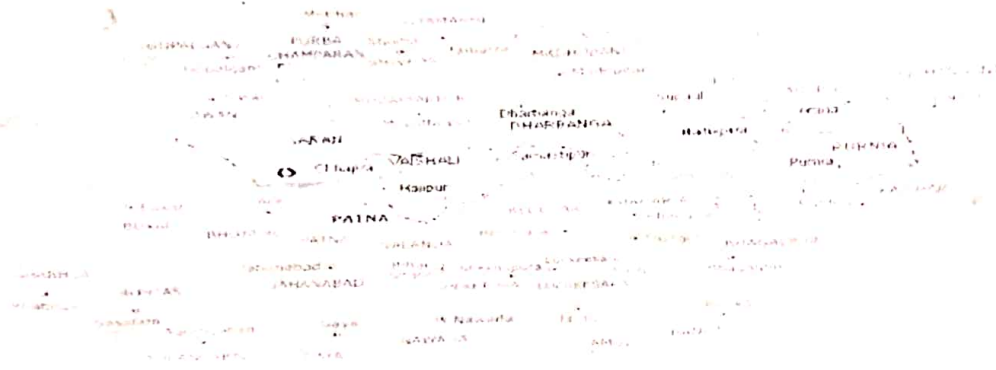
ग्रामीण कार्य विभाग

Rural Works Department, Govt of Bihar

FLOOD DAMAGED REPAIR (F.D.R)

2021-22

BIHAR



Name of Work :- Motorable work of Madhusarai pitch path to Paithan patti Pull Path

DISTRICT - GOPALGANJ

BLOCK - MANJHA

TOTAL LENGTH OF ROAD	:	1.500	KM
DAMAGED LENGTH OF ROAD	:	0.055	KM
TOTAL COST OF INITIAL RECTIFICATION FOR MOTORABLE WORK	:	9.382	Lac
CONTINGENCY CHARGE @ 0%	:	0.000	Lac
TOTAL COST OF PROJECT	:	9.382	Lac

SUBMITTED BY:- EXECUTIVE ENGINEER
R.W.D. WORKS DIVISION, GOPALGANJ-2

Inspection Report For Flood Damage Work

Date:

1. Name of PIUs: Wopalganj-2

2. Name of Block/Road: Memsha

A For Road

1. Damage Location/ Chainage : 0-200 , 300 to 500

2. Damage Length : 0.066 Km

3. Nature of Damage : Flood. Ditches developed.

4. Details of Restoration Works :

i. Material being used in Restoration Works : - Brick Bats Sand bags

ii. Equipments / Tools being used in Restoration Works : JCB, Tractor, Roller

iii. Procedure taken up in Restoration Works : As per SOP.

iv. Restored Length : 0.066 Km.

B For Bridge

1. Damage Location / Chainage :

2. Damage Length :

3. Nature of Damage :

4. Details of Restoration Works :

i. Material being used in Restoration Works :


ii. Equipments / Tools being used in Restoration Works :


iii. Procedure taken up in Restoration Works :

iv. Restored Length :

N.A


20/12/21
JE


20-12-21
AE


20/12/21
EE


26/12/21
Signature
(Name of inspector)

GENERAL ABSTRACT OF COST
Flood Damage Repair (FDR)

Block :- Manjha


District:- Gopalganj


Name of Work :- Motorable work of Madhusarai pitch path to Paithan patti Pull

Length:- 1.50 Km

SI No.	Description of Item	Amount	Add 12% GST	1% labour Cess	Total
1	Brick Bats	712,689.72	85522.7658	7126.8972	805,339.38
2	Sand Bag	1042.80	125.14	10.428	1,178.36
3	Hume Pipe	116508.30	13981.00	1165.083	131,654.38
	Sub Total Rs. :-				
			Say Rs. :-		938,172.00


20/12/21
Junior Engineer


20-12-21
Asstt. Engineer


20/12/21
Executive Engineer
R.W.D. Works Division, Gopalganj-2

DETAILED ESTIMATE FOR MOTORABLE WORK

Name of Work :- Motorable work of Madhusarai pitch path to Paithan patti Pull Path

Length:- 1.50 Km

SI No.	Description of Item	Chainage		No.	Length (M)	Avg. width (M)	Avg. Depth (M)	Qty	Unit	Unit rate (in Rs.)	Amount
		From	To								
1	Providing brick bats filled in ditches including all cost of material and labour in all respect complete the job as per direction of Engineer in Charge.	0	200	1	26.00	3.20	1.40	116.48	Cum		
		300	500	1	40.00	4.00	1.80	288.00	Cum		
								404.48	Cum	1761.99	712689.72
2	Labour for Filling Sand Bag, Stitching and Placing etc. all complete as per specification and direction of E/I.			1	60.00			60.00	No		
									No		
								Total Qty	60.00	No	17.38
											1042.80
3	Providing and laying 1000 mm dia NR 2 bumps	0	500	3	2.50	4.00		30.00	RM	3883.61	116508.30
										Add 12% GST	99628.90
										Add 1%	8302.41
										Sum Total	938172.12
										Say Rs.	938172.00

say Rs 9.382 lac

[Signature]
20/12/21
J.E.
Manjha

[Signature]
20/12/21
A.E.
Manjha

[Signature]
20/12/21
E.E.
Gopalganj-2

F.D.R. Technically Sanctioned for Rs 9.382 lac (Rupees Nine lac Thirty Eight Thousand & Two Hundred) only

[Signature]
21/04/22

अधीक्षण अभियंता
प्रमाणित कार्य विभाग कार्य प्रबंधन विभाग
[Signature]
21/04/22