

# **RURAL WORKS DEPARTMENT GOVT. OF BIHAR**



**Name of Work:- Samhauli Chowk to Waterweij Bandh.  
Block:- Pupri.**

**F.D.R**

**Rs. ~~599781.00~~ 398573**

**Year-2021-22**


**Name of Circle:- R.W.D. Works Circle, Sitamarhi.**

**Name of Division:- R.W.D. Works Division, Pupri.**



**बाढ़ क्षतिग्रस्त पथों का अन्तर प्रमंडलीय जाँच प्रतिवेदन हेतु प्रपत्र**

1	निरीक्षी पदाधिकारी का नाम एवं पदनाम:-	ई0 विनोद कुमार साह, कार्यपालक अभियंता, ग्रामीण कार्य विभाग, कार्य प्रमंडल, सीतामढ़ी।
2	निरीक्षण की तिथि:-	22-12-2021
3	पथ का नाम (शीर्ष के साथ)	Sankhali charak To waterway bandh.
4	पथ की लम्बाई	2.375 K.m.
5	कार्य प्रमंडल का नाम	ग्रामीण कार्य विभाग, कार्य प्रमंडल, पुपरी।
6	प्रखंड का नाम	पुपरी।
7	पथ की स्थिति	(Completed/Ongoing)
8	पथ अनुरक्षण अवधि में हैं	(Yes/No)
9	क्षतिग्रस्त भाग की लम्बाई	
10	क्षतिग्रस्त भाग में कराये गये कार्य का विवरणी (लम्बाई x ऊँचाई x गहराई)	<p>All Mesurment are attached in estimate</p> <p>Qty of Brick Bats :- 204.2400 m<sup>3</sup></p> <p>Qty of Rubbish:- 51.06 m<sup>3</sup></p> <p>Total Qty :- 255.3000 m<sup>3</sup></p> <p>Entered in MB No:- 2654</p> <p>Page No:- 2</p>
11	अस्थायी पुर्नस्थापन में किस-किस सामग्रीयों को उपयोग किया गया है। उसकी विवरणी	Brick Bats & Rubbish
12	अभ्युक्ति	संलग्न प्रद

  
 निरीक्षी पदाधिकारी का हस्ताक्षर  
 पदनाम सहित



# DETAILED ESTIMATE FOR F.D.R

## General Abstract of Cost

Name of Road:-Samhauri Chowk to Waterweij Bandh.

Length of Road:-2.375 Km

Block:-Pupri


District:-Sitamarhi

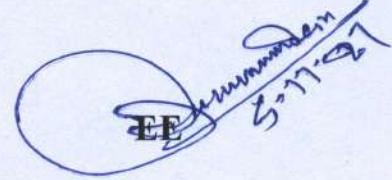
S. No.	Particulars	Total Cost (in Lakh)
1	Total Cost for Motorable Roads	<del>509258.00</del>
2	<del>Labour cess @1%</del>	<del>5092.58</del>
3	<del>GST @12%</del>	<del>61110.96</del>
4	<del>Seigniorage Fee @ 10%</del>	<del>24319.88</del>
5	Total Cost of Road Repair	<del>599781.42</del>

Say Rs. ~~599781.00~~

398573=00


  
JE

  
AE

  
EE

अभियंता प्रमुख ग्रामीण कार्य विभाग के पत्रांक-4849 दिनांक-07/12/2021 के आदेशानुसार प्रशासनिक स्वीकृति के प्रत्याशा में औपबंधित तकनीकी स्वीकृति प्रदान की जा रही हैं। प्रशासनिक स्वीकृति प्राप्त होने के उपरान्त पुनः तकनीकी स्वीकृति प्रदान की जायेगी।

औपबंधित तकनीकी स्वीकृति रुपये 398573=00 (Three Lacs Ninety Eight thousand five hundred Seventy Three) only की प्रदान की जाती हैं।



अधीक्षण अभियंता  
ग्रामीण कार्य विभाग  
कार्य अंचल, सीतामढ़ी




## Schedule of Quantity


ne of Road:-Samhauhi Chowk to Waterwej Bandh.

Sl. No.	Description of Item	Qty	Unit	Rate	Amount
1	Sand Filling in Foundation Trenches as per Drawing & Technical Specification.	0.00	Cum	4811.11	0.00
2	Providing and laying of Brick Bat obtained from Chimney with machanical means with all spreading, grading to required slope and compacted at OMC to achieve required density with all complete as per the direction of engineer in charge.	255.3000			0.00
	Less 20% for Voids	51.06			
		204.2400	Cum	2105.01	429927.2424
3	Single bamboo paiasiding/ walling of whole 2nd class bamboo (Jati or Bethua) 75mm dia and closely packed & driven including fitting fixing with half bamboo kamis horizontally in three rows with cane or tying with wire complete and Struts 1.5m apart longitudinally and providing brush wood as per drawing and technical specification clause 1302.5	0.00	m	140.4	0.00
4	Providing, Laying and placing empty cement bag filled with local sand including stiching with sutall etc. .... do.....do.....all complete job as per specification and direction of E/I. (including Royalty and all Taxes)	0.00	no.	9.63	0.00
5	Providing and Laying Reinforced Cement Concrete Pipe NP3 (dia 1000) as per design in Single Row with old available pipe	0.00	m	3400.00	0.00
6	Providing and Laying Reinforced Cement Concrete Pipe NP3 (dia 600) as per design in Single Row with old available pipe	0.00	m	850.00	0.00
7	Providing Quarry Material Rabbish for filling the voids in bricks bats .....do.....all complete job as per specification and direction of E/I.				
	Taking 20% of Brick Qty for Rabbish	51.06	Cum	1553.68	79330.9008

Total 509258.14  
Say 509258.00  
398573=00

  
JE

  
AE

  
5.11.21



# Details of Measurement of ditches filled by brick bats and rabbish

me of Road:-Samhauili Chowk to Waterwej Bandh.

	Nos.	L	W		H		VOLUME
Ch 0m	1	82.00	1.500	Av	1.450	Av	178.3500
Ch 2.200m (note Less 25% in H)	1	20.00	4.050	Av	0.950	Av	76.9500
		Total (in Cum)					255.3000
Laying Hume Pipe of 1000 mm dia		0	0		0		0.00
Laying Hume Pipe of 600 mm dia		0	0		0		0.00
Cement Bage							

*[Signature]*

JE

*[Signature]*  
5-11-24

AE

*[Signature]*  
S-11-24

EE