

RURAL WORKS DEPARTMENT GOVT. OF BIHAR



Name of Work:- Maharani Ashthan to SH Road Pupri Saidpur.
Block:- Pupri.

F.D.R

Rs. ~~341009.00~~ 227098.00


Year-2021-22

Name of Circle:- R.W.D. Works Circle, Sitamarhi.

Name of Division:- R.W.D. Works Division, Pupri.

बाढ़ क्षतिग्रस्त पथों का अन्तर प्रमंडलीय जाँच प्रतिवेदन हेतु प्रपत्र

1	निरीक्षी पदाधिकारी का नाम एवं पदनाम:-	ई0 विनोद कुमार साह, कार्यपालक अभियंता, ग्रामीण कार्य विभाग, कार्य प्रमंडल, सीतामढ़ी।
2	निरीक्षण की तिथि:-	22-12-2021
3	पथ का नाम (शीर्ष के साथ)	Maharani Ashthan to SH Road Pupri Saidpur.
4	पथ की लम्बाई	1.00 K.m.
5	कार्य प्रमंडल का नाम	ग्रामीण कार्य विभाग, कार्य प्रमंडल, पुपरी।
6	प्रखंड का नाम	पुपरी।
7	पथ की स्थिति	(Completed/Ongoing)
8	पथ अनुरक्षण अवधि में हैं	(Yes/No)
9	क्षतिग्रस्त भाग की लम्बाई	
10	क्षतिग्रस्त भाग में कराये गये कार्य का विवरणी (लम्बाई x ऊँचाई x गहराई)	All Mesurment are attached in estimate Qty of Brick Bats :- 116.3714 m³ Qty of Rubbish:- 29.09284 m³ Total Qty :- 145.4642 m³ Entered in MB No:- 2669 Page No:- 2
11	अस्थायी पुर्नस्थापन में किस-किस सामग्रीयों को उपयोग किया गया है। उसकी विवरणी	Brick Bats & Rubbish
12	अभ्युक्ति	स्वीकृत


 निरीक्षी पदाधिकारी का हस्ताक्षर
 पदनाम सहित

DETAILED ESTIMATE FOR F.D.R

General Abstract of Cost

Name of Road:-Maharani Ashthan to SH Road Pupri Saidpur.

Length of Road:- 1.00 Km


Block:-Nanpur

District:-Sitamarhi


S. No.	Particulars	Total Cost (in Lakh)
1	Total Cost for Motorable Roads	290164.00
2	Labour cess @1%	2901.64
3	GST @12%	34819.68
4	Seigniorage Fee @ 10%	13123.42
5	Total Cost of Road Repair	341008.74

Say Rs. ~~341009.00~~

227099.00



JE



AE



अभियंता प्रमुख ग्रामीण कार्य विभाग के पत्रांक-4849 दिनांक-07/12/2021


के आदेशानुसार प्रशासनिक स्वीकृति के प्रत्याशा में औपबंधित तकनीकी

स्वीकृति प्रदान की जा रही हैं। प्रशासनिक स्वीकृति प्राप्त होने के उपरान्त

पुनः तकनीकी स्वीकृति प्रदान की जायेगी।

औपबंधित तकनीकी स्वीकृति रुपये 227099.00 (Two Lac Twenty Seven Thousand.

Nine Nine) only की प्रदान की जाती हैं।


अधीक्षक अभियन्ता
ग्रामीण कार्य विभाग
कार्य अंचल, सीतामढ़ी

Schedule of Quantity


Name of Road:-Maharani Ashthan to SH Road Pupri Saidpur.


Sl. No.	Description of Item	Qty	Unit	Rate	Amount
1	Sand Filling in Foundation Trenches as per Drawing & Technical Specification.	0.00	Cum	488.11	0.00
2	Providing and laying of Brick Bat obtained from Chimney with machanical means with all spreading, grading to required slope and compacted at OMC to achieve required density with all complete as per the direction of engineer in charge.	145.4642			0.00
	Less 20% for Voids	29.09284			
		116.3714	Cum	2105.01	244962.877
3	Single bamboo paiasiding/ walling of whole 2nd class bamboo (Jati or Bethua) 75mm dia and closely packed & driven including fitting fixing with half bamboo kamis horizontally in three rows with cane or tying with wire complete and Struts 1.5m apart longitudinally and providing brush wood as per drawing and technical specification clause 1302.5	0.00	m	140.40	0.00
4	Providing, Laying and placing empty cement bag filled with local sand including stitching with sutall etc. do.....do.....all complete job as per specification and direction of E/I. (including Royalty and all Taxes)	0.00	no.	9.63	0.00
5	Providing and Laying Reinforced Cement Concrete Pipe NP3 (dia 1000) as per design in Single Row with old available pipe	0.00	m	3400.00	0.00
6	Providing and Laying Reinforced Cement Concrete Pipe NP3 (dia 600) as per design in Single Row with old available pipe	0.00	m	850.00	0.00
7	Providing Quarry Material Rabbish for filling the voids in bricks batsdo.....all complete job as per specification and diredtion of E/I.				
	Taking 20% of Brick Qty for Rabbish	29.09284	Cum	873.04	25398.00
				1553.68	45200.9637

Total ~~290163.84~~
Say ~~290164.00~~

227099.00


JE



AE



EE

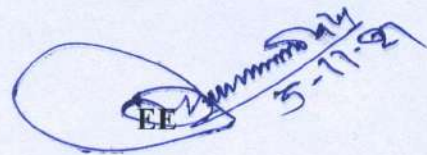
Details of Measurement of ditches filled by brick bats and rabbish

Name of Road:-Maharani Ashthan to SH Road Pupri Saidpur.

	L	W		H		VOLUME
CH 0 M	30.00	3.500	Av	0.45	Av	47.2500
	14.00	3.000		0.30	Av	12.6000
CH 500 M	30.00	2.250	Av	0.45	Av	30.3750
	11.00	2.700	Av	0.30	Av	8.9100
	17.00	2.950	Av	0.40	Av	20.0600
	3.00	0.500		0.30		0.4500
	9.00	2.500	Av	0.30	Av	6.7500
	6.00	1.450	Av	0.35	Av	3.0450
	2.00	0.600		0.30	Av	0.3600
	1.80	0.700		0.17	Av	0.2142
	2.00	0.600		0.20		0.2400
	2.50	2.000	Av	0.22		1.1000
CH 800 M	11.00	3.000		0.27		8.9100
	3.00	3.250	Av	0.30	Av	2.9250
	2.80	3.250	Av	0.25	Av	2.2750
	Total (in Cum)					145.4642
Laying Hume Pipe of 1000 mm dia	0	0		0		0.00
Laying Hume Pipe of 600 mm dia	0	0		0		0.00
Cement Bage						


JE


AE


EE