



ग्रामीण कार्य विभाग

Rural Works Department, Govt of Bihar

DETAILED PROJECT REPORT FOR MOTRABLE REPAIRING OF ROAD

F.D.R. MOTRABLE RESTORATION (YEAR - 2021)

L057-L056 TO AAMBARI (TRACK 57)

DETAILED ESTIMATE OF F.D.R. MOTRABLE REPAIRING ROAD

ROAD LENGTH	0 TO 1793	
DISTRICT	KISHANGANJ	
BLOCK	THAKURGANJ	
DIVISION	KISHANGANJ - 2	
TOTAL LENGTH OF ROAD	1.793	KM
TOTAL COST OF F.D.R. PART - A	Rs. 13.555	Lacs
ADD G.S.T @ 12%	Rs. 1.627	Lacs
ADD Labour Cess @ 1%	Rs. 0.136	Lacs
ADD Seigniorage Fee @ 10%	Rs. 0.656	Lacs
TOTAL COST OF RESTORATION WORK In Rs.	Rs. 15.974	Lacs


SUBMITTED BY
The Executive Engineer,
Works Division, Kishanganj - 2

प्रतिवेदन

प्रस्तुत प्राक्कलन ग्रामीण कार्य विभाग कार्य प्रमण्डल किशनगंज -2 अन्तर्गत 'Thakurpur' प्रखंड के पथ L057-L056 TO HAMPARI (T29015-57) (.....) जो विभागीय Online Morititring System MIS पर अपलोड है के बाढ़ 2021 से क्षतिग्रस्त हो जाने के कारण यातायात लायक Moterable हेतु बनाया गया है। इस कार्य को करने का निर्देश ग्रामीण कार्य विभाग, बिहार सरकार के पत्रांक:-मु0अ0-4(मु0) विविध (कार्य) -23-291/2019-4275/पटना, दिनांक-22/10/2021 से प्राप्त है। इस पत्र से Real time Geotagged Photographs को कार्य के दौरान अपलोड करते हुए (Moterable) कार्य कराना सुनिश्चित करने का निर्देश प्राप्त है।

उक्त निर्देश के आलोक में Local River अतिवृष्टि/बाढ़ उपधार से आए बाढ़ के कारण इस पथ के रोडवे के क्षतिग्रस्त हो जाने से सुरक्षित आवागमन हेतु Moterable कार्य कराया गया है। MIS में उपलोडेड फोटो दिनांक का Lat/Long के साथ लिया गया है। नेपाल तराई से निकलनेवाली इस नदी के तेज धार से इस पथ में कटाव की स्थिति बनी। मोटरेबल कार्य में आवश्यकतानुसार मिट्टी भराई, लोकल बालु भराई, खाली सिमेंट बैग में लोकल बालु भरकर, बॉस का पाइल, चचरी, बॉस का रनर, ह्यूम पाइप एवं ब्रिक बैट का इस्तेमाल किया गया है। निर्देशानुसार कराए गए कार्य कि Geotagged Photographs Real Time के साथ MIS पर उद्धत है। MIS की छायाप्रति, अपलोडेड फोटोग्राफ की छायाप्रति, दर विश्लेषण एवं विभागीय आदेशों की छायाप्रति प्राक्कलन में संलग्न की जा रही है। प्राक्कलन में प्रयुक्त दर अद्यतन है।

प्राक्कलन की यथाशीघ्र अनुमोदन अपेक्षित है ताकि अग्रेतर कार्रवाई की जा सके।


कनीय अभियंता

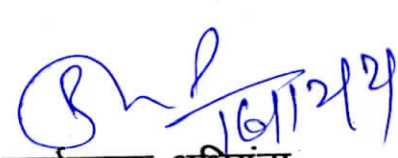
ग्रामीण कार्य विभाग

कार्य प्रशाखा, 6/3/2021


सहायक अभियंता

ग्रामीण कार्य विभाग

कार्य अवर प्रमंडल, 6/3/2021


कार्यपालक अभियंता

ग्रामीण कार्य विभाग

कार्य प्रमंडल किशनगंज-2

Inspection Report for Flood Damage Work

1. Name of PIUs

: Er. Uday Sankar Choudhary, EE Kishanganj

2. Name Of Block / Road

: Thakurganj / L55-L56 to Aambari (Tru-S)

A. For Road

1. Damage Location / Chainage

: 180.0 M

2. Damage Length

: 34 M

3. Nature Of Damage

: Road crust, culvert, flanks

4. Details Of Restoration

:

i) Material Being Used In Restoration

: Brick Bats

ii) Equipment / Tools Being Used In Restoration Works

: Tractor

iii) Procedure Taken Up In Restoration Works

: Manually

iv) Restored Length

: 34.0 M

B. For Bridge

1. Damage Location / Chainage

:

2. Damage Length

:

3. Nature Of Damage

:

4. Details Of Restoration

:

i) Material Being Used In Restoration

:

ii) Equipment / Tools Being Used in Restoration Works

:

iii) Procedure Taken Up In Restoration Works

:

iv) Restored Length

: 34.0 M

Work has been completed satisfactory

Signature of JE / AE / EE

Signature

(Name Of Inspector)

GENERAL ABSTRACT OF COST FOR MAINTENANCE OF ROAD

NAME OF ROAD : L057-L056 TO AAMBARI (TRACK 57)
DISTRICT KISHANGANJ
DIVISION KISHANGANJ - 2
BLOCK THAKURGANJ
LENGTH OF ROAD (IN KM) 1.793

Sl. No.	ITEM OF WORK	AMOUNT (LAKHS)
1	LOCAL SAND	0.000
2	HUME PIPE	0.000
3	BRICK BATS	13.555
4	SAND BAGS	0.000
5	BAMBOO WORK	0.000
6	STEEL DRUM SHEET	0.000
TOTAL COST OF PROJECT =		13.555
Add G.S.T. @ 12%		1.627
Add Labour Cess @ 1%		0.136
Add Seigniorage Fee @ 10%		0.656
Total Cost of Restoration Work =		15.974

J.E.
RWD

A.E.
RWD

E.E.
RWD

Technically sanction for Rs. 15974.00.00 (Rupees fifteen
Lacs ninety seven thousand four hundred) only

अधीक्षण अभियंता
ग्रामीण कार्य विभाग
कार्य अंचल, किशानगंज

B.O.

L.057-L.056 TO AAMBARI (TRACK 57)

SL No.	SDB SL.NO	MORD Ref.No	Description	Unit	NOS	LENGTH	WIDTH	HEIGHT	QUANTITY	RATE	AMOUNT (In Rs.)
1	4.5		Brick Bats								
			Providing Brick Bats including, Spreading, Laying Compacting with C.I. Hammer all complete job as per Specification and Direction E/I.								
			C/O To ANNEXURE "B"						625.010		
				Cum					625.010	2168.720	1355471.69
									Total Cost fo Flood Protective work (In Rs.) =		
									Total Cost fo Flood Protective work (In Lakh) =		
											13.555

Je.

22/10/21
A.E.

E.E.