

RURAL WORKS DEPARTMENT GOVT. OF BIHAR



Name of Work:- Kushail Gram Chowk to Bhitha Yadav Tola.
Block:- Pupri.

F.D.R

Rs. ~~591311.00~~ 342945.00


Year-2021-22

Name of Circle:- R.W.D. Works Circle, Sitamarhi.

Name of Division:- R.W.D. Works Division, Pupri.

बाढ़ क्षतिग्रस्त पथों का अन्तर प्रमंडलीय जाँच प्रतिवेदन हेतु प्रपत्र

1	निरीक्षी पदाधिकारी का नाम एवं पदनाम:-	ई0 विनोद कुमार साह, कार्यपालक अभियंता, ग्रामीण कार्य विभाग, कार्य प्रमंडल, सीतामढ़ी।
2	निरीक्षण की तिथि:-	22-12-2021
3	पथ का नाम (शीर्ष के साथ)	Rushail Green chowk To Baitha Jadar Tola.
4	पथ की लम्बाई	1.100 K.m
5	कार्य प्रमंडल का नाम	ग्रामीण कार्य विभाग, कार्य प्रमंडल, पुपरी।
6	प्रखंड का नाम	पुपरी।
7	पथ की स्थिति	(Completed/Ongoing)
8	पथ अनुरक्षण अवधि में हैं	(Yes/No)
9	क्षतिग्रस्त भाग की लम्बाई	
10	क्षतिग्रस्त भाग में कराये गये कार्य का विवरणी (लम्बाई x ऊँचाई x गहराई)	All Mesurment are attached in estimate Qty of Brick Bats :- 201.3555m³ Qty of Rubbish:- 50.338875m³ Total Qty :- 251.6944m³ Entered in MB No:- 2632 Page No:- 2
11	अस्थायी पुर्नस्थापन में किस-किस सामग्रीयों को उपयोग किया गया है। उसकी विवरणी	Brick Bats & Rubbish
12	अभ्युक्ति	सतोषप्रद


 निरीक्षी पदाधिकारी का हस्ताक्षर
 पदनाम सहित

DETAILED ESTIMATE FOR F.D.R

General Abstract of Cost

Name of Road:-Kushail Gram Chowk to Bhitha Yadav Tola.

Length of Road:-1.100 Km

Block:-Pupri

District:-Sitamarhi

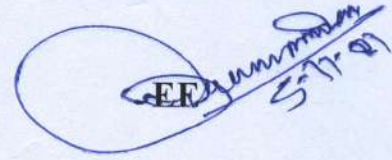
S. No.	Particulars	Total Cost (in Lakh)
1	Total Cost for Motorable Roads	502066.00
2	Labour cess @1%	5020.66
3	GST @12%	60247.92
4	Seigniorage Fee @ 10%	23976.41
5	Total Cost of Road Repair	591310.99

Say Rs. ~~591311.00~~

342945.00



JE


AE


EE

अभियंता प्रमुख ग्रामीण कार्य विभाग के पत्रांक-4849 दिनांक-07/12/2021 के आदेशानुसार प्रशासनिक स्वीकृति के प्रत्याशा में औपबंधित तकनीकी स्वीकृति प्रदान की जा रही हैं। प्रशासनिक स्वीकृति प्राप्त होने के उपरान्त पुनः तकनीकी स्वीकृति प्रदान की जायेगी।

औपबंधित तकनीकी स्वीकृति रुपये 342945.00/- (Three lakh forty two thousand nine hundred forty five only) की प्रदान की जाती हैं।



अधीक्षक अभियन्ता
ग्रामीण कार्य विभाग
कार्य अंचल, सीतामढ़ी

Schedule of Quantity


Name of Road:-Kushail Gram Chowk to Bhitha Yadav Tola.

Sl. No.	Description of Item	Qty	Unit	Rate	Amount
1	Sand Filling in Foundation Trenches as per Drawing & Technical Specification.	0.00	Cum	488.11	0.00
2	Providing and laying of Brick Bat obtained from Chimney with machanical means with all spreading, grading to required slope and compacted at OMC to achieve required density with all complete as per the direction of engineer in charge.	251.6944			0.00
	Less 20% for Voids	50.338875			
		201.3555	Cum	2105.01	423855.3411
3	Single bamboo paiasiding/ walling of whole 2nd class bamboo (Jati or Bethua) 75mm dia and closely packed & driven including fitting fixing with half bamboo kamis horizontally in three rows with cane or tying with wire complete and Struts 1.5m apart longitudinally and providing brush wood as per drawing and technical specification clause 1302.5	0.00	m	140.4	0.00
4	Providing, Laying and placing empty cement bag filled with local sand including stiching with sutall etc. do.....do.....all complete job as per specification and direction of E/I. (including Royalty and all Taxes)	0.00	no.	9.63	0.00
5	Providing and Laying Reinforced Cement Concrete Pipe NP3 (dia 1000) as per design in Single Row with old available pipe	0.00	m	3400.00	0.00
6	Providing and Laying Reinforced Cement Concrete Pipe NP3 (dia 600) as per design in Single Row with old available pipe	0.00	m	850.00	0.00
7	Providing Quarry Material Rabbish for filling the voids in bricks batsdo.....all complete job as per specification and diredtion of E/I.				
	Taking 20% of Brick Qty for Rabbish	50.338875	Cum	1553.68	78210.50331

Total ~~502065.84~~
Say ~~502066.00~~

392945.00


JE


AE


Engineer


Details of Measurement of ditches filled by brick bats and rabbish

Name of Road:-Kushail Gram Chowk to Bhitha Yadav Tola.

	Nos.	L	W		H		VOLUME
CH 50 M	1	30.00	3.150	Av	0.250	Av	23.6250
(Less 10% in H)	1	90.00	2.600	Av	0.500	Av	117.0000
CH 150 M	1	16.00	4.000	Av	0.800	Av	51.2000
	1	7.00	3.000		0.250	Av	5.2500
CH 300 M	1	6.00	2.500		0.400	Av	6.0000
	1	13.50	4.025	Av	0.650	Av	35.3194
	1	2.50	2.000		0.400		2.0000
	1	2.00	2.200		0.400	Av	1.7600
	1	2.00	1.000		0.400		0.8000
	1	4.60	2.000		0.950	Av	8.7400
		Total (in Cum)					251.6944
Laying Hume Pipe of 1000 mm dia		0	0		0		0.00
Laying Hume Pipe of 600 mm dia		0	0		0		0.00
Cement Bage							


JE


AE


EE