



ग्रामीण कार्य विभाग

Rural Works Department, Govt of Bihar

GOVT. OF BIHAR

FDR

YEAR 2021-22

Detailed Project Report

Division : Rosera

District :	Samastipur	Block :	Singhia
Name of Road :	<u>L055-T02 Sonsa Chouk To Basua (VR55)</u>		

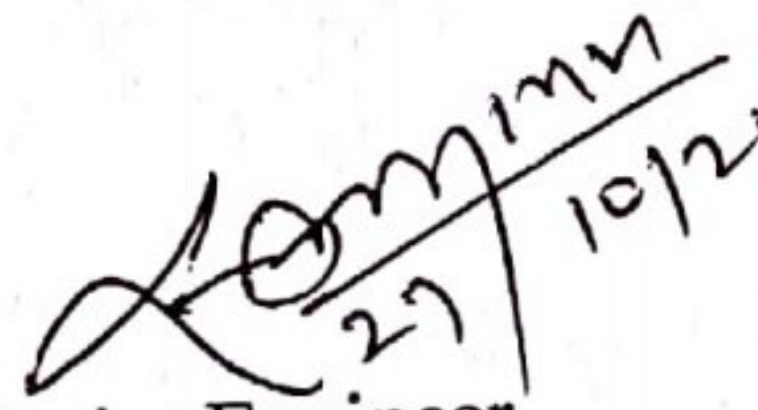
SUBMITTED BY
THE EXECUTIVE ENGINEER
WORKS DIVISION, ROSERA

तकनीकी प्रतिवेदन

पथ का नाम:— L055-T02 Sonsa Chouk To Basua (VR55)

प्राक्कलित राशि— ^{6.06} 8.59 लाख

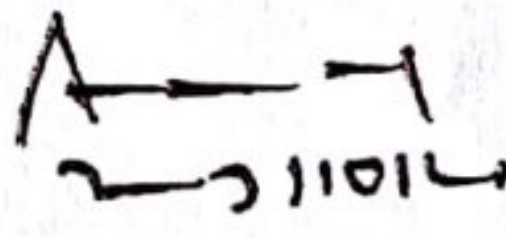
उपर्युक्त वर्णित पथ विगत बाढ़/बरसात वर्ष 2021-2022 से काफी छतिग्रस्त हो गए थे जिससे आवागमन काफी कठीनाईयुक्त हो गया था तथा दुर्घटनाए होती रहती थी जिसके कारण इस पथ को Brick bats आदि से भर कर मोटेरेबल किया गया है। पथ पर आवागमन जारी है।


Junior Engineer

RWD (w)Section , Singhia


23/10/21
Assistant Engineer

RWD (w)Sub Division , Singhia


Executive Engineer
RWD (w)
Division, Rosera

FDR

Detailed Estimate for

L055-T02 Sonsa Chouk To Basua (VR55)

Block : Singhia
District : Samastipur

ABSTRACT OF COST FOR ROAD

Sl No	Item of Work	Amount (In Rs)	
		As per Estimate	
1	Total Cost for Pavement Works		584254.11
	Total Cost of Project :	Rs -	584254.11
	Total Cost Including (GST + L.Cess) 13% :	Rs -	75953.03
	Total :	Rs -	660207.15
	Say (Lakh) :	Rs -	6.60

[Signature]
27/10/21

Junior Engineer
RWD (W) Section, Singhia

[Signature]
27/10/21

Asstt. Engineer
RWD (W) S. Div. Singhia

[Signature]
27/10/21

Executive Engineer
RWD (W) Div, Rosera

Technical approved for 6.60 lac say Six Lakh Sixty thousand and only including O.H. Charge.

[Signature]
10/12/21
बसोवत बसोवत
बायोप कार्य विभाग
बायोप कार्य विभाग
बायोप कार्य विभाग
T.A. 10/12/21

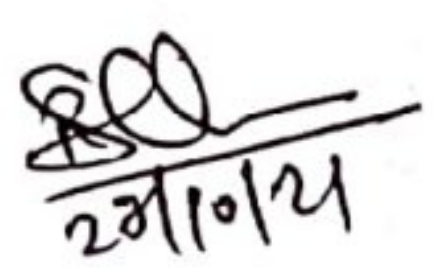
FDR
L055-T02 Sonsa Chouk To Basua (VR55)

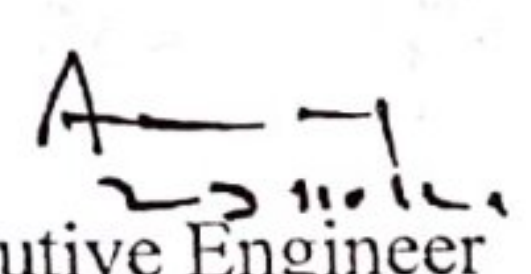
District : Samastipur
Block : Singhia

Total Length (Km): 2.50

BLOCK : Sigma										
SI No	Reference To Mord Spec.	Brief Description of Item	No	Measurements			Unit	Quantity	Rate (Rs)	Amount (Rs)
				L (m)	B (m)	D (m)				
1	401	Supply filling brick bat compacted manually								
			15	35.00	0.75	0.15	cum	59.06		
			1	5.00	1.25	0.10	cum	0.63		
			3	10.00	0.75	0.10	cum	2.25		
			7	25.00	0.50	0.10	cum	8.75		
			4	35.00	2.00	0.10	cum	28.00		
			6	20.00	0.50	0.10	cum	6.00		
			2	30.00	1.40	0.10	cum	8.40		
			10	20.00	1.50	0.10	cum	30.00		
			12	35.00	1.50	0.15	cum	94.50		
			9	25.00	0.50	0.10	cum	11.25		
			20	30.00	1.50	0.10	cum	90.00		
				Total Quantity :				cum	338.84	1724.29
			Total Cost of Pavement in Rs :							5.84

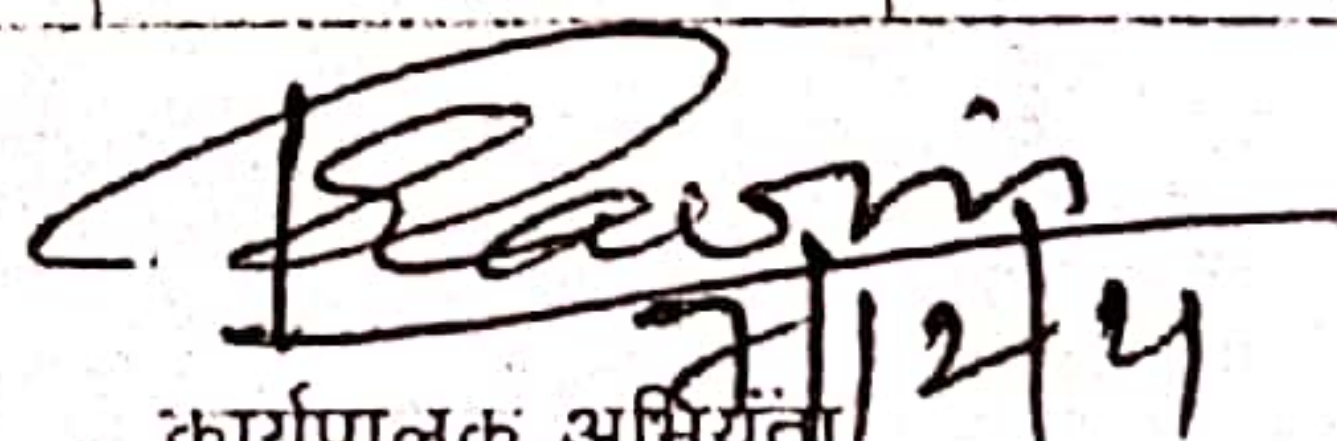

Junior Engineer
RWD (W) Section, Singhia


Asstt. Engineer
RWD (W) S. Div. Singhia


Executive Engineer
RWD (W) Div, Rosera

ग्रामीण कार्य विभाग, कार्य प्रमंडल-रोसाड़ा अंतर्गत FDR के तहत मरम्मत/Motorable कराए गये
पथों की जाँच की सूची।

क्र.सं.	प्रखंड	पथ का नाम	कराए गए कार्य	मरम्मत कराए जाने हेतु पथ की लंबाई किलोमीटर	मरम्मत कराए जाने हेतु पथ की राशी	अभियुक्ती
1	Singhia	MDR-Bhararia	Brick Bat Filling	0.400	9.47	पूर्ण
2	Singhia	PWD Path To Gadua	Brick Bat Filling	0.150	2.43	पूर्ण
3	Singhia	L070-T02 Bhairson To Bisaharia	Brick Bat Filling	0.900	6.95	पूर्ण
4	Singhia	Singhia To Kalali Chowk Path	Brick Bat Filling	0.2	3.82	पूर्ण
5	Singhia	L045-T01 To Behat (VR45)	Brick Bat Filling	0.3	8.73	पूर्ण
6	Singhia	T02 (Sonsa) To Parhat	Brick Bat Filling	0.4	4.91	पूर्ण
7	Singhia	L021-T01 TO JAMUA MOHIUDDINPUR	Brick Bat Filling	0.3	16.40	पूर्ण
8	Singhia	Improvement of road From Bharhar to Kanjara (Mhadalit Tola) To Pansalla mian road via Bangthaiya	Brick Bat Filling	3	13.93	पूर्ण
9	Singhia	Singhia Mahe Road To Petfora	Brick Bat Filling	2.275	3.45	पूर्ण
10	Singhia	L045-T02 Sonsa Chowk To Basua	Brick Bat Filling	2.5	6.60	पूर्ण
11	Singhia	Bara Chowk to Sonmani Via Laxminia	Brick Bat Filling	0.9	6.99	पूर्ण
12	Singhia	SH56 to Bharihar Tola	Brick Bat Filling	0.15	6.04	पूर्ण
13	Singhia	MMGS (Bharahar Pansalla) Path To Laxminia	Brick Bat Filling	0.25	5.83	पूर्ण
14	Singhia	Quotahar (T02) Mungelia	Brick Bat Filling	0.4	6.31	पूर्ण
15	Singhia	Improvement of Road from Bachhuliya to Akopur-Harpur-pabra- lind Phase	Brick Bat Filling	0.35	3.80	पूर्ण
16	Singhia	L073-T02 Navtoliya	Brick Bat Filling	0.4	5.21	पूर्ण
17	Singhia	T03 (Ilhau) to Kichaka Musahari Tola ward no. 01	Brick Bat Filling	0.7	5.49	पूर्ण
18	Singhia	L081-T01 to Dhakjari (VR81)	Brick Bat Filling	0.2	2.75	पूर्ण
19	Singhia	T01 Manu - Bela	Brick Bat Filling	0.3	19.79	पूर्ण
20	Singhia	L056-T02 To Jibudihuli (VR56)	Brick Bat Filling	0.3	5.85	पूर्ण
21	Singhia	Bharhar to Bhairson	Brick Bat Filling	0.8	6.31	पूर्ण
22	Singhia	Salehpur Path to Museur	Brick Bat Filling	0.375	4.13	पूर्ण
23	Singhia	T02 Diha To Murli Ward No 06	Brick Bat Filling	0.25	6.76	पूर्ण
24	Singhia	Salepur - Tenua Road	Brick Bat Filling	0.3	4.87	पूर्ण
25	Singhia	T02 Basopatti	Brick Bat Filling	0.45	7.95	पूर्ण
26	Singhia	T01 - Aurahi Bhair	Brick Bat Filling	0.25	4.97	पूर्ण
27	Singhia	Diha (Tenua) To Bharison (Bharhar)	Brick Bat Filling	0.3	3.49	पूर्ण
28	Singhia	Haripur Bela Path	Brick Bat Filling	0.6	5.46	पूर्ण
29	Singhia	L030-L025 to Rampura (VR30)	Brick Bat Filling	0.9	6.24	पूर्ण


कार्यपालक अभियंता

ग्रामीण कार्य विभाग, कार्य प्रमंडल-मझौल-बखड़ी