

RURAL WORKS DEPARTMENT



GOVERNMENT OF BIHAR

CIRCLE – R.W.D. works Circle, Kishanganj

DIVISION – R.W.D. works Division , Kishanganj-1

Name of Work :- T02 to Karhai Bari Mauza

Block :- KOCHADHAMAN

Total Length:- 0.800 KM

Damage Length:- 0.142 KM

Estimated cost :- Rs 667248.00


Year : 2021-22

प्रतिवेदन

प्रस्तुत प्राक्कलन ग्रामीण कार्य विभाग, कार्य प्रमंडल, किशनगंज-1 अंतर्गत कोचाधानन ग्रंथ के पथ "T02 to Karhai Bari Mauza" जो विभागीय Online Monitoring System MIS पर अपलोड है के बाद 2021 से क्षतिग्रस्त हो जाने के कारण यातायात लायक Motorable हेतु बनाया गया है। इस कार्य को कराने का निर्देश ग्रामीण कार्य विभाग, बिहार सरकार के पत्रांक- मु.अ. 4 (मु.0) विविध कार्य- 23-60/2020 - 1937 / पटना, दिनांक- 07.07.2021 से प्राप्त है। इस पत्र से Real time geo-tagged photograph को कार्य के दौरान अपलोड करते हुए (Motorable) कार्य करना सुनिश्चित करने का निर्देश प्राप्त है।

उक्त निर्देश के आलोक में Mahananda नदी उपधार नदी नदी उपधार से आर बाद के कारण इस पथ के Road way के क्षतिग्रस्त हो जाने से सुरक्षित आवागमन हेतु Motorable कार्य कराया गया है। MIS में अपलोड फोटो दिनांक 30/09/2021 का Lai Long के साथ लिया गया है। नेपाल तराई से निकलने वाली इस नदी के तेज धार से इस पथ में कटाव की स्थिति बनी। Motorable कार्य में आवश्यकता अनुसार Bamboo Pilling / Pitching of E.C. Bags filled with local sand / Local sand filling / Brick bats का इस्तेमाल किया गया है। Motorable कार्य करार यातायात बहाल कर दिया गया है। निर्देशानुसार कराये गए कार्य का Geo-tagged photo real time के साथ MIS पर अपलोड है। MIS की छायाप्रति, अपलोड फोटोग्राफ की छायाप्रति, दर विश्लेषण एवं विभागीय आदेशों की छायाप्रति प्राक्कलन में संलग्न की जा रही है। प्राक्कलन में प्रयुक्त दर अद्धतन है।

प्राक्कलन की यथा शीघ्र अनुमोदन अपेक्षित है ताकि अग्रतर कार्रवाई की जा सके।



कनीय अमियंता
ग्रामीण कार्य विभाग
कार्य प्रशाखा- कोचाधानन



सहायक अमियंता
ग्रामीण कार्य विभाग,
कार्य अवर प्रमंडल- कोचाधानन



कार्यपालक अमियंता
ग्रामीण कार्य विभाग
कार्य प्रमंडल, किशनगंज -1

Inspection Report for Flood Damage Work

1. Name of PIUs

: Kishanganj-1

2. Name Of Block / Road

: Toa to Kerhaibari mauza

A. For Road

1. Damage Location / Chainage

:

2. Damage Length

: 142 m

3. Nature Of Damage

: Damage and deep side cutting

4. Details Of Restoration

:

i) Material Being Used In Restoration

: sand, cement bag, bamboo, brick bats

ii) Equipment / Tools Being Used In Restoration Works

: tractor

iii) Procedure Taken Up In Restoration Works

: manually

iv) Restored Length

: 142 m

B. For Bridge

1. Damage Location / Chainage

:

2. Damage Length

:

3. Nature Of Damage

:

4. Details Of Restoration

:

NA

i) Material Being Used In Restoration

:

ii) Equipment / Tools Being Used in Restoration Works


:


iii) Procedure Taken Up In Restoration Works

:

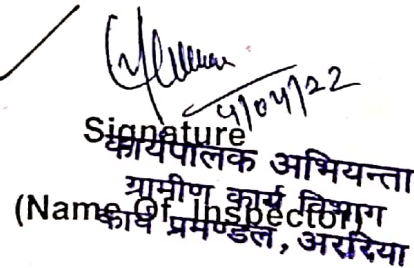
iv) Restored Length

: Satisfactory


Signature of JE / AE / EE



Signature of JE / AE / EE


Signature of JE / AE / EE


Signature
कार्यपालक अभियन्ता
ग्रामीण कार्य विभाग
(Name Of Inspector)
कोष प्रमण्डल, अररिया

ABSTRACT OF COST


Name of Work :-	T02 to Karhai Bari Mauza	
Block :-	KOCHADHAMAN	
Sl. No.	Particulars	Amount (In Rs.)
A	Cost of Restoration work :-	Rs 579546.00
B	Add 12 % GST	Rs 69546.00
C	Add 1 % L. Cess	Rs 5795.00
D	Add S.Fee @ 10 % of Material Cost	Rs 12361.00
Total Cost with GST, LC & S.Fee		Rs 667248.00


J.E
RWD
KOCHADHAMAN


A.E
R.W.D
KOCHADHAMAN



E.E
R.W.D
Kishanganj - I


Technically sanctioned for Rs 6,67,248 = IN (Six Lakh Sixty seven Thousands Two hundred Forty Eight) only



P. S. S. S.
06/04/22
E.O
अधीक्षक अभियन्ता
ग्रामीण कार्य विभाग
कार्य अंचल, किशनगंज

Detailed Estimate

Name of Work :-			T02 to Karhai Bari Mauza										
			Detailed Estimate										
Sl. No.	SDB Sl. No.	MORD Ref.No	Description	No.	No.	Length (M)	Width (M)	Height (M)	Qty.	Unit	Rate (Rs.)	Amount (Rs.)	
1	WRD	5.7.7	Providing bamboo piles including labour for cutting of 62 mm to 75 mm dia bamboo piles to size and making shoes and driving etc complete job as per specification and direction of E/I	1	710	2.00	-	-	1420.00				
									Total:-	1420.00	Mtr.	55.40	78662.00
2	WRD	5.7.9	Supplying, fitting and fixing 62 mm to 75 mm dia bamboo runners in position at every vertical pile with 150 mm long nails or 32 swg G.I. wire including cost of G.I. wire or nails, all material and labour complete job as per specification and direction of E/I.	2	1	142.00	-	-	284.00				
									Total:-	284.00	Mtr.	30.87	8767.00
3	WRD	5.7.40	Brick bats Providing laying and spreading brick bats in Road ditches all complete as per approved design, specifications and direction of E/I	1	1	142.00	(1.5+2.0)/2	0.25	62.13				
									Total:-	62.13	Cum	2168.72	134743.00
4		5.7.53	Providing and filling empty cement bags Supply of new bag with labour for filling new EC bag with local sand (volume of filled bag 1.2 cft and weight 50kg), stitching on two line by approved nylon thread with stitching machine & generator, stacking the bags and placing with a lead of 150m including supply of nylon threads etc all complete as per approved design, specification and direction of E/I.	1	1	142.00	(1.5+2.1)/2	(1.5+1.0)/2	319.50				
									Total:-	319.50	Cum		
									@ 0.034 Cum each bag	9397	No.	38.03	357368.00
												TOTAL	579546.00


J.E.
RWD
KOCHADHAMAN


A.E.
R.W.D
KOCHADHAMAN


E.E.
R.W.D
Kishanganj - I

ABSTRACT OF QUANTITY & COST

ABSTRACT OF QUANTITY & COST											
Sl No	Item of Works	Quantity	Unit	Earth Work	Stone Materials			Brick Bats	Local Sand	Total	
					26.5mm to 9.50mm	9.50mm to 4.75mm	4.75mm below				
1	Earth Work:-	0.00	Cum	0.000	-	-	-	-	-		
2	GSB (Gr.-II):-	0.00	Cum	-	0.000	0.000	0.000	-	-		
3	Brick Bats:-	62.13	Cum	-	-	-	-	74.556	-		
4	Local Sand Filling:-	0.00	Cum	-	-	-	-	-	0.000		
5	Providing & Filling Empty Cement Bags:-	9397.00	No.	-	-	-	-	-	319.498		
6	Providing & Filling Empty Cement Bags in Nylon Crate:-	0.00	No.	-	-	-	-	-	0.000		
		Total Quantity:-		0.000	0.000	0.000	0.000	74.556	319.498		
		Rate:-		Rs 34.78	Rs 285.35	Rs 285.35	Rs 285.35	Rs 1050.00	Rs 141.85		
		Total Amount:-		0.00	0.00	0.00	0.00	78284.00	45321.00	Rs 123605.00	
								S.Fee@10% of M.Cost:-			Rs 12361.00


 JE/RWD
 KOCHADHAMAN


 AE/RWD
 KOCHADHAMAN


 EE/RWD
 Kishanganj-1