

RURAL WORKS DEPARTMENT



GOVERNMENT OF BIHAR

CIRCLE – R.W.D. works Circle, Kishanganj

DIVISION – R.W.D. works Division , Kishanganj-1

Name of Work :- KASHIBARI PMGSY ROAD TO MIRZABAGH TOLA
Block :- KOCHADHAMAN
Total Length:- 1.600 KM
Damage Length:- 0.140 KM
Estimated cost :- Rs 1052303.00


Year : 2021-22

प्रतिवेदन


प्रस्तुत प्राक्कलन ग्रामीण कार्य विभाग, कार्य प्रमंडल, किशनगंज-1 अंतर्गत कोचाधामन प्रखंड के पथ "KASHIBARI PMGSY ROAD to MIRZABAGH TOLA" जो विभागीय Online Monitoring Syatem MIS पर अपलोड है के बाढ़ 2021 से क्षतिग्रस्त हो जाने के कारण यातायात लायक Motorable हेतु बनाया गया है | इस कार्य को कराने का निर्देश ग्रामीण कार्य विभाग, बिहार सरकार के पत्रांक:- मु0अ0- 4 (मु0) विविध कार्य- 23-60/2020 - 1937 / पटना, दिनांक- 07.07.2021 से प्राप्त है | इस पत्र से Real time geo-tagged photograph को कार्य के दौरान अपलोड करते हुए (Motorable) कार्य कराना सुनिश्चित करने का निर्देश प्राप्त है |

उक्त निर्देश के आलोक में Mahananda नदी उपधार नदी/नदी उपधार से आए बाढ़ के कारण इस पथ के Road way के क्षतिग्रस्त हो जाने से सुरक्षित आवागमन हेतु Motorable कार्य कराया गया है | MIS में अपलोडेड फोटो दिनांक 25/08/2021 का Lat/Long के साथ लिया गया है | नेपाल तराई से निकलने वाली इस नदी के तेज धार से इस पथ में कटाव की स्थिति बनी | Motorable कार्य में आवश्यकता अनुसार Bamboo Pilling / Pitching of E.C. Bags filled with local sand / Local sand filling / Brick bats का इस्तेमाल किया गया है | Motorable कार्य कराकर यातायात बहाल कर दिया गया है | निर्देशानुसार कराये गए कार्य का Geo-tagged photo real time के साथ MIS पर अपलोड है | MIS की छायाप्रति, अपलोडेड फोटोग्राफ की छायाप्रति, दर विश्लेषण एवं विभागीय आदेशों की छायाप्रति प्राक्कलन में संलग्न की जा रही है | प्राक्कलन में प्रयुक्त दर अद्धतन है |


प्राक्कलन की यथा शीघ्र अनुमोदन अपेक्षित है ताकि अग्रेतर कार्रवाई की जा सके |



कनीय अभियंता
ग्रामीण कार्य विभाग
कार्य प्रशाखा- कोचाधामन



सहायक अभियंता
ग्रामीण कार्य विभाग
कार्य अवर प्रमंडल- कोचाधामन



कार्यपालक अभियंता
ग्रामीण कार्य विभाग
कार्य प्रमंडल, किशनगंज -1

Inspection Report for Flood Damage Work

1. Name of PIUs

: Kishanganj-1

2. Name Of Block / Road

: Kashi Bari pmsy road mirzabag
Tola

A. For Road

1. Damage Location / Chainage

:

2. Damage Length

: 140 m

3. Nature Of Damage

: Damage and deep side cutting

4. Details Of Restoration

:

i) Material Being Used In Restoration

: sand, cement bag, Bamboo, Brick bats

ii) Equipment / Tools Being Used In Restoration Works

: Tractor

iii) Procedure Taken Up In Restoration Works

: manually

iv) Restored Length

: 140 m

B. For Bridge

1. Damage Location / Chainage

:

2. Damage Length

:

3. Nature Of Damage

:

4. Details Of Restoration

:

i) Material Being Used In Restoration

:

NA

ii) Equipment / Tools Being Used in Restoration Works

:

iii) Procedure Taken Up In Restoration Works

:

iv) Restored Length

:

Satisfactory

Signature
07/12/21


Signature

कार्यपालक अभियन्ता
(Name Of Inspector)
प्रमाणित कार्य विभाग
कार्य प्रमण्डल, अररिया


Signature of JE / AE / EE

ABSTRACT OF COST


Name of Work :-	KASHIBARI PMGSY ROAD TO MIRZABAGH TOLA	
Block :-	KOCHADHAMAN	
Sl. No.	Particulars	Amount (In Rs.)
A	Cost of Restoration work :-	Rs 919562.00
B	Add 12 % GST	Rs 110347.00
C	Add 1 % L. Cess	Rs 9196.00
D	Add S.Fee @ 10 % of Material Cost	Rs 13198.00
	Total Cost with GST, LC & S.Fee	Rs 1052303.00


J.E.
RWD

KOCHADHAMAN



A.E.
R.W.D

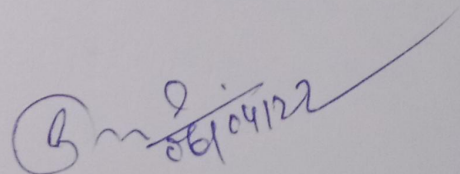
KOCHADHAMAN


E.E.
R.W.D

Kishanganj - I


Technically Sanctioned for Rs 10, 52, 303 = a
[Ten Lacs Fifty two thousand and three hundred
three] only.



Pallavi
06/04/22
E.O



अधीक्षण अभियन्ता
ग्रामीण कार्य विभाग
कार्य अंचल, किशनगंज

Detailed Estimate

Name of Work :-			KASHIBARI PMGSY ROAD TO MIRZABAGH TOLA									
Sl. No.	SDB Sl. No.	MORD Ref.No	Description	No.	No.	Length (M)	Width (M)	Height (M)	Qty.	Unit	Rate (Rs.)	Amount (Rs.)
1	WRD	5.7.7	Providing bamboo piles including labour for cutting of 62 mm to 75 mm dia bamboo piles to size and making shoes and driving etc complete job as per specification and direction of E/I	1	670	3.50	-	-	2345.00			
									Total:-	2345.00		
2	WRD	5.7.9	Supplying, fitting and fixing 62 mm to 75 mm dia bamboo runners in position at every vertical pile with 150 mm long nails or 38 swg G.I. wire including cost of G.I. wire or nails, all material and labour complete job as per specification and direction of E/I.	2	2	80.00	-	-	320.00	Mtr.	55.40	129913.00
									Total:-	320.00		
3	WRD	5.7.40	Brick bats Providing laying and spreading brick bats in Road ditches all complete as per approved design, specifications and direction of E/I	1	2	45.00	0.40	0.30	10.80			
				1	2	45.00	0.40	0.30	10.80			
				1	2	50.00	0.40	0.30	12.00			
									Total:-	33.60		
4		5.7.53	Providing and filling empty cement bags Supply of new bag with labour for filling new EC bag with local sand (volume of filled bag 1.2 cft and weight 50kg), stitching on two line by approved nylon thread with stitching machine & generator, stacking the bags and placing with a lead of 150m including supply of nylon threads etc all complete as per approved design, specification and direction of E/I.	1	2	45.00	0.80	2.50	180.00			
				1	2	45.00	0.80	3.50	252.00			
				1	2	50.00	0.80	2.50	200.00			
									Total:-	632.00	Cum	
									@ 0.034 Cum each bag	18588	No.	
											38.03	706902.00
											TOTAL	919562.00


J.E
RWD
KOCHADHAMAN


A.E
R.W.D
KOCHADHAMAN


E.E
R.W.D
Kishanganj - I

ABSTRACT OF QUANTITY & COST

Sl No	Item of Works	Quantity	Unit	Earth Work	Stone Materials				Brick Bats	Local Sand	Total
					26.5mm to 9.50mm	9.50mm to 4.75mm	4.75mm to below	4.75mm below			
1	Earth Work:-	0.00	Cum	0.000	-	-	-	-	-	-	
2	GSB (Gr.-II):-	0.00	Cum	-	0.000	0.000	0.000	0.000	-	-	
3	Brick Bats:-	33.60	Cum	-	-	-	-	-	40.320	-	
4	Local Sand Filling:-	0.00	Cum	-	-	-	-	-	-	0.000	
5	Providing & Filling Empty Cement Bags:-	18588.00	No.	-	-	-	-	-	-	631.992	
6	Providing & Filling Empty Cement Bags in Nylon Crate:-	0.00	No.	-	-	-	-	-	-	0.000	
		Total Quantity:-		0.000	0.000	0.000	0.000	0.000	40.320	631.992	
		Rate:-		Rs 34.78	Rs 285.35	Rs 285.35	Rs 285.35	Rs 285.35	Rs 1050.00	Rs 141.85	
		Total Amount:-		0.00	0.00	0.00	0.00	0.00	42336.00	89648.00	
									S.Fee@10% of M.Cost:-		
											Rs 131984.00
											Rs 13198.00

[Signature]
11-11-2024

JE/RWD
KOCHADHAMAN

[Signature]
10/11/24
AE/RWD

KOCHADHAMAN

[Signature]

EE/RWD
Kishanganj-1