



ग्रामीण कार्य विभाग

Rural Works Department, Govt of Bihar

PLAN HEAD- FDR YEAR 2021-22

DISTRICT :- EAST CHAMPARAN
BLOCK :- PHENHARA

Estimate for Repair of Road breaches
(Damaged by Flood) for Motorability in
PHENHARA SHEOHAR R.C.D ROAD To
KOTHI PARSAUNI

ESTIMATED COST -

8.785

10.374

Lacs

SUBMITTED BY:
EXECUTIVE ENGINEER,
RWD WORKS DIVISION,
PAKRIDAYAL

तकनीकी प्रतिवेदन

पथ का नाम:- ~~मेनहाल~~ शिवहर RCD रोड से कोलो परलोनी
प्रखंड का नाम :- मेनहाल
पथ की लम्बाई :- 1.58 किमी
शीर्ष:-
प्राक्कलित राशि:- mmmsy
योजना शीर्ष :- 10.374 लाख
FDR

उपरोक्त योजना का प्राक्कलन सचिव, ग्रामीण कार्य विभाग, बिहार पटना के पत्रांक 1937 दिनांक 07.07.2021 के द्वारा दिए गए निदेश के आलोक में एवं कार्यपालक अभियंता, ग्रामीण कार्य विभाग, कार्य प्रमंडल, पकड़ीदयाल के निदेशानुसार स्थल जॉचोपरान्त तैयार किया गया है। माह मई 2021 से अक्टुबर 2021 के बीच प्रलयकारी बाढ़ एवं अतिवृष्टि के कारण उक्त पथ में अनेक स्थानों पर कटाव हो गया था जिस कारण पथ से होकर आवागमन बाधित हो गया था। पथ से होकर तत्काल आवागमन चालू करने हेतु क्षतिग्रस्त भाग में तत्काल उपलब्ध हो सके सामग्री यथा-ईट टूकडा/स्थानीय बालू/ बॉस-बल्ला/ खाली सिमेंट बैग/ हयूम पाईप आदि आवश्यकतानुसार उपयोग करने का प्रावधान किया गया है। यह कार्य निदेशानुसार विभागीय रूप से करा दिया गया है।

यह प्राक्कलन अद्यतन अनुसूचित दर पर संवेदक लाभ रहित तैयार किया गया है। जनहित में इसकी स्वीकृति अपेक्षित है।


07.11.2021

कनीय अभियंता
ग्रामीण कार्य विभाग,
प्रशाखा, ~~मेनहाल~~

सहायक अभियंता
ग्रामीण कार्य विभाग,
कार्य अवर प्रमंडल,.....


07.11.2021

कार्यपालक अभियंता
ग्रामीण कार्य विभाग,
कार्य प्रमंडल, पकड़ीदयाल।

992652

GENERAL ABSTRACT OF COST

ESTIMATE FOR REPAIR OF ROAD BREACHES (DAMAGED BY FLOOD) FOR
MOTORIBILITY IN PHENHARA SHEOHAR R.C.D ROAD TO KOTHI PARSAUNI

DISTRICT - EAST CHAMPARAN

BLOCK - PHENHARA

SL. No.	Item of Work	Amount
1	EARTH WORK :	0.000 Lacs
2	BRICK BATS :	8.785 Lacs
3	SAND BAGS :	0.000 Lacs
4	HUME PIPE :	0.000 Lacs
	COST OF RESTORATION :	8.785 Lacs
	ADD SEIGNIORAGE FEE @ 10% OF MATERIAL COST :	0.447 Lacs
	ADD LABOUR CESS @ 1% :	0.088 Lacs
	ADD GST @ 12% :	1.054 Lacs
	TOTAL COST OF RESTORATION OF ROAD :	10.374 Lacs

10.374 Lacs

W. S. Gogoi
07.11.2021
Junior Engineer

Asstt. Engineer

W. S. Gogoi
07.11.2021
Executive Engineer

Name of Work:-

Estimate for Repair of Road breaches (Damaged by Flood) for Motorability in PHENHARA
SHEOHAR R.C.D ROAD To KOTHI PARSAUNI

Head - FDR

SI No.	Item No.	Name of Item	unit	No	Length	Width	Height	Qty.	Rate	Amount
1		EARTH WORK - Construction of embankment with approved material obtained from borrow pits with a lift upto 1.5 m, transporting to site, spreading, grading to required slope and compacting to meet requirement of Tables 300.1 and 300.2 with a lead upto 1000 m as per Technical Specification Clause 301.5	cum					0	183.70	0
2		Providing and Labour for laying dry graded Brick Bats including light ramming etc. all complete as per approved design, specification and direction of E/I.	cum					453.080	1938.89	878472.28
3		Providing, Filling Sand Bag, Stitching and Placing etc. all complete as per specification and direction of E/I.	Nos.					0.000	24.45	0.00
4		Providing and laying 1000 mm dia reinforced cement concrete pipe NP3 for culvert on first class bedding of granular material in single row excluding excavation, protection works, backfilling, concrete and masonry.	RM		0 Nos*2.5m			0.000	6086.50	0.00
5		Providing and laying 600 mm dia reinforced cement concrete pipe NP3 for culvert on first class bedding of granular material in single row excluding excavation, protection works, backfilling, concrete and masonry.	RM		0 Nos*2.5m			0.000	2545.18	0.00
TOTAL (in Re.)										878472.28

Wageen
07.11.2021
Junior Engineer,
Rural Works Department,
Works Section, PHENHARA

Assistant Engineer,
Rural Works Department,
Works Sub Division, PHENHARA

Executive Engineer,
Rural Works Department,
Works Division, PAKRIDAYAL

Post fact T.A.T.S is accorded for Rs. 8,78,500.00
Eight seventy eight thousand
hundred only.

S.E. (R.W.D.)
works Circle
Motihari

SEIGNIORAGE FEE CALCULATION SHEET

[illegible]

Name of Work:-

**Estimate for Repair of Road breaches (Damaged by Flood) for
Motorability in PHENHARA SHEOHAR R.C.D ROAD To
KOTHI PARSAUNI**

Rothi ParSauni

Appendix - II					
Measurement for surfacing the Breach with Brick Bats					
Sl. No.	Chainage (M)	Length (M)	Av. Width (M)	Thickness (M)	Quantity (cum)
1	0-500	7.000	0.780	1.200	6.552
2		5.000	0.850	0.650	2.763
3		7.500	0.900	0.450	3.038
4		10.500	2.500	1.300	34.125
5		3.500	2.500	0.650	5.688
6	700-1400	5.200	2.200	0.750	8.580
7		8.500	3.400	0.650	18.785
8		9.600	3.000	0.450	12.960
9		8.000	3.000	0.400	9.600
10		5.500	1.500	0.450	3.713
11		12.500	3.000	1.500	56.250
12		3.500	2.800	0.350	3.430
13		12.300	2.500	1.450	44.588
14		52.600	3.300	1.400	243.012
		Total			453.08
	Deduction for 0Nos old 1000 mm HP at 0 m (3.142*0.36*0)				0.00
	Deduction for 0Nos old 600 mm HP at 0 m (3.142*0.22*0)				0.00
	Net Quantity of Brick Bats				453.08

W. Sanyal
07.11.2021
Junior Engineer

Asistant Engineer

7/11/2021
Executive Engineer

BRICK BATS PITCHING MANUAL MEANS

6.6.1 WRD Bihar	Labour for laying dry graded Jhama Khoa or stone filter under Brick Pitching or Boulder Pitching in slope or apron including light ramming etc. all complete as per approved design, specification and direction of E/I.				
	Unit :- Per Cum				
	Taking Output = 2.832 Cum				
	Unskilled Mazdoor	Nos.	3	304.00	912.00
	Rate for 2.832 Cum				912.00
	Rate per Cum (Rs.) -				322.03
1.4 RCD	Cost of Haulage Excluding Loading and Unloading				
	Haulage of materials by Tractor excluding cost of loading, unloading and stacking.				
	Unit = t.km				
	Taking output 3.60 tonnes load and lead 10 km = 36.0 t.km				
	(i) Surfaced Road				
	Speed with load : 15 km / hour.				
	Speed while Returning empty :25 km / hour.				
	a) Machinery.				
	Tractor 3.6 tonne capacity				
	Time taken for onward haulage with load	hour	0.667	612.00	408.20
	Time taken for empty return trip.	hour	0.400	612.00	244.80
	cost for 36 t km = a+b+c				653.00
	Rate per t.km = (a+b+c)/36				18.14
	Say Rs. -				18.14
	(ii) Unsurfaced Graveled Road				
	Speed with load: 12 km / hour				
	Speed for empty return trip :20 km / hour				
	a) Machinery				
	Tractor 3.6 tonnes capacity				
	Time taken for onward haulage with load	hour	0.833	612.00	509.80
	Time taken for empty return trip hour 0.5	hour	0.500	612.00	306.00
	Cost for 36 t .km = a+b+c 840.34				815.80
	Rate per t.Km = (a+b+c)/36				22.66
	Say Rs. -				22.66

1.1 RCD	Loading and Unloading of Stone Boulder/ Stone aggregates/Brick Bats/Jhama Metal/Sand /Kanker/Moorum			
	Placing Tractor at loading point, loading with frontloader, dumping, turning for return trip, excluding for haulage and return trip			
	Unit = cum			
	Taking output = 2.25 cum			
	Time required for			
	i) Positioning of Tractor at loading point	1 Min		
	ii) Loading by front end loader 1 cum bucket capacity @ 25 cum per hour	5 Min		
	iii) Maneuvering, reversing, dumping and turning for return	0 Min		
	iv) Waiting time, unforeseen contingencies etc	0 Min		
	Total	6 Min		
	a) Labour			
	Mate	day	0.03	321.00
	Mazdoor for loading and unloading	day	0.72	304.00
	b) Machinery			
	Tractor 3.60 tonnes capacity	hour	0.1	612.00
	Front end-loader 1 cum bucket capacity @ 25 cum/hour	hour	0.083	1594.00
	Cost for 2.25 cum = a+b+c+d			422.01
	Rate per cum = (a+b+c+d)/ 2.25			187.56
Note:-	Unloading will be done manually.			
1.	Supplying for Brick Bats			
A.	Basic Rate of Brick Bats	Per Cum	987.00	987.00
	Total -			987.00
	Surface Lead	KM	7	
	Unsurface Lead	KM	1	
	Factor (3.6/2.25)	Cum	1.60	
B.	Carriage			
	(1.6 x 7 x 18.14) + (1.6 x 1 x 22.66) + 187.56			426.98
C.	Cost of Labour for Pitching and Light Ramming as per WRD SOR 6.6.1			322.03
	Total (A+B+C) -			1736.01
	Total Cost per Cum		Rs.-	1736.01




22/11/21
A22

22/11/21
A22



Latitude: 26.505928
 Longitude: 85.194239
 Elevation: 108.79459 m
 Accuracy: 192.7 m
 Time: 22-10-2021 17:02
 Note: Pheniana Sheohar RCD road to Kothi Parsauri

Powered by InstaCam

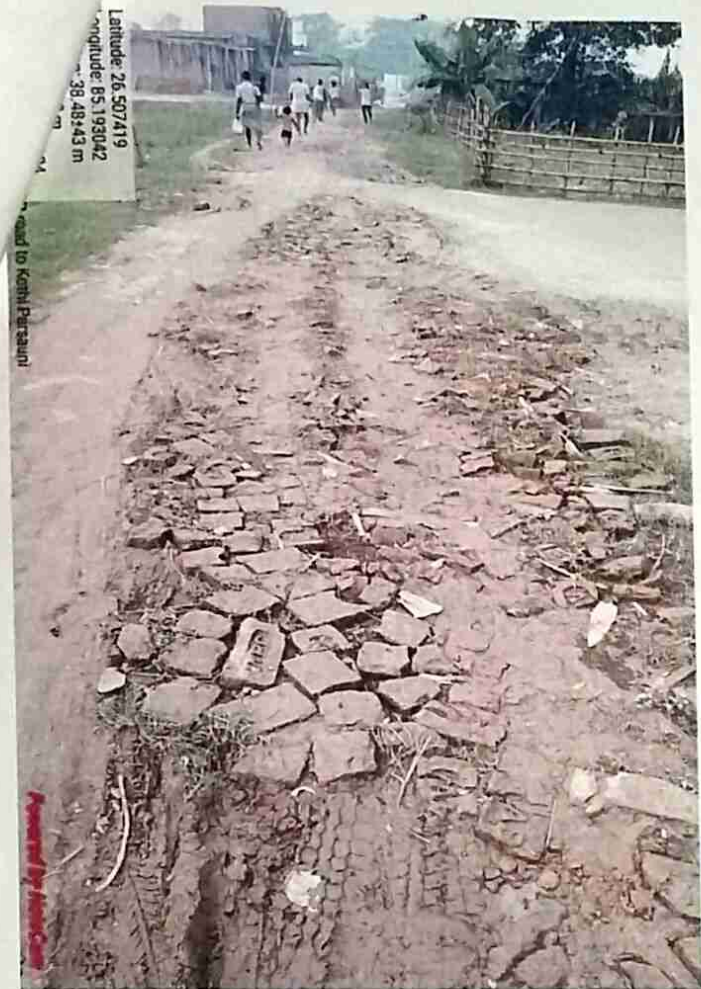

Latitude: 26.507419
 Longitude: 85.193042
 Elevation: 38.48343 m
 Accuracy: 192.7 m
 Time: 22-10-2021 16:53
 Note: Pheniana Sheohar RCD road to Kothi Parsauri

Powered by InstaCam



Latitude: 26.507434
 Longitude: 85.193047
 Elevation: 51.77453 m
 Accuracy: 69.9 m
 Time: 22-10-2021 17:04
 Note: Pheniana Sheohar RCD road to Kothi Parsauri

Powered by InstaCam



Latitude: 26.502693
 Longitude: 85.196691
 Elevation: 62.09423 m
 Accuracy: 24.9 m
 Time: 22-10-2021 16:53
 Note: Pheniana Sheohar RCD road to Kothi Parsauri

Powered by InstaCam

22/10/21
 Jit

22/10/21

22/10/21

Inspection Report For Flood Damage Work

Date :-

1. Name of PIUs- Executive Engineer, RWD. (W.D), Pakridayal.
2. Name of Block – Phenhara.
3. Name of Road – PHENHARA SHEOHAR R.C.D ROAD TO KOTHI PARSAUNI.

(A) For Road

1. Damage Location/Chainage :- 0.100 To 0.500 & 0.700 To 1.400
2. Damage Length :- 151.200 Meter.
3. Cause of Damage :- Due To Flood 2021/ Heavy Rain.
4. Nature of Damage :- Ditches/Breaches
5. Details of Restoration Work :-
 - (i) Material being used in restoration works :- Bricks Bat/Jhamma Metal/ Rabis/Hume Pipe.
 - (ii) Equipment/Tools being used in restoration Works :- J.C.B./Tractor/Trolley/Others
 - (iii) Procedure Taken up in restoration works :- Emergent Repair.
 - (iv) Restored Length :- 151.200 Meter.

work found satisfactory.

30/11/21
AE

30.11.21
Signature of Inspecting officer
(Executive Engineer)
R.W.D. (W.D) Dhaka.

अधीक्षण अभियंता का कार्यालय
ग्रामीण कार्य विभाग, कार्य अंचल, मोतिहारी

कार्यालय आदेश

कार्यालय आदेश संख्या—

दिनांक 04/10/2021

विभागीय निर्देशानुसार वर्ष 2021 के बाढ़ एवं अतिवृष्टि से ग्रामीण कार्य विभाग के पथों एवं पुलों में हुई क्षति के कारण आवागमन को सूचारु करने हेतु युद्ध स्तर पर कार्य प्रमंडलों को कार्य कराने का निर्देश प्राप्त है। इस सम्बन्ध में सचिव, ग्रामीण कार्य विभाग, बिहार पटना के निर्देश के आलोक में इन सभी कार्यों की भौतिक सत्यापन हेतु इस कार्य अंचल में पदस्थापित कार्यपालक अभियंताओं के बीच प्रमंडलवार जाँच कार्य हेतु निम्नवत कार्य क्षेत्र आवंटित किया जाता है।

क्रमांक	वर्तमान पदस्थापन कार्य प्रमंडल का नाम	जाँच हेतु आवंटित कार्य प्रमंडल का नाम
1	कार्यपालक अभियंता, मोतिहारी	कार्य प्रमंडल ढाका
2	कार्यपालक अभियंता, रक्सौल	कार्य प्रमंडल चकिया
3	कार्यपालक अभियंता, अरेराज	कार्य प्रमंडल मोतिहारी
4	कार्यपालक अभियंता, चकिया	कार्य प्रमंडल अरेराज
5	कार्यपालक अभियंता, ढाका	कार्य प्रमंडल पकड़ीदयाल
6	कार्यपालक अभियंता, पकड़ीदयाल	कार्य प्रमंडल रक्सौल

EO

अधीक्षण अभियंता
ग्रामीण कार्य विभाग,
कार्य अंचल, मोतिहारी

ज्ञापांक— 844

दिनांक 04/10/2021

प्रतिलिपि— कार्यपालक अभियंता, ग्रामीण कार्य विभाग, कार्य प्रमंडल मोतिहारी/रक्सौल/अरेराज/चकिया/ढाका/पकड़ीदयाल को सूचनार्थ एवं आवश्यक कार्रवाई हेतु प्रेषित।

अधीक्षण अभियंता
ग्रामीण कार्य विभाग,
कार्य अंचल, मोतिहारी

4/10/21

अधीक्षण अभियंता का कार्यालय
ग्रामीण कार्य विभाग, कार्य अंचल, मोतिहारी

पत्रांक 308 अनु0

मोतिहारी, दिनांक 19/04/2022

प्रेषक:-

अधीक्षण अभियंता
ग्रामीण कार्य विभाग
कार्य अंचल मोतिहारी

सेवा में,

कार्यपालक अभियंता
ग्रामीण कार्य विभाग
कार्य प्रमंडल पकड़ीदयाल

विषय :- कार्य प्रमंडल पकड़ीदयाल के अधीन वर्ष 2021 के बाढ़ एवं अतिवृष्टि से क्षतिग्रस्त पथों/पुलियों के कार्योंत्तर तकनीकी स्वीकृति उपरान्त अग्रेतर कार्रवाई के सम्बन्ध में।

प्रसंग :- आपका पत्रांक- अनु0 दिनांक-
महाशय,

उपर्युक्त विषयक प्रासांगिक पत्र द्वारा प्राप्त कार्य प्रमंडल पकड़ीदयाल के अधीन वर्ष 2021 के बाढ़ एवं अतिवृष्टि से क्षतिग्रस्त निम्नलिखित पथों का प्राक्कलन कार्योंत्तर तकनीकी स्वीकृति उपरान्त अग्रेतर कार्रवाई हेतु वापस किया जाता है।

क्र.सं	पथ का नाम	लम्बाई (कि०मी०में)	राशि (लाख में)
1	Madhubani Pokhra to Dhumnagar	2.770	2.831
2	Pipra to Mohan Marpa	2.690	3.147
3	Bara Parsauni to Godhia Tola	1.500	7.063
4	Phenhara High School to Rupauliya Mushar tola	2.550	7.489
5	Kakrahiya RCC Bridge to Matharwa Dalit Basti	1.300	6.389
6	Marpa to Rajpur Kawl tola Birit	1.760	5.859
7	Phenhara Prakhanda Antegat Rupaulia Panchayat ke Phulwaria Gaon ke Mahadalit	1.665	3.860
8	Phenhara to Ijorbara	4.780	6.932
9	NHPC Pokhra to Mankarwa	2.281	2.412
10	Deokuliya Phenhara Road to Bari Tola	1.233	0.159
11	Shekhauna to Marpakothi	3.200	1.014
12	Deokuliya chowk to Ratanwa	4.500	6.495
13	Phenhara Darhapur to Pipra Karimdad	1.228	2.495
14	Parsauni Munnial Rai House to Harnathpur River		10.489
15	Phenhara Sheohar RCD Road to Kothi Parsauni		8.785
16	Dhanauji REO Road to Bheriyahi	4.350	10.458
17	Sati Ashtan to PMGSY	0.700	0.960
18	L033 Pakridayal to Chhapra Bhikhari VR1)	4.030	11.588

19	Madhuban Melabazar to Lohargama		12.230
20	Pakridayal Dhaka Road to Harnathpur (Shikarganj Harnathpur)		22.364
21	PWD Road at Chaitya Village of Chaitya Panchayat to Chaitya Hajamtoli Mahadalit Basti		5.107
22	Banjariya to Madhuban Sheohar Sima	2.850	7.548
23	Madhuban to Naurangia	3.180	1.928
24	Wajitpur Sirauli Road Kushwaha tola to Bahuara Teli tola	0.735	2.501
25	Madhuban to Maaripur Maal	5.100	3.778
26	Koriya Kajaraha Nonia tola to Madhuban Sheohar Road	0.850	0.377
27	Wajitpur Sirauli Road to Bahuara Kushwaha Tola	2000	0.14
28	Pundar to Dubha	2.320	2.714
29	Sheohar Kajaraha RCD Road to Delho	1.513	1.206
30	Kauriya to Dubha	5.443	10.488

अनु०- यथोक्त ।

विश्वासभाजन

अधीक्षण अभियंता
ग्रामीण कार्य विभाग,
कार्य अंचल, मोतिहारी

ज्ञापक- 308

दिनांक- 19/04/2022

प्रतिलिपि-नोडल पदाधिकारी, (FDR) ग्रामीण कार्य विभाग, बिहार पटना को सूचनार्थ समर्पित ।

अधीक्षण अभियंता
ग्रामीण कार्य विभाग,
कार्य अंचल, मोतिहारी