

RURAL WORKS DEPARTMENT



GOVERNMENT OF BIHAR

CIRCLE – R.W.D. works Circle, Kishanganj

DIVISION – R.W.D. works Division , Kishanganj-2

Name of Work :- GARWANDANGA HAT TO SURIBHITHA

Block :- Dighalbank

Estimated cost :- Rs 1604323.00

Year : 2021-22

Inspection Report for Flood Damage Work

Name of PIUs : Kishanganj - 02
Name Of Block / Road : Dighalbank
A. For Road : Garwandanga hat to Surubhatha
Damage Location / Chainage :
Damage Length : 128m
Nature Of Damage : Cut and erosion of flanked crust
Details Of Restoration : Sand, Filling, Laying, Brick Bat, RCC Pipe NPS
Material Being Used In Restoration : Sand, Brick Bat, GSB, RCC Pipe NPS
Equipment / Tools Being Used In Restoration Works : Tractor, trolley JCB
Procedure Taken Up In Restoration Works : Manually
iv) Restored Length : 128m

B. For Bridge

1. Damage Location / Chainage :
2. Damage Length :
3. Nature Of Damage :
4. Details Of Restoration :
i) Material Being Used In Restoration :
ii) Equipment / Tools Being Used in Restoration Works :
iii) Procedure Taken Up In Restoration Works :
iv) Restored Length :

Satisfactory.

Signature of JE / AE / EE

Signature

(Name Of Inspector)

प्रतिवेदन

प्रस्तुत प्राक्कलन ग्रामीण कार्य विभाग, कार्य प्रमंडल, किशनगंज-1 अंतर्गत दीघलबैंक प्रखंड के पथ "GARWANDANGA HAT TO SURIBHITHA" जो विभागीय Online Monitoring Syatem MIS पर अपलोड है के बाद 2021 से क्षतिग्रस्त हो जाने के कारण यातायात लायक Motorable हेतु बनाया गया है। इस कार्य को कराने का निर्देश ग्रामीण कार्य विभाग, बिहार सरकार के पत्रांक:- मु0अ0- 4 (मु0) विविध कार्य- 23-60/2020 - 1937 / पटना, दिनांक- 07.07.2021 से प्राप्त है। इस पत्र से Real time geo-tagged photograph को कार्य के दौरान अपलोड करते हुए (Motorable) कार्य कराना सुनिश्चित करने का निर्देश प्राप्त है।

उक्त निर्देश के आलोक में ककड़ नदी उपधार नदी/नदी उपधार से आए बाढ़ के कारण इस पथ के Road way के क्षतिग्रस्त हो जाने से सुरक्षित आवागमन हेतु Motorable कार्य कराया गया है। MIS में अपलोडेड फोटो क्षतिग्रस्त होने का, कार्य होने के दौरान का एवं पुनः स्थापित हो जाने के बाद का Lat/Long रियल टाइम के साथ लिया गया है। नेपाल तराई से निकलने वाली इस नदी के तेज धार से इस पथ में कटाव की स्थिति बनी। Motorable कार्य में आवश्यकता अनुसार Bamboo Pilling / Pitching of E.C. Bags filled with local sand / Local sand filling / Brick bats का इस्तेमाल किया गया है। Motorable कार्य कराकर यातायात बहाल कर दिया गया है। निर्देशानुसार कराये गए कार्य का Geo-tagged photo real time के साथ MIS पर अपलोड है। MIS की छायाप्रति, अपलोडेड फोटोग्राफ की छायाप्रति, दर विश्लेषण एवं विभागीय आदेशों की छायाप्रति प्राक्कलन में संलग्न की जा रही है। प्राक्कलन में प्रयुक्त दर अद्धतन है।

प्राक्कलन की यथा शीघ्र अनुमोदन अपेक्षित है ताकि अग्रेतर कार्रवाई की जा सके।


कनीय अभियंता

ग्रामीण कार्य विभाग

कार्य प्रशाखा- दीघलबैंक


सहायक अभियंता

ग्रामीण कार्य विभाग

कार्य अवर प्रमंडल- दीघलबैंक


कार्यपालक अभियंता


ग्रामीण कार्य विभाग

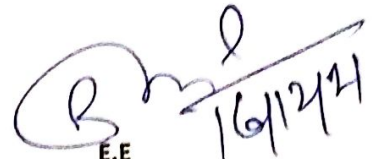
कार्य प्रमंडल, किशनगंज -2

ABSTRACT OF COST

Name of Work :-		GARWANDANGA HAT TO SURIBHITHA
Block :-		Dighalbank
Sl. No.	Particulars	Amount (In Rs.)
A	Cost of Restoration work :-	Rs 1365230.00
B	Add 12 % GST	Rs 163828.00
C	Add 1 % L. Cess	Rs 13652.00
D	Add S.Fee @ 10 % of Material Cost	Rs 61613.00
	Total Cost with GST, LC & S.Fee	Rs 1604323.00


J.E.
R.W.D
Dighalbank


A.E.
R.W.D
Dighalbank


E.E.
R.W.D
Kishanganj - 2

Technically sanction for Rs 1604323.00 (Rupees. Sixteen Lacs four thousand three hundred twenty three) only.


P. O.
04/04/22


अधीक्षण अभियंता
ग्रामीण कार्य विभाग
काय अंचल, किशनगंज
04.04.22

Detailed Estimate

Name of Work :- GARWANDANGA HAT TO SURIBHITHA


Sl. No.	SDB Sl. No.	MORD Ref.No	Description	No.	No.	Length (M)	Width (M)	Height (M)	Qty.	Unit	Rate (Rs.)	Amount (Rs.)
1	WRD	5.7.7	Providing bamboo piles including labour for cutting of 62 mm to 75 mm dia bamboo piles to size and making shoes and driving etc complete job as per specification and direction of E/I	0	0	0.00	-	-	0.00			
				0	0	0.00	-	-	0.00			
									Total:-	0.00 Mtr.	52.24	0.00
2	WRD	5.7.8	Providing, fitting and fixing split bamboo woven chachari in position with 20 swg G.I. wire or 75 mm to 100 mm long nails alternatively including cost of G.I. wire or nails, bamboo labour for complete job as per specification and direction of E / I.	0	0	0.00	0.00	-	0.00			
				0	0	0.00	0.00	-	0.00			
									Total:-	0.00 Sqm	426.14	0.00
3	WRD	5.7.9	Supplying, fitting and fixing 62 mm to 75 mm dia bamboo runners in position at every vertical pile with 150 mm long nails or 38 swg G.I. wire including cost of G.I. wire or nails, all material and labour complete job as per specification and direction of E/I.	0	0	0.00	-	-	0.00			
				0	0	0.00	-	-	0.00			
									Total:-	0.00 Mtr.	27.71	0.00
4	WRD	5.7.46 (b)	Supplying and placing bamboo roll each roll of 4 nos uncleared full bamboo 75 mm dia 6 m to 8 m long at site binding properly each other in bunch with annealed wire 20 to 25 SWG at least at three places along its length, 3 nos loads filled with (Brick bats) in empty cement bags and trying it with B.A. wire 8 to 10 SWG launching in river and placing in position and trying the bamboo roll at one end at least 15M away from the river bank to Bamboo post, including piling of bamboo post & royalty etc. and carriage of all materials at site all complete job as per specification and direction of E/I.	0	0	-	-	-	0.00			
				0	0	-	-	-	0.00			
									Total:-	0.00 No.	1118.26	0.00
5	WRD	5.7.47 (a)	Supplying, making and placing in position Tree branches and Jhankhi covering cover over all space of about of 2.832 Cum providing 3 nos. of loads by filling boulder spall in EC bags, trying with 20 to 25 SWG annealed wire to the tree spur and anchoring the same with B.A.wire 8 to 10 SWG to the bamboo post at least 15M away from the river bank including piling of bamboo post & royalty etc. and carriage of all materials at site all complete job as per specification and direction of E/I.	0	0	-	-	-	0.00			
				0	0	-	-	-	0.00			
									Total:-	0.00 No.	1562.35	0.00


Sl. No.	SDB	MORD	Description	No.	No.	Length (M)	Width (M)	Height (M)	Qty.	Unit	Rate (Rs.)	Amount (Rs.)
5	10.01	3002.0	Restoration of Rain Cuts (By Manual Means) Restoration of raincuts with soil, moorum, gravel or a mixture of these, clearing, the loose soil, benching of 300mm width, laying fresh material in layers not exceeding 250mm and compacting with plate compactor or power rammers to restore the original alignment, level and slopes.	0	0	0.00	0.00	0.00	0.00			
				0	0	0.00	0.00	0.00	0.00			
								Total:-	0.00	Cum	378.68	0.00
6	9.2 (i)	1100 & 800	Sand filling or Type B (First class) bedding Filling and spreading local sand over brick bats as per drawing and technical specification Clause 305.3.9	1	1	30.00	5.00	0.25	37.50			
				1	1	30.00	5.00	0.30	45.00			
			Ditch	1	1	30.00	5.00	0.35	52.50			
				1	1	30.00	5.00	0.25	37.50			
				1	1	8.00	7.00	0.33	18.20			
								Total:-	190.70	Cum	514.43	98102.00
7	WRD	5.7.40	Brick bats Providing laying and spreading brick bats in Road ditches all complete as per approved design, specifications and direction of E/I	1	1	30.00	5.00	0.70	105.00			
				1	1	30.00	5.00	1.20	180.00			
			Ditch	1	1	30.00	5.00	0.85	127.50			
				1	1	30.00	5.00	0.70	105.00			
				1	1	8.00	6.00	0.75	36.00			
						Total:-	128.00		553.50	Cum	2168.72	1200387.00
8			RCC Pipe NP3 as per design in Single Row (1000mm Dia.) Providing and laying reinforced cement concrete pipe NP3 for culverts on first class bedding of granular material in single row including fixing collar with cement mortar 1:2 but excluding excavation, protection works, backfilling, concrete and masonry works in head walls and parapets Clause 1106.	1	2	2.50	-	-	5.00			
			At Ch. 16m	2	2	2.50	-	-	10.00			
								Total:-	15.00	Mtr.	4452.39	66786.00
TOTAL												1365230.00

SEIGNORAGE FEE 10% FOR ROYALTY MATERIAL

LOCAL SAND	190.70	1.20	=	228.84	Cum	141.85	32461.00
BRICK BAT	553.50	1.20	=	664.20	Cum	1,050.00	583672.00
TOTAL MATERIAL COST:-							616133.00
SEIGNORAGE FEE 10%							61613.00


R.W.D
Dighalbank


A.E
R.W.D
Dighalbank


R.W.D
Kishanganj - 2