

कार्यपालक अभियंता का कार्यालय,
ग्रामीण कार्य विभाग, कार्य प्रमण्डल, गोपालगंज-1

पत्रांक:- 2083 इन- / गोपालगंज

दिनांक 24/12/2022

प्रेषक,

कार्यपालक अभियंता,
ग्रामीण कार्य विभाग,
कार्य प्रमण्डल, गोपालगंज-1

सेवा में,

सचिव,
बिहार ग्रामीण पथ विकास अभिकरण,
बिहार, पटना।

विषय:- 3054 बिहार ग्रामीण पथ नई अनुसूचना नीति 2018 के योजना अन्तर्गत में
अधियाचित राशि का आवंटन उपलब्ध कराने के संबंध में।

महाशय,

उपरोक्त विषयक प्रासंगिक पत्र के अनुपालन में 3054 बिहार ग्रामीण पथ नई
अनुसूचना नीति 2018 के योजना अन्तर्गत राशि की मांग संलग्न विहित प्रपत्र में पथवार की
गई है।

अतः भवदीय से अनुरोध है कि विहित प्रपत्र के कॉलम 18 में अंकित कुल राशि
का आवंटन उपलब्ध कराने की कृपा की जाय। अधियाचित राशि के संदर्भ में C & P किये
मापी पुस्तिका एवं Bump Intrigater Report की छाया प्रति संलग्न कर समर्पित किया जा
रहा है।

अनु० यथोक्त।

विश्वासभाजन

(विश्व)
23/12/22

कार्यपालक अभियंता,
ग्रामीण कार्य विभाग,
कार्य प्रमण्डल, गोपालगंज-1

AM
23/12/22

Requisition Format for Scheme Head- MR (3054) Under Bihar Rural Road Maintenance Policy 2018 (Initial Rectification and Surface Renewal)

SL No	Package No.	Name of Road	Project ID as per MIS	Administrative Approval (AA) Letter No. & Date	Administrative Approval (AA)		Agreement Amount (In Lakh)		Agreement No. & Date	Date of Completion as per Agreement	Actual Date of Completion	Value of IRI (in mm/km)	Thickness of Bitumen Layer (in mm)	Value of Bitumen Content in Percentage	Previous Total Allocated Amount (in Lakh)	up-to-date expenditure as per MIS (in Lakh)	Requisition work done (in lakh)	Remarks
					Length (in Km)	Amount of (in Lakh)	Initial Rectification with Surface Renewal (in Lakh)	5 Years Routine Maintenance (in Lakh)										
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19
1	MR-N/19-20 Gopalganj-1/16	Malahi to Gopalganj	31406902071	724 dt. 12.02.2020	9.150	711.976	556.55412	97.05448	46-MBD- NNP- 2020/21/ dt 24.09.2020	24.09.2020	02.12.2022	Good	25	5.015%	510.15301	510.15301	18.96304	Completed

प्रमाणित किया जाता है कि यह नये कार्य के सभी अवरदावर 100 प्रतिशत कार्य का दर्ज मापी का सत्यापन संबन्धित कर्मीय अनियंता 50 प्रतिशत मापी का सत्यापन संबन्धित सहायक अनियंता एवं 10 प्रतिशत मापी का सत्यापन अग्रोहस्ताक्षरी यथा कार्यमातक क्रियेयता द्वारा किया जा चुका है। कलवा सभा कार्य मातक एवं विशिष्टी के अनुरूप है।

1. Signed Hand Copy and Soft Copy (in excel) of recorded IRI is enclosed
2. Up-to-date Progress Progress has been uploaded in MIS

D.A.O.
R.W.D. Works Division
Gopalganj-1

Wish
23/12/22
Executive Engineer
R.W.D. Works Division
Gopalganj-1
23/12/22

FORM CER 19
(See government of India's Decision) Below Rule-150
Form of utilisation certificate up to Month of Nov. 2022
Rural Road Maintenance Policy 2018


Sl No.	Name of Scheme	Allotment Received		Expenditure		Balance	
1	Rural Road Maintenance Policy 2018	By Bank A/C	0.00	By Bank A/C	0.00	In Bank A/C	0.00
		By CFMS	506986662.00	By CFMS	503909946.00	In CFMS	3076716.00
		Total	506986662.00	Total	503909946.00	Total	3076716.00
						Certified that sum of Rs. 503909946.00 of has been utilized for the purpose of Rural Road Maintenance Policy 2018 as given in the margin for which it was sanction as that the balance of Rs.3076716.00 remaining unutilized at the end of the	

2. Certified that I have satisfied my self the condition in which the grants aid was sanctioned have been duly full filled are beign fulfilled and that have exercised the following checks to see that the kind of checks exercised:-

- Work have been supervised by executive engineer/Super intending Engineer..... Yes
- Periodical inspection has been conducted by E.E./S.E/E.E. Weekly S.E. quarterly
- Construction materials have been tested-Yes
- Measurement have been recorded in MB as test Check Conducted by Assistant Engineer/ Executive
- All other coda formalities have been observed- Yes

- 3 Physical Progress achieved:-
- Construction of Road work 11 Nos.
 - Construction of CD work 77/2 Nos (77HP CUI/2 No RCC)


 Divisional Accounts Officer
 R.W.D. Works Division
 Gopalganj-1


 Executive Engineer,
 R.W.D. Works Division
 Gopalganj-1

1st On Acc Bill.

1

Name of Work-
 Situation of Work-
 Agency by which work is executed-
 Date of Measurement-
 No. and date of agreement

(These four lines should be repeated at the commencement of the measurement relating to each work)

Particulars	Details of actual measurement				Contents of area
	No.	L	B.	D.	
<u>Name of Work:- Construction of</u>					
<u>road & C.D Works from</u>					
<u>Mabhi to Gopalpur.</u>					
<u>Under N.M.P. - 2018.</u>					
<u>Agency:- Sri Nimal Babad Engineers</u>					
<u>& management Pvt Ltd.</u>					
<u>Agreement No-46/MBD-NMP-2018/2020-21</u>					
<u>Agreement Value (C) Rs 5,56,554.2=00</u>					
<u>(M) Rs 97,05,448=00</u>					
<u>Date of Start 24/09/2020</u>					
<u>Date of Completion 23/06/2021</u>					
<u>Date of measurement - 23/03/2021</u>					

RECORD MEASUREMENT:-

<u>①</u>					
<u>Cleaning & grubbing</u>					
<u>road land - do -</u>					
<u>- do as per E.P.</u>					
<u>16x30.00 x 2x1.00 = 960.00m²</u>					
<u>30x30.00 x 2x1.00 = 1800.00m²</u>					
<u>30x30.00 x 2x1.00 = 1800.00m²</u>					
<u>29x30.00 x 2x1.00 = 1740.00m²</u>					
<u>30x30.00 x 2x1.00 = 1800.00m²</u>					
<u>30x30.00 x 2x1.00 = 1800.00m²</u>					
<u>30x30.00 x 2x1.00 = 1800.00m²</u>					
<u>Continuation 11700.00m²</u>					

ABSTRACT OF COST:-

39

Sch. XLV-Form No. 134


Particulars	Details of actual measurement				Contents of area
	No.	L.	B.	D.	
① Cleaning & grubbing road land by manual — do — do as per E/R					
Qty Vide TMB P- 279 Hm1 1.64 Hm @ Rs 51,133.76/Hm					Rs 83,859=00
② 3 Construction of subgrade & earthen Shoulder — do — do as per E/R					
Qty Vide TMB P- 279 Hm2 P- 279 Hm3				5748.00 m ³ 1620.00 m ³	
@ Rs 204.16/m ³				7368.00 m ³	Rs 1,50,4251=00
③ 4 Construction of G.S.B gr II by providing well graded material — do — do as per E/R					
Qty Vide TMB P- 279 Hm3 155.63 m ³ @ Rs 2439.43/m ³					Rs 3,79,648=00
④ 5 W.B.M gr II - Providing laying spreading & Compacting Stone aggregates — do — do as per E/R					
Qty Vide TMB P- 289 Hm4 236.02 m ³ @ Rs 4535.45/m ³					Rs 1,07,06,90=00 Rs 10,70,802=00 CO Rs 303,856=00 303,8378=

Particulars	Details of actual measurement				Contents of area
	No.	L.	B.	D.	
(33) 34	Providing integral				
	in RCC abutment &				
	wing wall				
	as per E/P				
Qty Vide TM B P-34	91m	2.8			
18.0 Nos @ Rs 90.44 each					Rs 43,41=0
(34) 35	Providing & laying				
	boulder 100mm for				
	bed protection				
	as per E/P				
Qty Vide TM B P-35	79m	2			
52.92m ³ @ Rs 4,150.36/m ³					Rs 2,19,637=00
(35) 36	Supplying fitting &				
	placing HYSD bar				
	reinforcement.				
Qty Vide TM B P-36	91m	29			
2.915m T @ Rs 54053.96/MT					Rs 1,57,567=00
					4,74,52,173=00
					Rs 4,74,52,355=00
(36) 40	Add Labour 1%				Rs 4,74,52,355=00
(37) 41	Add GST 12%				56,94,283=00
(38) 42	Add S.F.				42,56,27=00
					Rs 54,46,582=00
					54,46,582=00
					Rs 11,35,001=00
					52,11,605=00
					Rs 11,34,978=00
					Rs 51,01,530=00
					Rs 18,96,304=00
					Rs 18,97,357=00
Vide TM B P-35					

Continuation

21/12/22
JE5/12/22
AE23/12/22
Mo

Name of Customer: SRI NIVASH PRASAD ENGICONS AND MANAGEMENT PRIVATE LIMITED, Machine no: 19103, Road: Malahalli se Gopalpur, Date: 15/10/22, Section No: 39, Equation: $Y=0.936X+245.3$

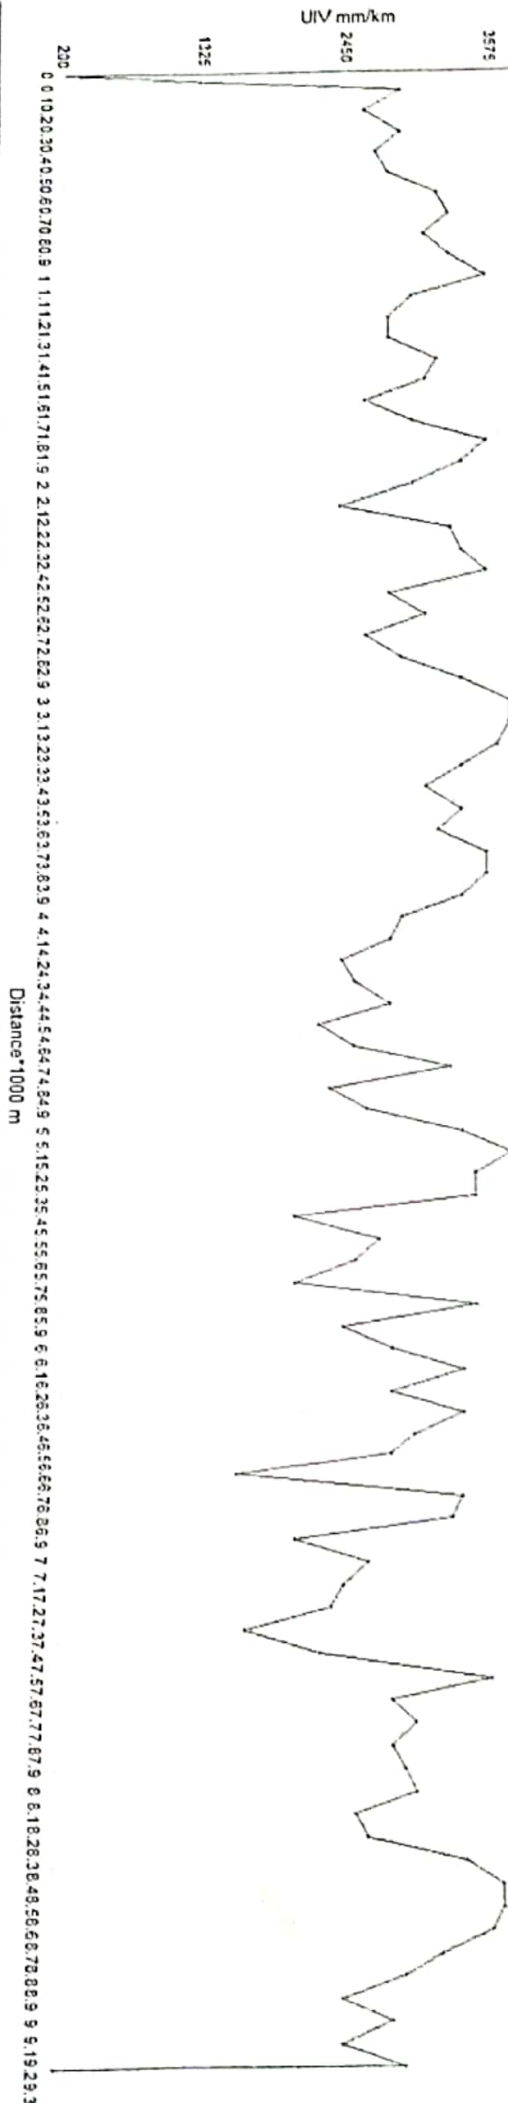

[Signature]
16/10/22
JE

[Signature]
16/10/22

[Signature]
22/10/22
ER

Name of work : Malahi se Gopalpur

Name of customer : SRI NIVASH PRASAD ENGICONS AND MANAGEMENT
PRIVATE LIMITED

(R) Rural Road

(R)Rural Road																
Good					Average					Poor						
< 4000					4001 - 5000					> 5000						
Date	Time	Test No	Distance(m)	Total Distance(m)	BUMPI(cm)	Speed(Km/Hr)	Ultram(Km)	Corrected LI (mm/Km)	IRI	Status	Latitude	Direction	Longitude	Direction1	Remarks	
15/10/22	08:57:24	39	0	0	0.0 cm	0.0 Km/Hr	0.0 mm/Km	245	0.43	Good	0.0000009		0.0000009		Normal	
15/10/22	08:58:53	39	100	100	28.0 cm	8.1 Km/Hr	2800.0 mm/Km	2866	3.87	Good	26.5242815	N	84.3288736	E	Normal	
15/10/22	08:59:10	39	100	200	25.0 cm	19.8 Km/Hr	2500.0 mm/Km	2585	3.53	Good	26.5242815	N	84.3288736	E	Normal	
15/10/22	08:59:27	39	100	300	28.0 cm	21.6 Km/Hr	2800.0 mm/Km	2866	3.87	Good	26.5253057	N	84.3270502	E	Normal	
15/10/22	09:00:56	39	100	400	26.0 cm	24.0 Km/Hr	2600.0 mm/Km	2679	3.64	Good	26.5250540	N	84.3262166	E	Normal	
15/10/22	09:01:18	39	100	500	27.0 cm	16.6 Km/Hr	2700.0 mm/Km	2773	3.75	Good	26.5242357	N	84.3256845	E	Normal	
15/10/22	09:01:53	39	100	600	31.0 cm	10.2 Km/Hr	3100.0 mm/Km	3147	4.2	Good	26.5234556	N	84.3252288	E	Normal	
15/10/22	09:02:30	39	100	700	32.0 cm	9.7 Km/Hr	3200.0 mm/Km	3241	4.32	Good	26.5227308	N	84.3249063	E	Normal	
15/10/22	09:02:54	39	100	800	30.0 cm	15.4 Km/Hr	3000.0 mm/Km	3053	4.09	Good	26.5223436	N	84.3247766	E	Normal	
15/10/22	09:03:16	39	100	900	32.0 cm	15.0 Km/Hr	3200.0 mm/Km	3241	4.32	Good	26.5207815	N	84.3246393	E	Normal	
15/10/22	09:03:40	39	100	1000	35.0 cm	14.8 Km/Hr	3500.0 mm/Km	3521	4.65	Good	26.5199423	N	84.3246088	E	Normal	
15/10/22	09:03:57	39	100	1100	29.0 cm	21.6 Km/Hr	2900.0 mm/Km	2960	3.98	Good	26.5193567	N	84.3247080	E	Normal	
15/10/22	09:04:10	39	100	1200	27.0 cm	27.0 Km/Hr	2700.0 mm/Km	2773	3.75	Good	26.5185804	N	84.3245096	E	Normal	
15/10/22	09:04:22	39	100	1300	27.0 cm	30.6 Km/Hr	2700.0 mm/Km	2773	3.75	Good	26.5175428	N	84.3242350	E	Normal	
15/10/22	09:04:35	39	100	1400	31.0 cm	27.2 Km/Hr	3100.0 mm/Km	3147	4.2	Good	26.5164804	N	84.3239908	E	Normal	
15/10/22	09:04:52	39	100	1500	30.0 cm	21.3 Km/Hr	3000.0 mm/Km	3053	4.09	Good	26.5162191	N	84.3247538	E	Normal	
15/10/22	09:05:05	39	100	1600	25.0 cm	26.4 Km/Hr	2500.0 mm/Km	2585	3.53	Good	26.5155210	N	84.3248072	E	Normal	
15/10/22	09:05:19	39	100	1700	29.0 cm	26.7 Km/Hr	2900.0 mm/Km	2960	3.98	Good	26.5145521	N	84.3246988	E	Normal	
15/10/22	09:05:36	39	100	1800	35.0 cm	21.1 Km/Hr	3500.0 mm/Km	3521	4.65	Good	26.5136118	N	84.3247766	E	Normal	
15/10/22	09:05:50	39	100	1900	33.0 cm	25.2 Km/Hr	3300.0 mm/Km	3334	4.43	Good	26.5134897	N	84.3254404	E	Normal	
15/10/22	09:06:04	39	100	2000	29.0 cm	26.4 Km/Hr	2900.0 mm/Km	2960	3.98	Good	26.5134897	N	84.3254404	E	Normal	

B. K. S. S.
16/10/22

10000/1/22
16/10/22

Rudhys
22/10/22

Name of work		: Malahi se Gopalpur													
Name of customer :		SRI NIVASH PRASAD ENGICONS AND MANAGEMENT PRIVATE LIMITED													
(R)Rural Road															
Good		Average						Poor							
< 4000		4001 - 5000						> 5000							
15/10/22	09-06-17	39	100	2100	23.0 cm	27.2 Km/Hr	2300.0 mm/Km	2398	3.3	Good	26.5131197	N	84.3277674	E	Normal
15/10/22	09-06-33	39	100	2200	32.0 cm	22.5 Km/Hr	3200.0 mm/Km	3241	4.32	Good	26.5130129	N	84.3287287	E	Normal
15/10/22	09-06-47	39	100	2300	33.0 cm	24.9 Km/Hr	3300.0 mm/Km	3334	4.43	Good	26.5121260	N	84.3288736	E	Normal
15/10/22	09-07-02	39	100	2400	35.0 cm	25.4 Km/Hr	3500.0 mm/Km	3521	4.65	Good	26.5113459	N	84.3293924	E	Normal
15/10/22	09-07-17	39	100	2500	27.0 cm	22.7 Km/Hr	2700.0 mm/Km	2773	3.75	Good	26.5105391	N	84.3296366	E	Normal
15/10/22	09-07-31	39	100	2600	30.0 cm	25.9 Km/Hr	3000.0 mm/Km	3053	4.09	Good	26.5104494	N	84.3285151	E	Normal
15/10/22	09-07-46	39	100	2700	25.0 cm	24.6 Km/Hr	2500.0 mm/Km	2585	3.53	Good	26.5104589	N	84.3282862	E	Normal
15/10/22	09-08-00	39	100	2800	28.0 cm	24.6 Km/Hr	2800.0 mm/Km	2866	3.87	Good	26.5096560	N	84.3270807	E	Normal
15/10/22	09-08-12	39	100	2900	33.0 cm	29.4 Km/Hr	3300.0 mm/Km	3334	4.43	Good	26.5089797	N	84.3265924	E	Normal
15/10/22	09-08-24	39	100	3000	37.0 cm	31.8 Km/Hr	3700.0 mm/Km	3709	4.87	Good	26.5079889	N	84.3261423	E	Normal
15/10/22	09-08-37	39	100	3100	37.0 cm	26.7 Km/Hr	3700.0 mm/Km	3709	4.87	Good	26.5071211	N	84.3259745	E	Normal
15/10/22	09-09-01	39	100	3200	36.0 cm	16.3 Km/Hr	3600.0 mm/Km	3615	4.76	Good	26.5062151	N	84.3261042	E	Normal
15/10/22	09-09-18	39	100	3300	33.0 cm	18.6 Km/Hr	3300.0 mm/Km	3334	4.43	Good	26.5055113	N	84.3257685	E	Normal
15/10/22	09-09-35	39	100	3400	30.0 cm	21.8 Km/Hr	3000.0 mm/Km	3053	4.09	Good	26.5045958	N	84.3252954	E	Normal
15/10/22	09-09-56	39	100	3500	33.0 cm	16.3 Km/Hr	3300.0 mm/Km	3334	4.43	Good	26.5037603	N	84.3249979	E	Normal
15/10/22	09-10-11	39	100	3600	31.0 cm	24.5 Km/Hr	3100.0 mm/Km	3147	4.2	Good	26.5028086	N	84.3249674	E	Normal
15/10/22	09-10-26	39	100	3700	35.0 cm	24.1 Km/Hr	3500.0 mm/Km	3521	4.65	Good	26.5020933	N	84.3249063	E	Normal
15/10/22	09-10-29	39	100	3800	35.0 cm	27.2 Km/Hr	3500.0 mm/Km	3521	4.65	Good	26.5012885	N	84.3248529	E	Normal
15/10/22	09-10-51	39	100	3900	33.0 cm	28.8 Km/Hr	3300.0 mm/Km	3334	4.43	Good	26.5001917	N	84.3246393	E	Normal
15/10/22	09-11-09	39	100	4000	28.0 cm	20.7 Km/Hr	2800.0 mm/Km	2866	3.87	Good	26.4996881	N	84.3244486	E	Normal
15/10/22	09-11-23	39	100	4100	27.0 cm	25.2 Km/Hr	2700.0 mm/Km	2773	3.75	Good	26.5003462	N	84.3233118	E	Normal
15/10/22	09-11-36	39	100	4200	23.0 cm	27.3 Km/Hr	2300.0 mm/Km	2398	3.3	Good	26.5011721	N	84.3226252	E	Normal

16/10/22
JE

26/10/22
26/10/22

Pushor
22/10/22

Name of customer :	SRI NIVASH PRASAD ENGICONS AND MANAGEMENT PRIVATE LIMITED
--------------------	---

Poor

			< 4000		4001 - 5000		> 5000						
15/10/22	09-11:50	39	100	4300	24.0 cm	25.9 Km/Hr	2400.0 mm/Km	2492	3.41	Good	N	E	Normal
15/10/22	09-12:03	39	100	4400	27.0 cm	28.0 Km/Hr	2700.0 mm/Km	2773	3.75	Good	N	E	Normal
15/10/22	09-12:14	39	100	4500	21.0 cm	30.9 Km/Hr	2100.0 mm/Km	2211	3.07	Good	N	E	Normal
15/10/22	09-12:28	39	100	4600	24.0 cm	26.4 Km/Hr	2400.0 mm/Km	2492	3.41	Good	N	E	Normal
15/10/22	09-12:43	39	100	4700	32.0 cm	24.3 Km/Hr	3200.0 mm/Km	3241	4.32	Good	N	E	Normal
15/10/22	09-12:56	39	100	4800	22.0 cm	27.3 Km/Hr	2200.0 mm/Km	2305	3.18	Good	N	E	Normal
15/10/22	09-13:10	39	100	4900	25.0 cm	28.4 Km/Hr	2500.0 mm/Km	2585	3.53	Good	N	E	Normal
15/10/22	09-13:24	39	100	5000	33.0 cm	25.4 Km/Hr	3300.0 mm/Km	3334	4.43	Good	N	E	Normal
15/10/22	09-13:38	39	100	5100	37.0 cm	26.2 Km/Hr	3700.0 mm/Km	3709	4.87	Good	N	E	Normal
15/10/22	09-13:55	39	100	5200	34.0 cm	22.9 Km/Hr	3400.0 mm/Km	3428	4.54	Good	N	E	Normal
15/10/22	09-14:13	39	100	5300	34.0 cm	18.5 Km/Hr	3400.0 mm/Km	3428	4.54	Good	N	E	Normal
15/10/22	09-14:28	39	100	5400	19.0 cm	23.9 Km/Hr	1900.0 mm/Km	2024	2.83	Good	N	E	Normal
15/10/22	09-14:43	39	100	5500	26.0 cm	24.9 Km/Hr	2600.0 mm/Km	2679	3.64	Good	N	E	Normal
15/10/22	09-14:57	39	100	5600	24.0 cm	25.2 Km/Hr	2400.0 mm/Km	2492	3.41	Good	N	E	Normal
15/10/22	09-15:10	39	100	5700	19.0 cm	28.1 Km/Hr	1900.0 mm/Km	2024	2.83	Good	N	E	Normal
15/10/22	09-15:25	39	100	5800	34.0 cm	25.2 Km/Hr	3400.0 mm/Km	3428	4.54	Good	N	E	Normal
15/10/22	09-15:42	39	100	5900	23.0 cm	20.7 Km/Hr	2300.0 mm/Km	2298	3.3	Good	N	E	Normal
15/10/22	09-15:59	39	100	6000	27.0 cm	21.6 Km/Hr	2700.0 mm/Km	2773	3.75	Good	N	E	Normal
15/10/22	09-16:13	39	100	6100	33.0 cm	25.7 Km/Hr	3300.0 mm/Km	3334	4.43	Good	N	E	Normal
15/10/22	09-16:27	39	100	6200	27.0 cm	26.2 Km/Hr	2700.0 mm/Km	2773	3.75	Good	N	E	Normal
15/10/22	09-16:44	39	100	6300	33.0 cm	21.3 Km/Hr	3300.0 mm/Km	3334	4.43	Good	N	E	Normal
15/10/22	09-17:00	39	100	6400	29.0 cm	22.0 Km/Hr	2900.0 mm/Km	2960	3.98	Good	N	E	Normal

Quibus
22/10/22
ER

Name of work		: Malah se Gopalpur													
Name of customer		: SRI NIVASH PRASAD ENGICONS AND MANAGEMENT PRIVATE LIMITED													
(R) Rural Road															
Good			Average					Poor							
< 4000			4001 - 5000					> 5000							
15/10/22	08/17/26	39	100	6500	27.0 cm	14.7 Km/Hr	2700.0 mm/Km	2773	3.75	Good	26.5106173	N	84.3067408	E	Normal
15/10/22	08/17/47	39	100	6600	14.0 cm	16.0 Km/Hr	1400.0 mm/Km	1556	2.24	Good	26.5097589	N	84.3068974	E	Normal
15/10/22	08/18/02	39	100	6700	33.0 cm	23.4 Km/Hr	3300.0 mm/Km	3334	4.43	Good	26.5090780	N	84.3064966	E	Normal
15/10/22	08/18/16	39	100	6800	32.0 cm	26.2 Km/Hr	3200.0 mm/Km	3241	4.32	Good	26.5079279	N	84.3061533	E	Normal
15/10/22	08/18/27	39	100	6900	19.0 cm	31.5 Km/Hr	1900.0 mm/Km	2024	2.83	Good	26.5069914	N	84.3068939	E	Normal
15/10/22	08/18/41	39	100	7000	26.0 cm	27.6 Km/Hr	2600.0 mm/Km	2585	3.53	Good	26.5062151	N	84.3060235	E	Normal
15/10/22	08/18/53	39	100	7100	23.0 cm	28.8 Km/Hr	2300.0 mm/Km	2388	3.3	Good	26.5056562	N	84.3069010	E	Normal
15/10/22	08/19/03	39	100	7200	22.0 cm	26.6 Km/Hr	2200.0 mm/Km	2205	3.18	Good	26.5053806	N	84.3077478	E	Normal
15/10/22	08/19/13	39	100	7300	15.0 cm	33.5 Km/Hr	1500.0 mm/Km	1649	2.36	Good	26.5049086	N	84.3080083	E	Normal
15/10/22	08/19/26	39	100	7400	21.0 cm	29.1 Km/Hr	2100.0 mm/Km	2211	3.07	Good	26.5045423	N	84.3097010	E	Normal
15/10/22	08/19/34	39	100	7500	35.0 cm	24.9 Km/Hr	3500.0 mm/Km	3521	4.65	Good	26.5041113	N	84.3105631	E	Normal
15/10/22	08/20/09	39	100	7600	27.0 cm	27.0 Km/Hr	2700.0 mm/Km	2773	3.75	Good	26.5034800	N	84.3102732	E	Normal
15/10/22	08/20/22	39	100	7700	29.0 cm	23.6 Km/Hr	2900.0 mm/Km	2950	3.58	Good	26.5032358	N	84.3093424	E	Normal
15/10/22	08/20/34	39	100	7800	27.0 cm	26.4 Km/Hr	2700.0 mm/Km	2773	3.75	Good	26.5026617	N	84.3088236	E	Normal
15/10/22	08/20/50	39	100	7900	28.0 cm	31.5 Km/Hr	2800.0 mm/Km	2866	3.87	Good	26.5017176	N	84.3085100	E	Normal
15/10/22	08/21/04	39	100	8000	29.0 cm	22.0 Km/Hr	2900.0 mm/Km	2960	3.98	Good	26.5009451	N	84.3081903	E	Normal
15/10/22	08/21/26	39	100	8100	24.0 cm	27.2 Km/Hr	2400.0 mm/Km	2492	3.41	Good	26.5001516	N	84.3078470	E	Normal
15/10/22	08/21/51	39	100	8200	25.0 cm	15.1 Km/Hr	2500.0 mm/Km	2585	3.53	Good	26.4995413	N	84.3072596	E	Normal
15/10/22	08/22/16	39	100	8300	33.0 cm	15.3 Km/Hr	3300.0 mm/Km	3334	4.43	Good	26.4992113	N	84.3063288	E	Normal
15/10/22	08/22/34	39	100	8400	36.0 cm	13.6 Km/Hr	3600.0 mm/Km	3615	4.76	Good	26.4986582	N	84.3062220	E	Normal
15/10/22	08/22/43	39	100	8500	36.0 cm	21.6 Km/Hr	3600.0 mm/Km	3615	4.76	Good	26.4974298	N	84.3060236	E	Normal
15/10/22	08/23/43	39	100	8600	35.0 cm	5.0 Km/Hr	3500.0 mm/Km	3521	4.65	Good	26.4968443	N	84.3057642	E	Normal

16/10/22

16/10/22

22/10/22

Name of work : Malahi se Gopalpur

Name of customer : SRI NIVASH PRASAD ENGICONS AND MANAGEMENT
PRIVATE LIMITED

(R) Rural Road

(R)Rural Road															
Good					Average					Poor					
< 4000					4001 - 5000					> 5000					
15/10/22	09:24:41	39	100	8700	31.0 cm	6.4 Km/Hr	3100.0 mm/Km	3147	4.2	Good	26.4961882	N	84.3050318	E	Normal
15/10/22	09:25:14	39	100	8800	28.0 cm	10.8 Km/Hr	2800.0 mm/Km	2866	3.87	Good	26.4054767	N	84.3055201	E	Normal
15/10/22	09:25:55	39	100	8900	23.0 cm	8.8 Km/Hr	2300.0 mm/Km	2398	3.3	Good	26.4946244	N	84.3056345	E	Normal
15/10/22	09:26:21	39	100	9000	27.0 cm	13.7 Km/Hr	2700.0 mm/Km	2773	3.75	Good	26.4937181	N	84.3056658	E	Normal
15/10/22	09:27:35	39	100	9100	23.0 cm	4.9 Km/Hr	2300.0 mm/Km	2398	3.3	Good	26.4930025	N	84.3058100	E	Normal
15/10/22	09:28:09	39	100	9200	28.0 cm	11.0 Km/Hr	2800.0 mm/Km	2866	3.87	Good	26.4931574	N	84.3067713	E	Normal
			0	9200				245	0.43	Good					

15/10/22
16/10/22
JE

15/10/22
16/10/22
JE

Yusht
22/10/22