

Office Of The Executive Engineer
Rural Works Department, Works Division, Benipatti, Madhubani.

SUPPLEMENTARY Agreement No:- 103 S.B.D/2021-22 (PART-A)

Name of the Work :- Construction and Maintenance of Road and C.D work for TISI MAIN ROAD TO JAY KUMAR YADAV Under MMGSY (Gen) in Bisfi Block (Tender ID-80172)

Name of the Agency :- Sri Siddharth Shankar Jha, Ward No-58, Jarail. Benipatti, Madhubani, 847223

Agreement Amount

(Construction+GST+L.C) :-

Construction-Rs. 1005672=00

GST(12%)-Rs. 120681=00

L.C(1%)-Rs. 10057=00

Total Agreement Construction Amount with Tax (Construction+GST+L.C)

Rupees.11,36,410=00(Rupees Eleven Lakh Thirty Six Thousand Four Hundred Ten) Only.

.Total Agreement Amount:-

Rupees.-11,36,410=00 (Rupees Eleven Lakh Thirty Six Thousand Four Hundred Ten) Only..

Rate Quoted:-0.07% Below on Schedule Rate.

Total Earnest Money Deposit

(With additional performance security) :- Rs.- 24000000 (P.D)


Date of Start :-

Date of Completion :-

अभिषेक शर्मा
13/7/2021
Executive Engineer
R.W.D. Works Division
Benipatti

Executive Engineer
R.W.D. Works Division
Benipatti

13/7/2021

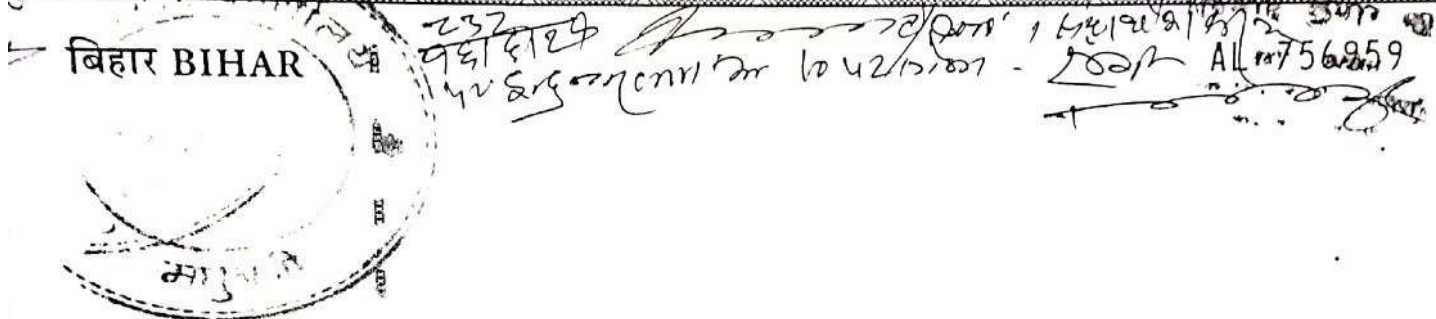

SUPPLEMENTARY AGREEMENT FORM

Agreement

This agreement made the.....Day of.....JULY.....2021, between Executive Engineer, Rural Works Department, Works Division, Benipatti, of the one part, and Sri Siddharth Shankar Jha, Ward No-58, Jarail, Benipatti, Madhubani, 847223 (hereinafter called "the contractor" of the other part)

Whereas the Employer is desirous that the Contractor execute Construction and Maintenance of Road and C.D work for TISI MAIN ROAD TO JAY KUMAR YADAV Under MMGSY (Gen) in Bisfi Block (Tender ID-80172) And the Employer has accepted the Bid by the Contractor for the Execution and completion of such works and the remedying of the any defects therein at cost of Rupees.-11,36,410=00 (Rupees Eleven Lakh Thirty Six Thousand Four Hundred Ten) Only.

TISI MAIN ROAD TO JAY KUMAR YADAV
Under MMGSY (Gen) in Bisfi Block (Tender ID-
80172)

Length in Km 1.095

Executive Engineer
R.W.D. Works Division
Benipatti
13/7/2021

NOW THIS AGREEMENT WITNESSETHas follows:-

1. In this agreement, works and expressions shall have same meanings as are respectively assigned to them in the conditions of contract hereinafter to, and they shall be deemed to form and be read and construed as part of this Agreement.
2. In this Agreement of the payment to be made by the employer to the contractor as hereinafter mentioned the works and remedy any defects therein in all aspects with the provisions of the contract.
3. The Employer hereby covenants to pay the contractor in consideration of the execution and completion of the works and remedying the defect wherein the contract price of such as may became payable under the provisions of the contract at the times and in the manner prescribed by the contract.
4. Following documents shall be deemed to form and read and construed as part of this Agreement, viz:
 - (1) Letter of Acceptance
 - (2) Notice of proceed with works.
 - (3) Contractor's Bid
 - (4) Contractor data
 - (5) Special conditions of contract and General Conditions of contract.
 - (6) Specification MORID
 - (7) Drawing
 - (8) Bill of quantities, And
 - (9) Other document listed in the contract data as forming part of the contract

In witness where of the parried there to have this Agreement to be the day and first before written.

The common seal of -----


Executive Engineer
R.W.D. Works Division
Benipatti

Was here unto affixed in the presence of


Signed, Seal and delivered by the said -----




Executive Engineer
R.W.D. Works Division
Benipatti

In the presence of:

Binding Signature of Employer -----

Binding Signature of Contractor -----





R.W.D. Works Division
Benipatti
13/7/2021

REVISED BILL OF QUANTITY (Supplementary)

Name of Work- TISI MAIN ROAD TO JAY KUMAR YADAV UNDER
MMGSY (Gen)

Block:-
District:-
Length:-

Bisfi
Madhubani
1.095 Km

Sl. No	Description of work	No. or Qty.	Unit	Estimated Rate	
				Figure	Words
1	2	3	4	5	6
1	Construction of Embankment with material obtained from borrow pits with a lift upto 1.5 m , transporting to the site spreading , grading to required slope and compacting to meet requirement of Tables 300.1 and 300.2 with a lead upto 1000 m & 100 m as per Technical Specification Clause 301.5 . (Including Royalty & Labour Cess). For 1000 m lead @ 20 %	347.50	Cum	175.11	Rupees One Hundred Seventy Five and Paisa Eleven Only
2	For 100 m lead @ 80%	1390.00	Cum	139.90	Rupees One Hundred Thirty Nine and Paisa Ninety Only

[Handwritten signature]

[Handwritten signature]
Executive Engineer
R.W.D. WORKS DEPT.
Bihar
13/7/2024
13-7-21

0	Description of work	No. or Qty.	Unit	Estimated Rate	
				Figure	Words
	2	3	4	5	6
3	Construction of Subgrade and Earthen Shoulders Construction of subgrade and earthen shoulders with approved material obtained from borrow pits with all lifts and leads, transporting to site, spreading, grading to required slope and compacted to meet requirement of Table 300.2 with lead upto 1000 m & 100 m as per Technical Specification Clause 303.1. (Including Royalty & Labour Cess).	412.5	Cum	176.75	Rupees One Hundred Seventy Six and Paiza Seventy Five Only
4	Granular Sub-base with Well Graded Material (Table 400.1) (By mix in place method) For Grading I Material Construction of granular sub-base by providing well graded material, spreading in uniform layers with tractor mounted grader arrangement on prepared surface, mixing by mix in place method with rotavator at OMC, and compacting with smooth wheel roller to achieve the desired density, complete as per Technical Specification Clause 401.	152.20	Cum	3236.80	Rupees Three Thousand Two Hundred Thirty Six and Paiza Eighty Only.
5	WBM Grading 3 (By Mechanical Means) Providing, laying, spreading and compacting stone aggregates of specific sizes to water bound macadam specification including spreading in uniform thickness, hand packing, rolling with smooth wheel roller 80-100 kN in stages to proper grade and camber, applying and brooming, stone screening to fill-up the interstices of coarse aggregate, watering and compacting to the required density Grading 3 as per Technical Specification Clause 405.	46.28	Cum	4008.97	Rupees Four Thousand Eight and Paiza Ninety Seven Only.
6	Add GST @ 12%	1	Rs	120765.26	Rupees One Lakh Twenty Thousand Seven Hundred Sixty Five and Paiza Twenty Six Only
7	Add L.C. @ 1%	1	Rs	10063.77	Rupees Ten Thosand Sixty Three and Paiza Seventy Seven Only.

[Signature]

[Signature]
13/7/2021

[Signature]
Executive Engineer
R.W.D. Works Division
Benipatti
13-7-21

अधीक्षण अभियन्ता का कार्यालय,
ग्रामीण कार्य विभाग, कार्य अंचल, दरभंगा।

पत्रांक :- 15003/2021

दिनांक :- 03-07-2021

प्रेषक,

ई0 अनिल कुमार
अधीक्षण अभियन्ता,

सेवा में,

कार्यपालक अभियन्ता,
ग्रामीण कार्य विभाग,
कार्य प्रमंडल, बेनीपट्टी।

विषय:-

मुख्यमंत्री ग्राम सड़क योजना अंतर्गत Tisi Main Road to Jay Kumar Yadav पथ का पूरक परिमाण विपत्र अनुमोदन के संबंध में।

प्रसंग:-

मुख्य अभियन्ता-3, ग्रा0का0वि0 पटना के पत्रांक-4521 अनु0, दिनांक-30.06.2021

महाशय,

उपर्युक्त विषयक प्रासंगिक पत्र के संदर्भ में आपके द्वारा पत्रांक-1108 अनु0, दिनांक-03.07.2021 से उपलब्ध कराया गया विषयांकित योजना का पुनरीक्षित तकनीकी स्वीकृति के आधार पर पूरक परिमाण विपत्र अनुमोदित कर मूल प्रति अग्रेत्तर कार्रवाई हेतु संलग्न की जाती है कि:-

मुख्य अभियन्ता-3, ग्रा0का0वि0 पटना के पत्रांक-4521 अनु0, दिनांक-30.06.2021 में निहित निदेशों का अनुपालन अनिवार्य होगा।

क्र0	पथ का नाम	पुनरीक्षित तकनीकी स्वीकृति की राशि (लाख में)	अतिरिक्त मद का अनुमोदित परिमाण विपत्र की राशि
1	Tisi Main Road to Jay Kumar Yadav Road	102.28	11,37,206.00

अनु0:-यथोक्त।

विश्वसिभाजन,

अधीक्षण अभियन्ता,

ग्रामीण कार्य विभाग, कार्य अंचल, दरभंगा।

Executive Engineer
R.W.D. Works Division
Benipatti

विहार सरकार
ग्रामीण कार्य विभाग

पत्रांक--BRRDA(HQ)-MMGSY-118/2021 470783

/पटना,दिनांक- 8-4-21

प्रेषक,

ई० अशोक कुमार मिश्रा,
अभियंता प्रमुख,
ग्रामीण कार्य विभाग, विहार, पटना।

संबंध में,

मुख्य अभियंता-3,
ग्रामीण कार्य विभाग,
विहार, पटना।

विषय: मुख्यमंत्री ग्राम संपर्क योजनान्तर्गत कार्य प्रमंडल, बेनीपट्टी के अधीन 01
(एक) पथ, Tisi Main Road to Jay Kumar Yadav, (Length-1.095) के
पुनरीक्षित परिमाण विपत्र में मदवार बड़े हुए मात्रा की स्वीकृति के संबंध में।

प्रसंग:-आपका पत्रांक-663 अनु० दिनांक 27.01.2021

महाशय

उपर्युक्त विषयक प्रासंगिक पत्र से प्राप्त विषयवस्तु पथ के पुनरीक्षित परिमाण में
मदवार बड़े हुए मात्रा की स्वीकृति पर विभागीय निविदा समिति द्वारा नियत मूल्य पर
कार्यवाही की छायाप्रति नियमानुसार अग्रतर कार्रवाई हेतु सलग्न कर भेजी जा रही है।
अनु०:-निविदा समिति की कार्यवाही की छायाप्रति।

विश्वासभाजन

(अशोक कुमार मिश्रा)

ज्ञापक:- BRRDA(HQ)-MMGSY-118/2021 470783

/पटना दिनांक-

प्रतिलिपि:-अधीक्षक अभियंता ग्रामीण कार्य विभाग कार्य अंचल दखन
कार्यपालक अभियंता ग्रामीण कार्य विभाग कार्य प्रमंडल, बेनीपट्टी को सूचनार्थ एवं आवश्यक
कार्रवाई हेतु प्रेषित।

अभियंता प्रमुख

13/7/2021

Executive Engineer
R.W.D. Works Division

Benipatti
13-7-21

दिनांक 04-04-2021 को सचिव, ग्रामीण कार्य विभाग की अध्यक्षता में सम्पन्न निविदा समिति की बैठक की कार्यवाही।

1 उपस्थिति

- श्री एकलव्य कुमार मल सचिव, ग्रामीण कार्य विभाग, पटना।
- श्री अशोक कुमार मिश्रा, अभियंता प्रमुख, ग्रामीण कार्य विभाग।
- श्री कृष्ण मोहन सिंह, आंतरिक वित्तीय सलाहकार, ग्रामीण कार्य विभाग।
- श्री कमलेश चौधरी, मुख्य अभियंता-3, ग्रामीण कार्य विभाग, पटना।

2 विषय एवं प्रस्ताव

(i) योजना शीर्ष/विपत्र कोड :-

मुख्यमंत्री ग्राम संपर्क योजना (Gen.) शीर्ष 4515-अन्य ग्राम विकास कार्यक्रमों पर पूंजीगत परिव्यय, उप मुख्यशीर्ष-00, लघु शीर्ष-789-अनुसूचित जातियों के लिए विशेष घटक योजना उपशीर्ष-0104, विपत्र कोड--37-4515007890104 है।

(ii) योजना का नाम :-MMGSY (Gen.) ग्रामीण कार्य विभाग, कार्य प्रमण्डल बेनीपट्टी के अधीन Tisi Main Road to Jay Kumar Yadav, Length-1.095 कि.मी. के निर्माण एवं पक्वपथीय अनुरक्षण कार्य हेतु मुख्य अभियंता-3, ग्रामीण कार्य विभाग बिहार, पटना के पत्रांक-663 अनु. दिनांक 27.01.2021 के द्वारा पुनरीक्षित तकनीकी अनुमोदित DPR एवं परिमाण विपत्र विभाग को समर्पित है जिसका विवरणी Table-'A' एवं 'B' में निम्नवत् है :-

Table-A

Sl No.	Division	Block	Name of Road	Length (In km)	Total Population Served	Reason for Revised DPR	As per Administrative Approval (in Lacs)	As Per Revised Estimate (in Lacs)	Percentage increase
1	2	3	4	5	6	7	8	9	10
1	Bemipatti	Must	Tisi Main Road	1.095	625	प्रस्तावित पथ की कुल लम्बाई 1.095 कि.मी. है। इस के अन्तर्गत अनुरक्षण कार्य के लिए पक्वपथीय पथ की लंबाई 2020 में जहाँ अप्रत्याशित बाढ़ के कारण पथ में गिरावट GSB कार्य एवं WBM गड-III कार्य शामिल है।	88.18		

Table-B

Sl. Item No.	Description of Item	As Per Original Estimate				Extra Quantity Required for Construction		As Per Revised Estimate				Variation
		Unit	Qty.	Rate (in Rs.)	Amount (in Rs.)	Qty.	Qty.	Rate	Amount	Qty.	Percentage	
1	2	3	4	5	6	7	8	9	10	11	12	13
1	Construction of Embankment with Material obtained from borrow pits with a lift upto 1.5m transporting to the site spreading, grading to required slope and compacting to meet requirement of Table 300 and 300.2 with a lead upto 1000m & 1000m as per Technical Specifications for road construction & 2017 & 2018	Cum	558.230	175.1100	97752.31	347.50	905.74	175.1100	158413.4	175.1100	17.91%	

Executive Engineer
R.W.D. Works Division
Bemipatti
11.7.21

समिति
द्वारा की
गयी
समीक्षा

- समिति के
द्वारा लिया
गया निर्णय

समीक्षापरान्त कांडिका-2 में वर्णित मुख्यमंत्री ग्राम सड़क योजना (सामान्य) अंतर्गत जय कृष्ण प्रमोदल, बेनीपट्टी के अधीन 01 (एक) अदद योजना, Tisi Main Road to Jay Krunar Yadav, Length-1.095 कि०मी० के निर्माण एवं पंचवर्षीय अनुरक्षण कार्य हेतु कांडिका-2 (विषय एवं प्रस्ताव) के Table-A के स्तम्भ-7 में अंकित तथ्य विवरणी के आलोक में Table-B के स्तम्भ-3 में अंकित 03 (तीन) अदद मद के लिए स्तम्भ-9 में अंकित पुनरीक्षित मात्रा की स्वीकृति प्रदान की जाती है।

(पंकज कुमार पाल)
सरकार के सचिव,
ग्रामीण कार्य विभाग,
बिहार, मुदना।

Executive Engineer
R.W.D. Works Division
21