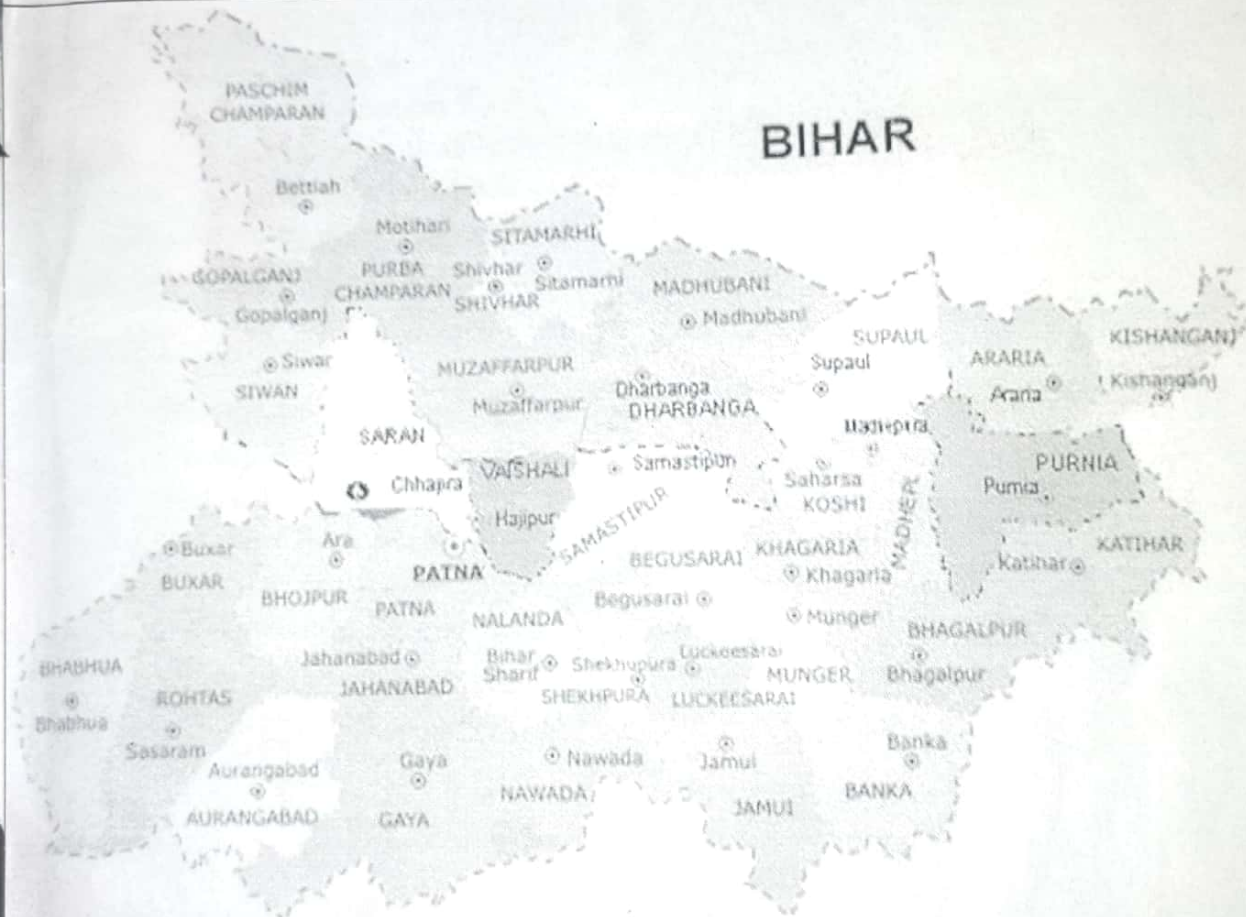




ग्रामीण कार्य विभाग

Rural Works Department, Govt of Bihar

DETAILED PROJECT REPORT FOR FDR



Name of the Road :-

PMGSY Karanpura to Bakarpur

DISTRICT

Vaishali

DIVISION

Mahua

BLOCK

Raja Pakar

TOTAL LENGTH OF ROAD

:

0.750

KM

CONSTRUCTION COST

:

7.808

Lac

Submitted By :-
Executive Engineer
RWD Work Division, Mahua

Inspection Report for Flood Damage Work

Date:- 29/12/2021

1 Name of PIUs :-

2 Name of Block/Road :- Rajabakas/ Karnapura to Bakarpur


(A) For Road:

1. Damage Location/Chainage :- Ch. 0+00 km + 600 m
2. Damage Length :- 400 m
3. Nature of Damage :- Shoulder Damage
4. Details of Restoration Works :-
 - (i) Material being used in Restoration works:- Bitum / Rabi / Bamboo
 - (ii) Equipment's/Tools being used in Restoration works:- Tractor / Roller
 - (iii) Procedure taken up in Restoration works:-
 - (iv) Restored Length :- 400 m


(B) For Bridge:


1. Damage Location/Chainage :-
2. Damage Length :-
3. Nature of Damage :-
4. Details of Restoration Works :-
 - (i) Material being used in Restoration works:-
 - (ii) Equipment's/Tools being used in Restoration works:-
 - (iii) Procedure taken up in Restoration works:-
 - (iv) Restored Length :-

N/A




Signature of JE/AE/EE


29/12/21
AE


29.12.21

आयोजनालय अभियंता
ग्रामीण कार्य विभाग
महाराष्ट्र सरकार, मुंबई


29/12/21

Signature

(Name of Inspection)

प्रतिवेदन

कार्य का नाम:- Karnapura to Bakarpur
..... पथ में अप्रत्याशित बाढ़/अतिवृष्टि से क्षतिग्रस्त पथ में
यातायात चालू करने हेतु आपातकालीन मरम्मत कार्य।

प्रखण्ड- Rajapalgarh
वित्तीय वर्ष - 2021-22
प्राक्कलित राशि - Rs. 7.808 Lakh

प्रस्तुत प्राक्कलन जिसकी प्राक्कलित राशि 7.808 Lakh है, अतिवृष्टि से
बाढ़ प्रखण्ड- राजापालगढ़ में यातायात बहाली हेतु आपातकालिन मरम्मत के
लिए तैयार किया गया है।
अभियंता प्रमुख, ग्रामीण कार्य विभाग, बिहार पटना के पत्रांक 4589 दिनांक 13/11/21 द्वारा
दिये गये निर्देश के आलोक में उक्त पथ के क्षतिग्रस्त पथ में Brick Bats & Local Sand भरकर पथ को चालू
करने का प्रावधान किया गया है। प्राक्कलन वर्तमान चलू अनुसूचित दर पर तैयार किया गया है। इसकी
घटनोत्तर स्वीकृति अपेक्षित है। MIS में प्रतिवेदन दिया जा रहा है (प्रति संलग्न)

अभियंता
कनीय अभियंता

सहायक अभियंता
सहायक अभियंता

29.12.21
कार्यपालक अभियंता
ग्रामीण कार्य विभाग
कार्य प्रमंडल:-

GENERAL ABSTRACT

Name of Road PMGSY Karanpura to Bakarpur
District Vaishali
Block Raja Pakar
Division Mahua
Length of Road (in Km) 0.750 Km

Sl. No.	DESCRIPTION	AMOUNT (LAKHS)
1	Earthwork	0.000
2	Brick Bats	7.234
3	Sand Filling	0.511
4	Sand bag	0.000
5	H.P.	0.063
6	Bamboo piles	0.000
	SUB TOTAL	7.808
	GRAND SUB TOTAL	7.808

Say 7.80 Lacs

9/29/12/21
JE
RWD

29/12/21
AE
RWD

29.12.21
EE
RWD
स्वावलोकन अभियंता
ग्रामीण कार्य विभाग
कार्व प्रमंडल, महुआ

Technically Sanctioned for Rs. 7.80 Lacs (Rs. Seven
lacs eighty thousand) only (provisionally)

10.2.22
Superintending Engineer
Rural Works Department
Work Circle, Muzaffarpur

Sl. No.	SDB SL NO	MORD Ref. No	Description	Unit	QUANTITY	RATE	AMOUNT (in Rs.)
1			Providing and Laying of Brick Bats Providing laying spreading & compacting Brick Bats including spreading in uniform thickness hand packing (Manual Means) As Per Appendix - I	Cum	350.38	2064.56	723380.53
				Total	350.38		
2		11.20	Kill Rabish Filling in foundation trenches as per drawing and technical specification Clause 305.3.9	Cum	54.120	945.11	51149.35
				Total	54.12		
Total Cost :-							774529.88

DETAILED COST ESTIMATE OF HUME PIPE 300mm dia

Sl. No.	SOR Item no. RCD (NH Wing) &	Description	Qty. (Nos.)	Length (m)	Quantity	Unit	Rate (Rs)	Amount in Rs.
1 No.								
Hume Pipe 300mm dia								
1	9.3	Providing and Laying Reinforced Cement Concrete Pipe NP3 300 mm dia as per design in Single Row	3	2.5	7.50	m	834.29	6,257.18
Grand Total for 1 No. of HP Culvert :							6,257.18	