



ग्रामीण कार्य विभाग


Rural Works Department, Govt of Bihar

BIHAR RURAL ROADS PROJECT

Bihar Rural Road Development Agency (BRRDA)

(Temporary restoration)

ESTIMATE FOR MOTORABLE OF ROAD FROM L027-L028 INJOR UNDER FDR AT BLOCK- KALER IN ARWAL DISTRICT

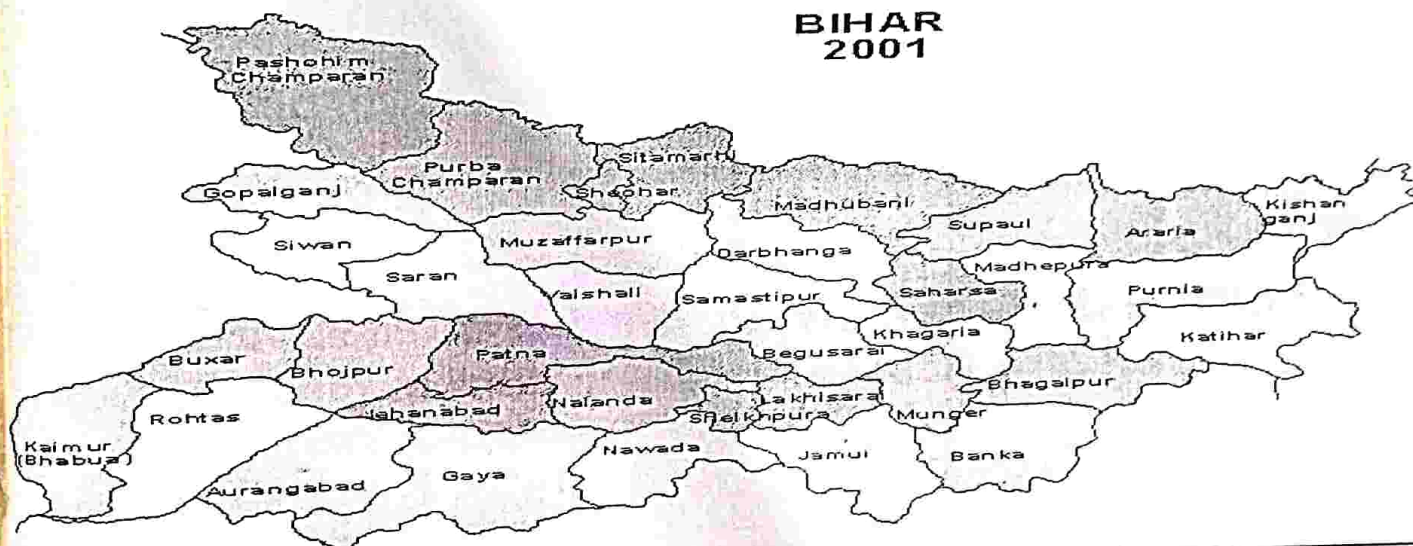

DISTRICT :	ARWAL	BLOCK :	KALER
NAME OF ROAD :	L027-L028 INJOR		
TOTAL CONSTRUCTION COST	:	0.979	Lakhs
TOTAL PROJECT COST (INCLUDING GST & L.C)	:	1.106	Lakhs

SUBMITTED BY:

EXECUTIVE ENGINEER

RWD (w) DIVISION, ARWAL

ARWAL

GENERAL ABSTRACT OF COST FOR MAINTENANCE OF ROAD

NAME OF ROAD :

L027-L028 INJOR

DISTRICT
BLOCK
DIVISION

ARWAL
KALER
ARWAL

Sl. No.	DESCRIPTION	AMOUNT (LAKHS)
PART-A	INITIAL RECTIFICATION INCLUDING SURFACE RENEWAL	
	BRICK BATS	
	SUB TOTAL(A) =	0.978 0.979
	12 % GST (B)	0.117 0.979
	1% LABOUR CESS @	0.010 0.117
	TOTAL COST OF PROJECT (including GST & Labour Cess) IN LACS =	1.105 1.106
<i>[Signature]</i> 18/10/21 JE RWD		<i>[Signature]</i> 08/11/21 AE RWD
		<i>[Signature]</i> 08-11-21 EE RWD

Technically approved for Rs. 1.106 lakh
Rupees one crore Ten lakh
Six thousands 25 hundred only

S.E.
RWD (W) Circle
Aurangabad

Technically approved for Rs. 1.106 lakh
Rupees one crore Ten lakh
Six thousands 25 hundred only

S.E.
RWD (W) Circle
Aurangabad

S.E.
RWD (W) Circle
Aurangabad

$B.f \rightarrow Rs \quad 0.978 \text{ Lacs}$
 $Gr. ST 12\% - 0.117 \quad "$
 $Labour 1\% - 0.010 \quad "$
 $S. fee 10\% - 0.077 \quad "$
Total - 1.182 Lacs

Technically approved for Rs. 1.182 Lakh
 Rupees zero Crore one Lakh
eighteen thousands two hundred only

S.E.
 R.W.D. (M) Circle
 Aurangabad

Technically Sanctioned for Rs. 1.182 Lakh
 Rupees zero Crore one Lakh Eighteen
thousand Two Hundred zero only

Certified copy

Sl. No.	SDB SL.No	MORD RefNo	Description	Unit	NOS	LENGTH	WIDTH	HEIGHT	QUANTITY	RATE	AMOUNT (in Rs.)
			NEW Brick Bats								
			Supplying, Filling, Spreading & Compacting of Brick Bats at work Site								
				Cum	1	10.00	$(4.75+3.75)/2$	1.50	63.750	1508.49	97857.41
				Cum	1	2.00	3.750	0.15 ✓	1.125	1512.87	97890.15
			Total Qty	Cum					64.875	1508.90	97792.5
										1507.85	97857.41
											97890.15
										TOTAL COST OF PAVEMENT IN RS.=	97890.15

18/10/2021
JE
RWD

AE
RWD

8/11/20
EE
RWD
W. 978624
day

TOTAL COST OF PAVEMENT IN RS. =

वाढ क्षतिग्रस्त पथों का अन्तर प्रगंडलीय जाँच प्रतिवेदन हेतु प्रपत्र।

1. निरीक्षी पदाधिकारी का नाम एवं पदनाम :- भुजेश्वर कुमार सिंह
2. निरीक्षण की तिथि :- 25/11/2021
3. पथ का नाम (शीर्ष के साथ) :- L027-L028 INJOR (PMGSY)
4. पथ की लम्बाई :- 3.80 km
5. कार्य प्रगंडल का नाम :- अस्तन
6. प्रखंड का नाम :- फतेर
7. पथ की स्थिति :- (पूर्ण / On going)
8. पथ अनुरक्षण अवधि में है :- (Yes/No) NO
9. क्षतिग्रस्त भाग की लम्बाई :- 12.00 m
10. क्षतिग्रस्त भाग में कराये गये कार्य का विवरण :- 12.00m x 4.25 x 1.65 m
(लम्बाई x चौड़ाई x गहराई)

11. Temporary Restoration में किस-किस सामग्रियों का उपयोग किया गया है, उसका विवरण :- (1.) Brick Bats

12. अभियुक्ति :- Motorable.

निरीक्षी पदाधिकारी का हस्ताक्षर
पदनाम सहित

कार्यपालक अभियंता
ग्रामिण कार्य विभाग
कार्य प्रमण्डल, औरंगाबाद