



ग्रामीण कार्य विभाग

Rural Works Department, Govt of Bihar




BIHAR RURAL ROADS PROJECT

Bihar Rural Road Development Agency (BRRDA)

Govt. of Bihar

FDR (2021-22)

**EMERGENT REPAIR OF ROAD FROM Purna Kasha Pipal CHOUK TO
SITAPUR**

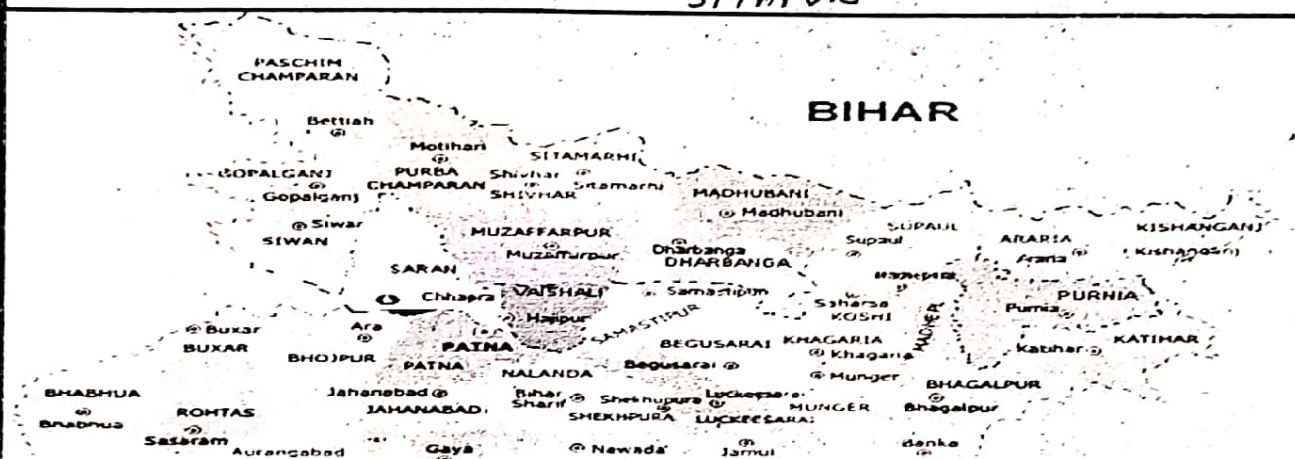

EMERGENT REPAIR OF ROAD FROM Purna Kasha Pipal CHOUK TO SITAPUR in Mokama Block

DISTRICT	:	Patna	
DIVISION	:	BADH	
BLOCK	:	MOKAMA	
TOTAL LENGTH OF ROAD	:	0.100-2.75	KM
TOTAL COST OF CONSTRUCTION	:	7.241	Lac
CONTINGENCY CHARGE @ 1%	:	0.072	Lac
TOTAL COST OF PROJECT	:	7.313	Lac

SUBMITTED BY:-

EXECUTIVE ENGINEER

RWD BADH

Patna

प्रतिवेदन

पथ का नाम	:- मोकामा प्रखंड में पुराना कराहा पीपल चौक से सीतापुर
पथ की आपातकालीन मरम्मत। (एम0एम0जी0एस0वाई)	
क्षतिग्रस्त पथांश की लम्बाई	:- 23.00 मी0
प्राक्कलित राशि	:- 7.313 लाख रुपये
प्रखंड	:- मोकामा
मद	:- एफ0डी0आर0

प्रस्तुत प्राक्कलन मोकामा प्रखण्ड अंतर्गत मोकामा प्रखंड में पुराना कराहा पीपल चौक से सीतापुर पथ की आपातकालीन मरम्मत कार्य हेतु तैयार किया गया है। प्राक्कलन वर्तमान अनुसूचित दर पर तैयार किया गया है।

इस वर्ष बाढ़ से पथ में हो रहे कटाव से पथ को सुरक्षित करने एवं सम्पर्कता बहाल करने हेतु पथ में ईट टुकड़ेका भराव किया गया है। यह पथ एम0एम0जी0एस0वाई द्वारा निर्मित है। पथ के द्वितिय कि0मी0 में कटाव स्थल पर स्थल काफी नीचा है जिससे प्रति वर्ष बाढ़ के पानी का दबाव रहता है। अतः स्थल पर दो आर0सी0सी0 पुलिया 2x6.00x3.00 M का निर्माण अति आवश्यक है। तत्काल दोनों क्षतिग्रस्त स्थल में ब्रिक बेट भर यातायात बहाल कर दिया गया है। जनहित एवं कार्य हेतु के प्राक्कलन की स्वीकृति

Painakh

28.10.21

कनीय अभियंता

ग्रामीण कार्य विभाग

कार्य प्रशाखा मोकामा

अपेक्षित है।

सहायक अभियंता

ग्रामीण कार्य विभाग

कार्य अवर प्रमंडल मोकामा

कार्यपालक अभियंता

ग्रामीण कार्य विभाग

कार्य प्रमंडल बाढ़

उपस्थित :- कार्य की जांच में मल डाए निर्धारित प्रत्येक कार्य प्रमंडल डाए करा ली गयी है। जांच प्रतिवेदन संलग्न है।


Painakh

67-12-21

J.E.

MOKAMA

Sl. No	Name of Block	Name of Road	Damage Location and Size	Status of Restoration			Traffic Status	Remarks
				Work Completed	Work in Progress	Work Yet To Be Started		
7	Ghoswari	NH-82 Gram Jhanki to ishanagar Hote Huye Beldari Chak Road	0.950 To 1.050 Km (100 M)	Work Completed			Traffic is smooth	100 M flank damage, 50 M PCC damage
8	Ghoswari	Prastavit Tartar PMGSY path To to Maruka Weldar	0.100 Km To 0.200 Km & 0.400 Km To 1.300 Km (1000 M)	Work Completed			Traffic is smooth	Flank damage 1.00 Km. Road Crust partially damage 875 M. Traffic restored
9	Pandararak	PWD Sahari Samnera Path To Chakjagmal	0.550 Km - 0.572 Km (22M)	Work Completed			Traffic is smooth	1 RCC Culvert damage 5 M. 22 M Length Road wash out in Flood/Rain Water. Traffic restored
10	Mokama	Naya Kasha To Purana Kasha Janjira Dumra	100 M To 250 M, 1800 M To 1825 M, 2200 M To 2400 M (375 M)	Work Completed			Traffic is smooth	10 M+11 M on two point culvert wash out and 1X15 M road wash out. Now Restored. 2.00 Km Earthen flank damaged. Requir 2 no. RCC culvert of 6 M Span Each & Earthen flank restored.
11	Barh	Khutman Khanda Kona Par To Chandaniya Village	250 M To 400 M, 1300 M To 1500 M (350 M)	Work Completed			Traffic is smooth	150 M PCC Crack, 200 M Flank Damage. Traffic is smooth
12	Athmalgola	Jaiprakash Halt to Barhiya Village	1600 M To 1800 M (200 M)	Work Completed			Traffic is smooth	200 M BT Surface, Gr-III and flank Damage. Traffic is smooth.
13	Mokama	Purna Kasha Pipal Chowk To Sitapur	2100 M To 2200 M (100 M)	Work Completed			Traffic is smooth	10 M+ 12 M on two point road wash out. Traffic Restored. Required 1 X 6 M RCC Culvert


 P. N. Singh
 28.10.21
 J.E.
 28/10/2021
 AB


Sl. No	Name of Block	Name of Road	Damage Location and Size	Status of Restoration			Traffic Status	Remarks
				Work Completed	Work In Progress	Work Yet To Be Started		
7	Ghoswari	NH-82 Gram Jhanki to ishanagar Hote Huye Beldari Chak Road	0.950 To 1.050 Km (100 M)	Work Completed			Traffic is smooth	100 M PCC damage, 50 M PCC damage
8	Ghoswari	Prastavi Tatar PMGSY path To to Maruka Weldar	0.100 Km To 0.200 Km & 0.400 Km To 1.300 Km (1000 M)	Work Completed			Traffic is smooth	1.00 Km. Road Crust age 875 M. Traffic stored
9	Pandarak	PWD Sahari Samera Path To Chakjagnal	0.550 Km - 0.572 Km (22M)	Work Completed			Traffic is smooth	1 R damage 5 M. 22 M ish out in Flood/Rain traffic restored
10	Mokama	Naya Kasha To Purana Kasha Janjira Dumra	100 M To 250 M, 1800 M To 1825 M, 2200 M To 2400 M (375 M)	Work Completed			Traffic is smooth	10 wash No flange culvert. n two point culvert 15 M road wash out. 1.200 Km Earthen Requird 2 no. RCC span Each & Earthen restored.
11	Barh	Khutman Khanda Kona Par To Chandaniya Village	250 M To 400 M, 1300 M To 1500 M (350 M)	Work Completed			Traffic is smooth	150 track, 200 M Flank traffic is smooth
12	Athmalgola	Jaiprakash Halt to Barhiya Village	1600 M To 1800 M (200 M)	Work Completed			Traffic is smooth	200 ace, Gr-III and flank traffic is smooth.
13	Mokama	Puma Kasha Pipal Chowk To Sitapur	2100 M To 2200 M (100 M)	Work Completed			Traffic is smooth	100 M two point road wash stored. Requird 1 X CC Culvert.

28.10.21
J.E.


28/10/2021
A/B



Latitude: 25.380542
 Longitude: 86.045284
 Elevation: 41.84±105 m
 Accuracy: 3.6 m
 Time: 10-08-2021 10:46
 Note: kasha pipal chauk se sitapur

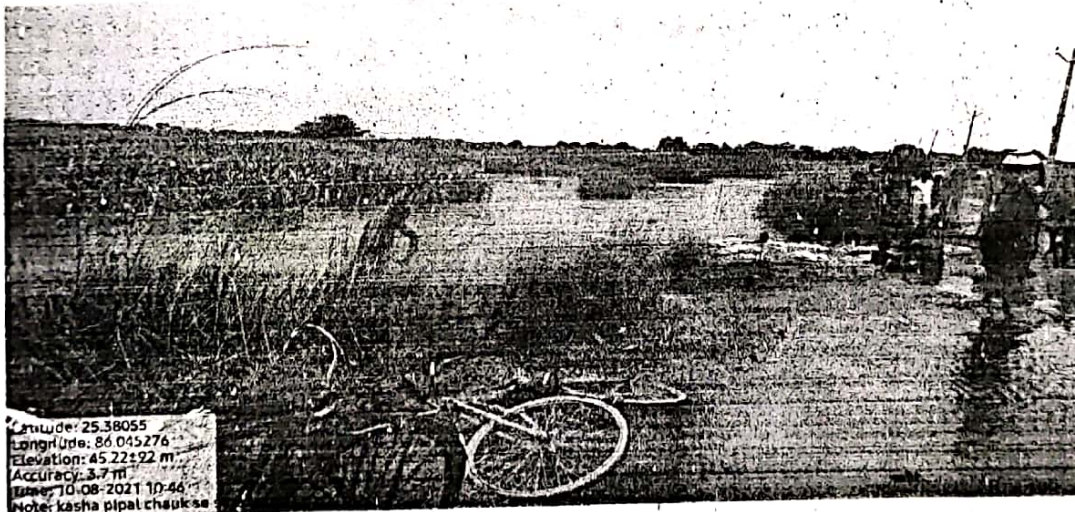

Latitude: 25.38055
 Longitude: 86.045276
 Elevation: 45.22±92 m
 Accuracy: 3.7 m
 Time: 10-08-2021 10:46
 Note: kasha pipal chauk se



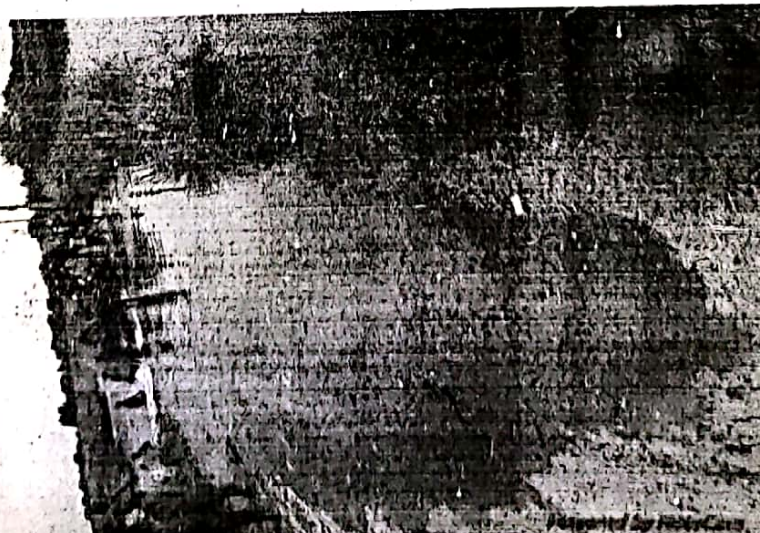


Latitude: 25.380516
 Longitude: 86.045276
 Elevation: 29.04±104 m
 Accuracy: 3.5 m
 Time: 10-08-2021 10:45
 Note: kasha pipal chauk se sitapur

rainak
 28/10/21
 J.K

[Signature]
 28/10/2021
 A.B

[Signature] 28/10/21
 B.C

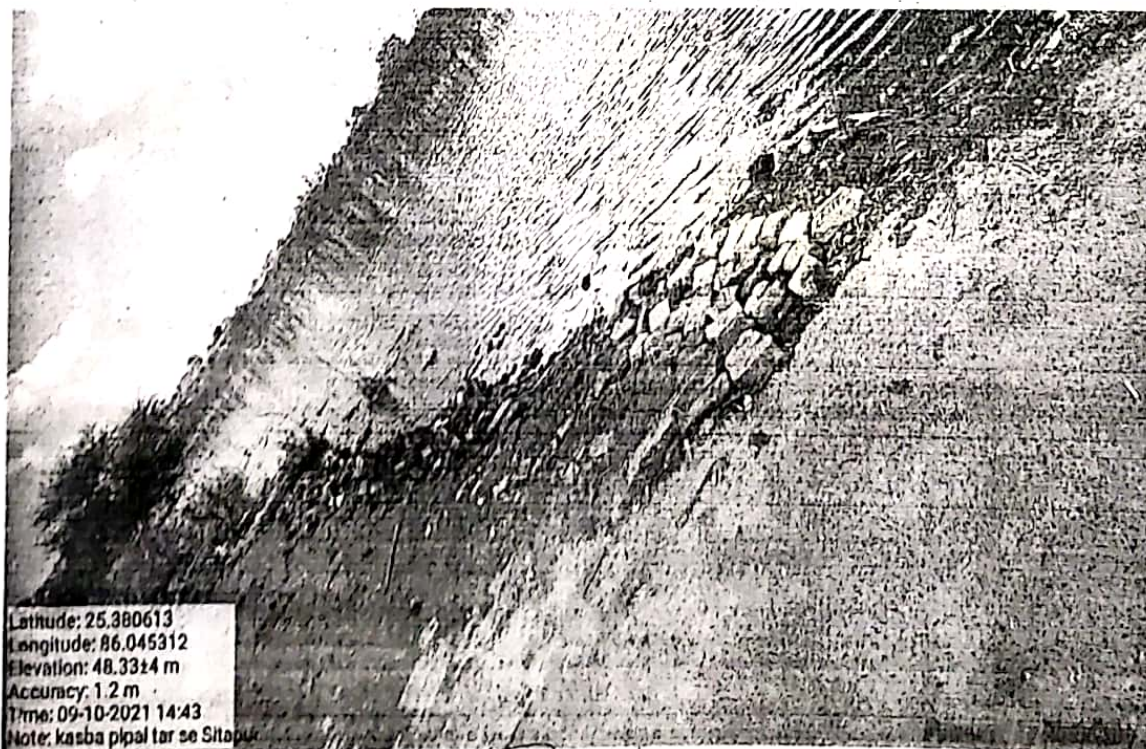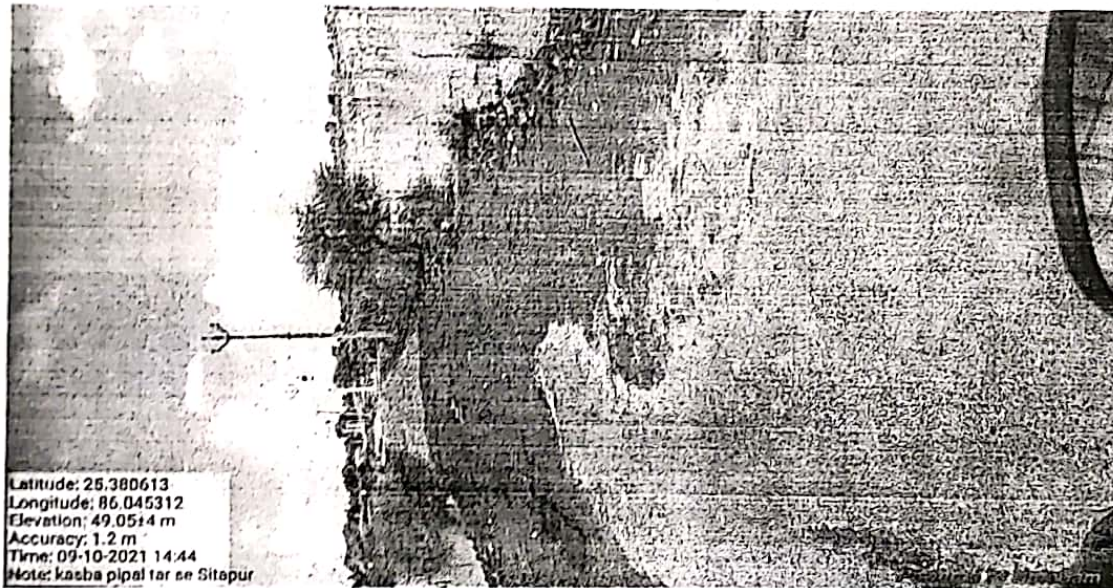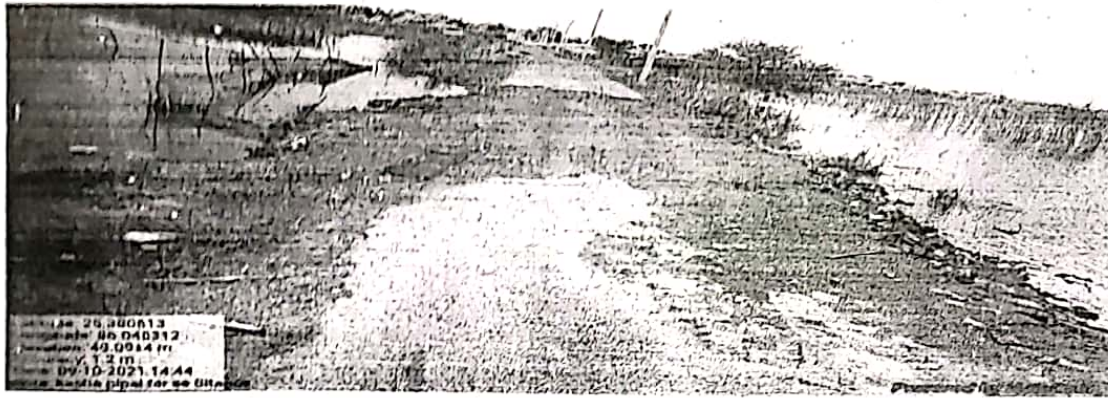

Painach
28.10.21
J.E.

AR
28/10/2021
AR

28/10/21
212

SUMMARY OF COST ESTIMATE FOR THE PROJECT

NAME OF ROAD :

EMERGENT REPAIR OF ROAD FROM Purna Kasha Pipal CHOUK
TO SITAPUR in Mokama Block

District

Patna

BLOCK

MOKAMA

LENGTH OF ROAD (in Km)

0.100 2.75

LENGTH OF BT PAVEMENT

0

LENGTH OF CC PAVEMENT

SL No.	DESCRIPTION	AMOUNT (LAKHS)
	Total Brick Bats	6.207 7.241
	CONTINGENCY @ 1 %	0.072
	TOTAL COST OF PROJECT :-	6.207 7.313

Painam
28.10.21

JE
RWD

[Signature]
28/10/2021

AE
RWD

[Signature]
28/10/21

EE
RWD

Technically sanctioned for Rs. ~~6.207~~ (Rupees ~~Six~~ lakh

~~Twenty thousand three hundred~~

including five year Maintenance Cost

Cancelled copy

Anuman
16/12/2021
Superintending Engineer
R.W.D. WORKS CIRCLE, PATNA

[Signature]
15/12/21

[Signature] *[Signature]*
तथा निष्की सलाहकार Superintending Engineer
ग्रामीण कार्य विभाग R.W.D. WORKS CIRCLE, PATNA
कार्य अंचल, पटना

NAME OF ROAD		F6 EMERGENT REPAIR OF ROAD FROM PURNA KASHA PIPAL CHAUK TO SITAPUR IN MOKAMA BLOCK									
SL No.	SDB SL NO	MORD RefNo	Description	Unit	NOS	LENGTH	WIDTH	HEIGHT	QUANTITY	RATE	AMOUNT (In Rs.)
1			Supplying Brick bats with carriages at site including labour cess ,GST and seigniorage fee (excluding over head and CP).								
				Cum					305.485		531849.10
									-356.40	1741.00	-620492.40
3			Supplying Unskilled Labour for Brick bats for spreading compacting and leveling and laying and filling in empty cement bag including labour cess , GST and (excluding over head and CP).						270.10		88501.40
				NOS.					-315.00-	329.00	-403635.00

JE (RWD)
28.10.21

AE (RWD)
28/10/2021

TOTAL 224137.40

620350.10

EE (RWD)
WORK DIVISION
BADH

6.10.21

NAME OF ROAD

EMERGENT REPAIR OF ROAD FROM PURNA
KASHA PIPAL CHAUK TO SITAPUR IN MOKAMA
BLOCK

BRICK BATS POT MEASUREMENT

1.00 X 8.00 X 6.00 X 1.50 av 72.00
1.00 X 15.00 X 6.00 X 2.50 av 225.00

297.00 m³

254.571 X 1.2 = 305.485
~~356.4~~

Loose Qty:-

P. N. N. N.
28.10.21
JE (RWD)

[Signature]
28.10.21
AE (RWD)

[Signature]
EE (RWD)

WORK DIVISION
BADH

अधीक्षण अभियंता का कार्यालय,
ग्रामीण कार्य विभाग, कार्य अंचल, पटना।

/पटना, दिनांक-21/06/2021

851 (9-30)

अधीक्षण अभियंता
ग्रामीण कार्य विभाग
कार्य अंचल, पटना

प्रमंडल अभियंता
ग्रामीण कार्य विभाग,
प्रमंडल, बाढ़।

Very Short Notice No. RWD/FDR/Patna /01(2021-22) के तहत आमंत्रित कोटेशन
अनुबंध कार्य प्रमंडल, बाढ़ में न्यूनतम दर दाता के साथ एकरारनामा करने के संबंध में।

उपरोक्त विषय के संबंध में कहना है कि कोटेशन के माध्यम से प्राप्त आमंत्रित निविदा में
न्यूनतम दर दाता एवं वितीय दिवसों में सफल एवं न्यूनतम दर दाता M/S Sundar Nirman घोषित
जा रहा है। इनके द्वारा उद्धृत न्यूनतम दर इस पत्र के साथ संलग्न कर भेजी जा रही है। यदि दसों में
किसी भी दृष्टिगोचर हो तो अविलंब उसका निराकरण करा लिया जाये।

अतः आपको निदेश दिया जाता है कि उक्त संवेदक से 03 (तीन) दिनों के अंदर एकरारनामा
करा जाए उसकी सूचना अधोहस्ताक्षरी के कार्यालय में समर्पित करना सुनिश्चित करें साथ ही साथ अन्य
न्यूनतम दर अगर इसी न्यूनतम दर पर कार्य करने हेतु ईच्छुक हो तो उन्हें भी सूचीबद्ध कर ली जाये, ताकि
अनुबंध में आवश्यकता पड़ने पर उनसे काम लिया जा सके।

संबंधित संवेदक का प्राप्त अद्यतन की राशि पत्र के साथ संलग्न की जा रही है।

सूचक-यथोक्त।

विश्वासभाजन

अधीक्षण अभियंता

ग्रामीण कार्य विभाग, कार्य अंचल, पटना

21/06/21

21.06.21

		Empty Cement Bags, Synthetic should be old but in good condition of 1.20 cft. Capacity.	Each	Unit Price
1	Empty Cement Bags			Seventy One Paise
2	Bamboos	Bamboos should be 100mm dia 6 to 8m long.	Each	170.00
3	Brickbats		M3	1741.00
4	Local Sand		M3	117.00
5	Kilo Rubbish		M3	1068.00
6	Hume Pipe (NP3) 600mm Dia		M	1044.50
7	Hume Pipe (NP3) 1000mm Dia		M	3362.80
8	Boulders	Minimum Size 300mm	M3	1861.35
9	Granular Sub base Material Grading-II		M3	1814.00
10	Stone Metal Aggregates Gr-II		M3	1857.00
11	Stone Metal Aggregates Gr-III		M3	1810.26
12	Screening Material Type-B		M3	2712.58
13	Nylone Crate	Nylone crate of size 1m31ms1ms1m with 20gm mesh of specification 1260/3/4/21 ie having 2100 threads of weight 165 1/2-5gm	Each	45.00

Estimator

RWD

Wardha Circle Patna

परामर्शक प्रशासिका

परामर्शक प्रशासिका

परामर्शक प्रशासिका

तत्परिष्कार

तत्परिष्कार

तत्परिष्कार

Superintending Engineer

RWD

	Type	Output	Unit	Lowest M.S. Sundar Nirman Bidder Rate	Amount in Word
1	Unskilled Labour	110 cft. Soft Earth.	Each	329.00	Three Hundred & Twenty Nine Rupees
2	Semi Skilled Labour		Each	343.00	Three Hundred & Forty Three Rupees
3	Skilled labour		Each	418.00	Four Hundred & Eighteen Rupees
4	Mason		Each	306.00	Three Hundred & Ninty Six Rupees
5	Head mason		Each	445.00	Four Hundred & Forty Five Rupees
6	Bhisti		Each	329.00	Three Hundred & Twenty Nine Rupees
7	Carpenter		Each	396.00	Three Hundred & Ninty Six Rupees
8	Head Carpenter		Each	445.00	Four Hundred & Forty Five Rupees
9	Night Guard		Each	343.00	Three Hundred & Forty Three Rupees
10	Electrician		Each	421.00	Four Hundred & Twenty One Rupees

Estimator

R.W.D

Works Circle, Patna

प्रायकलन पदाधिकारी

आजीन कार्य विभाग

कार्य प्रचलन पट्टा

नगरपालिका सलाहकार

ग्रामीण कार्य विभाग

कार्य प्रचलन पट्टा

Superintending Engineer

R.W.D WORKS CIRCLE, PATNA

23/10/2021

23/10/2021

23/10/2021

23/10/2021

23/10/2021

23/10/2021

23/10/2021

23/10/2021

23/10/2021

III. TOOLS PLANS & MACHINERIES WITH PRICES TABLE

Works Division : Barh

SL	Description of Machine	Activity	Output of Machine	Unit	Lowest M/S Sundar Nirman Bidder Rate	Amount in Word
1.	Front End Loader 1.0 cum bucket capacity (JCB)	Soil Loading/Aggregate Loading	Cum/hour	Per Hour	1585.00	One Thousand Five Hundred & Eighty Five Rupees
2.	8-10 Ton Smooth Wheeled Roller	Compaction/Consolidation	Cum/hour	Per Hour	907.00	Nine Hundred & Seven Rupees
3.	Tractor with Trolley	Transportation of Material	25 HP Capacity	Ton/Trip	647.00	Six Hundred & Forty Seven Rupees
4.	Tipper	Transportation of Material	Cum	Ton/Trip	41.50	Forty One & Fifty Paise
5.	Tractor with Tipper	Transportation of Material	25 HP Capacity	Ton/Trip	667.50	Six Hundred Sixty Seven & Fifty Paise
6.	Generator Set	Generation of Electrical energy	KVA	Per Hour	4183.00	Four Thousand One Hundred & Eighty Three Rupees

Estimator
RWD
Works Circle, Patna

प्रमुख
21/06/24
प्रमुख
आजीव कार्य विभाग
कार्य प्रमुख

12.06.24
सहायक सलाहकार
आजीव कार्य विभाग
कार्य अधिकारी, पटना

12.06.24
Superintending Engineer
R.W.D. WORKS CIRCLE, PATNA

Inspection Report for Flood Damage Work

Date :- 24.11.2021

1. Name of PIUs :- Executive Engineer, R.W.D. Works (D) Bask

2. Name of Block / Road :- Mokama / Pura Kasha Pipal chaur to
Sitapur

A. For Road

1. Damage Location / Chainage :- Near ch. 2.300 and 2.500 Km

2. Damage Length :- 23 m

3. Nature of Damage :- Breach in the road due to flood.

i. Material being used in Restoration works :- Brick Bats

ii. Equipments / Tools being used in Restoration works : J.C.B., tractor

iii. Procedure taken up in Restoration works : Brick Bats ^{being} spreading

iv. Restored Length : 22 m

B. For Bridge

1. Damage Location / Chainage :-

2. Damage Length :-

3. Nature of Damage :-

4. Details of Restoration Works :-

i. Material being used in Restoration works :-

ii. Equipments / Tools being used in Restoration works :

iii. Procedure taken up in Restoration works :

iv. Restored Length :

[Signature]
24/11/21

Name of Inspector
Executive Engineer
R.W.D. Works Division, Patna

[Signature]
02.12.21
ME