



ग्रामीण कार्य विभाग

Rural Works Department, Govt of Bihar

GOVT. OF BIHAR
FDR
YEAR 2021-22

Detailed Project Report

Division : Rosera

District :	Samastipur	Block :	Bithan
Name of Road :	<u>Chardauli - sihma</u>		

SUBMITTED BY
THE EXECUTIVE ENGINEER
WORKS DIVISION, ROSERA

तकनीकी प्रतिवेदन

पथ का नाम:- Chardauli - sihma

प्राक्कलित राशि- 4.96
6.95 लाख

उपर्युक्त वर्णित पथ विगत बाढ़/बरसात वर्ष 2021-2022 से काफी छतिग्रस्त हो गए थे जिससे आवागमन काफी कठीनाईयुक्त हो गया था तथा दुर्घटनाए होती रहती थी जिसके कारण इस पथ को Brick bats आदि से भर कर मोटेरेबल किया गया है। पथ पर आवागमन जारी है।




Junior Engineer

RWD (w) Section, Bithan



Assistant Engineer

RWD (w) Sub Division, Bithan

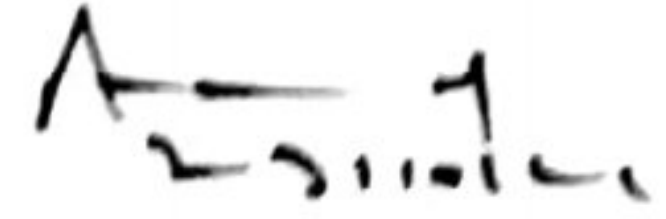

Executive Engineer

RWD (w)

Division, Rosera

I DR

Detailed Estimate for

Chardauli - sihma


Block : Bithan
District : Samastipur

ABSTRACT OF COST FOR ROAD

Sl No	Item of Work	Amount (In Rs)	
		As per Estimate	
1	Total Cost for Pavement Works		439047.34
	Total Cost of Project :	Rs -	439047.34
	Total Cost Including (GST + L.Cess) 13% :	Rs -	57076.15
	Total :	Rs -	496123.50
	Say (Lakh) :	Rs -	4.96


27/10/21
Junior Engineer
RWD (W) Section, Bithan


28/10/21
Asstt. Engineer
RWD (W) S. Div. Bithan

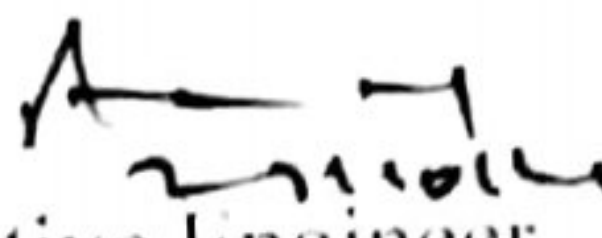
Executive Engineer
RWD (W) Div, Rosera

Technical Officer Approved for Rs 4.96 Lac say four Lakh —
ninety six thousand and only including O.H. charge.


10/11/21
T.A


10/11/21
T.A

FDR
Chardauli - sihma

District : Samastipur
Block : Bithan

Total Length (Km) 0.50

Sl. No.	Reference to Mod Spec	Brief Description of Item	No	Measurements			Unit	Quantity	Rate (Rs)	Amount (Rs)
				L (m)	B (m)	D (m)				
1	401	Supply filling brick bat compacted manually								
			1	25.00	3.60	0.15	cum	13.50		
			1	40.00	3.75	0.75	cum	112.50		
			1	50.00	3.00	0.30	cum	45.00		
			5	25.00	1.39	0.30	cum	52.13		
			2	30.00	1.75	0.30	cum	31.50		
		Total Quantity :					cum	254.63	1724.29	439047.54
		Total Cost of Pavement in Rs :								4.39


Junior Engineer
RWD (W) Section, Bithan


Asstt. Engineer
RWD (W) S. Div. Bithan


Executive Engineer
RWD (W) Div. Rosera

**ग्रामीण कार्य विभाग, कार्य प्रमंडल-रोसड़ा अंतर्गत FDR के तहत मरम्मत/Motorable कराए गये
पथों की जाँच की सूची।**

क्रम	प्रखंड	पथ का नाम	कराए गए कार्य	मरम्मत कराए जाने हेतु पथ की लम्बाई किलोमीटर	मरम्मत कराए जाने हेतु पथ की राशी	अभियुक्ती
1	Bithan	Larjhaghat to Darbhanga Jila ke Samalla Path	Brick Bat Filling	0.700	7.86	पूर्ण
2	Bithan	Parkauli - Tetrahi	Brick Bat Filling	0.9	11.09	पूर्ण
3	Bithan	Village Bardauni (T01) To Manorwa Khaira	Brick Bat Filling	0.3	4.93	पूर्ण
4	Bithan	L023-L022 to Khota tilakpur (TRACK23)	Brick Bat Filling	0.25	7.68	पूर्ण
5	Bithan	MDR - Laxminia	Brick Bat Filling	0.3	13.97	पूर्ण
6	Bithan	Chardauli - Sihma	Brick Bat Filling	0.3	4.96	पूर्ण
7	Bithan	L053-L038 Tetrahi to Shanichara	Brick Bat Filling	0.25	5.67	पूर्ण
8	Bithan	L051-T01 Bardauni to Manorwa Khera	Brick Bat Filling	0.3	4.15	पूर्ण
9	Bithan	L048-L037 To Khairakot	Brick Bat Filling	0.3	7.83	पूर्ण
10	Bithan	PWD Road to Kelwari Dhala To Kelwari Village	Brick Bat Filling	0.3	3.76	पूर्ण
11	Bithan	L034-T02 To Marthua (VR34)	Brick Bat Filling	0.3	4.85	पूर्ण
12	Bithan	L028-T01 Tabolao Padri Near Pushaho (VR28)	Brick Bat Filling	0.3	19.71	पूर्ण
13	Bithan	L047-T01 to Salhabujurg (TRACK47)	Brick Bat Filling	0.6	12.95	पूर्ण
14	Bithan	L046-L045 To Salha Chandan (TRACK46)	Brick Bat Filling	0.3	5.46	पूर्ण
15	Bithan	Bithan High School Phool Gachhi To Parri Vaya Batardiha Path	Brick Bat Filling	0.3	8.23	पूर्ण
16	Bithan	To2 to Belsandi	Brick Bat Filling	0.2	2.75	पूर्ण
17	Bithan	Bithan REO Road to Karanchi Sirsia	Brick Bat Filling	0.7	9.79	पूर्ण
18	Bithan	Bithan- Jagmohra	Brick Bat Filling	0.3	3.35	पूर्ण
19	Bithan	L045-T01 To Chirautana (TRACK45)	Brick Bat Filling	0.3	5.71	पूर्ण
20	Bithan	L056-L045 to Salha chanda RCC Beidge at ch-900 m	Brick Bat Filling	0.6	6.25	पूर्ण

Rasmi
०१/०२/२५

कार्यपालक अभियंता

ग्रामीण कार्य विभाग, कार्य प्रमंडल-मझौल-बखड़ी