



ग्रामीण कार्य विभाग

Rural Works Department, Govt of Bihar

बिहार ग्रामीण एवं किसान पूंजी




BIHAR RURAL ROADS PROJECT

Bihar Rural Road Development Agency (BRRDA)

Govt. of Bihar

EMERGENT REPAIR OF ROAD FROM AASHOPUR SURYA MANDIR TO OM NAGAR (Surya Nagar) DEEPAK JI HOUSE UNDER FDR

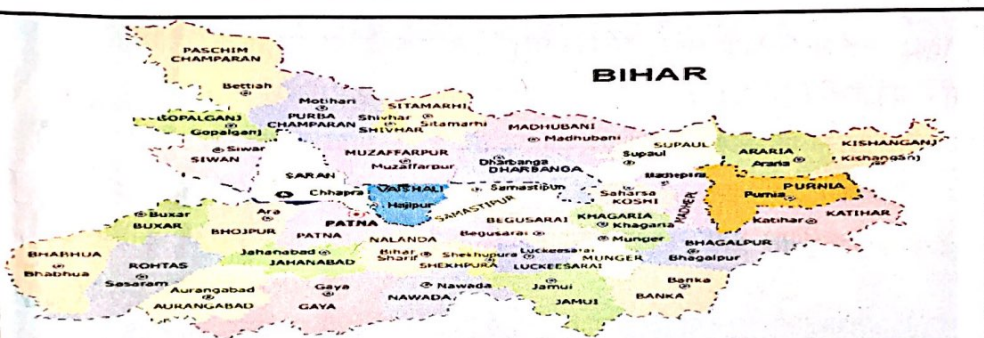

Name of the Road :-

EMERGENT REPAIR OF ROAD FROM AASHOPUR SURYA MANDIR TO OM NAGAR (Surya Nagar)
DEEPAK JI HOUSE UNDER FDR

DISTRICT	:	Patna	
DIVISION	:	DANAPUR	
BLOCK	:	DANAPUR	
Total Damaged length of Road		0.75	km
TOTAL COST OF CONSTRUCTION	:	28.867	Lacs
TOTAL COST OF PROJECT	:	28.867	Lacs

Executive Engineer
Rural Works Division,
DANAPUR

प्रतिवेदन

कार्य का नाम : आशोपुर सूर्यमंदिर से ओमनगर (सूर्यनगर) दीपक जी के घर तक पथ की आपातकालीन मरम्मत ।

पथ की लम्बाई : 0.750 कि०मी०

प्राक्कलित राशि : रू० 28.867 लाख

मद : एफ० डी० आर०

प्रस्तुत प्राक्कलन दानापुर प्रखण्ड अंतर्गत आशोपुर सूर्यमंदिर से ओमनगर (सूर्यनगर) दीपक जी के घर तक पथ की आपातकालीन मरम्मत हेतु एकरारनामित दर पर रू० 28.867 लाख (अट्ठाईस लाख छियासी हजार सात सौ रूपये) मात्र का तैयार किया गया है । विगत पिछले माह में लगातार अतिवृष्टि के कारण पथ में बड़े-बड़े गड्ढे बन गये हैं । विभागीय निर्देशानुसार पथ को यातायात योग्य बनाना है, जिसके लिए पहले से ही संवेदक चयनित है । पथ के क्षतिग्रस्त पथांश में ब्रीक्स वैट भर दिया गया है । वर्तमान में आवागमन चालू है । अतः कार्यहित में प्राक्कलन की स्वीकृति अति आवश्यक है ।


कनीय अभियंता
दानापुर


सहायक अभियंता
दानापुर


कार्यपालक अभियंता
(ग्रामीण कार्य विभाग)
कार्य प्रमंडल दानापुर
24/10

SUMMARY OF COST ESTIMATE FOR THE PROJECT

NAME OF ROAD :		EMERGENT REPAIR OF ROAD FROM AASHOPUR SURYA MANDIR TO OM NAGAR (Surya Nagar) DEEPAK JI HOUSE UNDER FDR
DISTRICT		PATNA
BLOCK		DANAPUR
DIVISION		DANAPUR
Total Damaged length of Road		0.75 km
Sl. No.	DESCRIPTION	AMOUNT (LAKHS)
1	COST OF ITEM	2474242.52 ₹ 28,86,686.35
	TOTAL COST IN LACS =	28.867 24.712

Brish
JE
RWD
31/08/21

Sikam
AE
RWD
31/8/21

Lee
EE
RWD
9/11/21
28/10/21

Technically sanctioned for Rs. ~~24.7424~~ *24.7424* Rupees ~~Twenty Four~~ *Twenty Four*
~~Lakh Seventy Four Thousand and Two hundred only~~ *Lakh Seventy Four Thousand and Two hundred only*

~~including five year Maintenance Cost~~

Certified copy
Akshay
14/12/2021
Superintending Engineer
R.W.D. WORKS CIRCLE, PATNA
13/12/21

sd
सहायकी सलाहकार
ग्रामीण कार्य विभाग
कार्य अंचल, पटना

sd
Superintending Engineer
R.W.D. WORKS CIRCLE, PATNA

Panapur - Nakta (NEA22000956)

Mukhya khagaul road batala to adampur mushari tak ki ore jane wali road (10109614)

Raghuram panchayat Turha Toli Nurpur chandmari to Sikandarpur Mushari tak and Khirnichak to Dhanesar singh house (10109618)

Danapur Cantonment to Chand mani Lodipur bandh tak (10109621)

Sarvoday City Adampur to Lakhani Bigha Tak3 (1121035025)

Hathiyaakandhi to Hanumanganj Tak (1121035026)

Hathiya kandh panchayat laxmichhak gram me usari Main road to Laxmichhak Transformer (1121036562)

Jamsaut panchayat kali sthan to Ashopur road (1121036563)

Parsa Sampachhak RCD Road to Abdullahchhak (1121038915)

Ashopur Surya Mandir to Om Nagar (Surya Nagar) Deepak Jee K Ghar Tak K Ghar Tak (1121607702)

Ashopur Surya Mandir to Om Nagar (Surya Nagar) Deepak Jee K Ghar Tak K Ghar Tak (1121705278)

Ashopur Surya Mandir to Om Nagar (Surya Nagar) Deepak Jee K Ghar Tak K Ghar Tak (1121705278)

Road Name	Road Status	Ongoing	Is Maintenance	No	Is Agreement or Not	Select
Tentative Restoration Amount (in Lac)	Actual Restoration Amount (in Lac)	Intermediate Point Ex : Lat = 26.902013 & Lon = 84.618675	End Point Ex : Lat = 26.902013 & Lon = 84.618675	FDR Length (in Km)		
Start Point Ex : Lat = 26.902013 & Lon = 84.618675	Latitude	Longitude	Latitude	Longitude		
Latitude	Longitude	Remarks				
Upload Image: Choose Files	No file chosen					
Max. File Image						
Submit						

...enables you cannot update data of that road/bridge.

मुख्य अभियंता-4 का कार्यालय
ग्रामीण कार्य विभाग

पत्रांक:- मु0अ0-4(मु0)विविध(कार्य)-23-167/2018-295 दिनांक- 29/7/2021

प्रेषक-

अशोक कुमार मिश्रा,
अभियंता प्रमुख,

सेवा में,

कार्यपालक अभियंता,
कार्य प्रमंडल, दानापुर,

विषय:-

प्रखंड दानापुर अंतर्गत आसोपुर सूर्य मंदिर से ओमनगर (सूर्य नगर) दीपक जी के घर तक पथ के मोटरेबुल कार्य के संबंध में।


प्रसंग:-


अधीक्षण अभियंता कार्य अंचल, पटना का पत्रांक-923 अनु0 दिनांक- 02.07.2021

महाशय,

उपर्युक्त विषय एवं प्रासंगिक पत्र के संबंध में कहना है कि विषयांकित पथ के मोटरेबुल किये जाने के प्रस्ताव पर विभागीय सचिव का अनुमोदन प्राप्त है। अतः अनुरोध है कि अग्रेत्तर कार्रवाई सुनिश्चित किया जाय।

विश्वासभाजन


(अशोक कुमार मिश्रा)
अभियंता प्रमुख

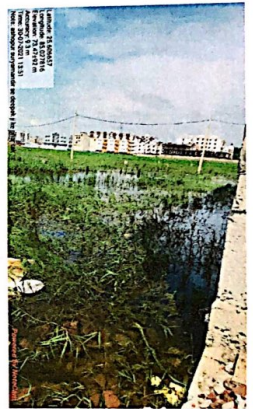



31/5/21


BR



BR



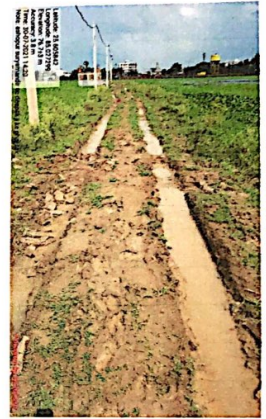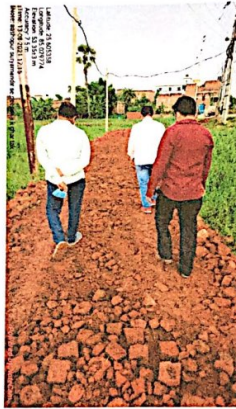

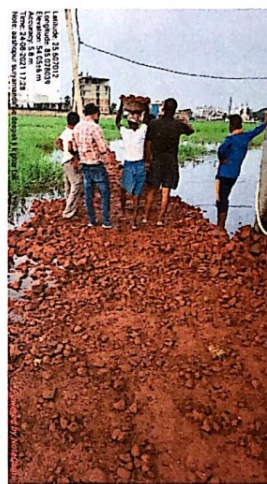

B. Anand
 31/08/21
 800
 30/08/21
 12
 A. S.



9/11/21
 AR
 26/10



F6

EMERGENT REPAIR OF ROAD FROM AASHOPUR SURYA MANDIR TO OM NAGAR (Surya Nagar) DEEPAK JI HOUSE

NAME OF ROAD

Sl. No.	SDB Sl. No	MORD Ref. No	Description	Unit	NOS	LENGTH	WIDTH	HEIGHT	QUANTITY	RATE	AMOUNT (in Rs.)
1			Supplying Brick bats with carriages at site including labour cess ,GST and seigniorage fee (excluding over head and CP).						1047.429		2087167.52
				Cum					1572.15	1549.00	2435260.35
2			Supplying Unskilled Labour for Brick bats for spreading compacting and leveling including labour cess , GST and (excluding over head and CP).						1191.00		387075.00
				nos.					1389.80	325.00	451425.00
									TOTAL	Rs	₹ 28,86,685.35

JE (RWD) / Danapur
21/08/24

AE (RWD)
21/8/24

EE (RWD)
WORK DIVISION
DANAPUR
21/09/24

217422.52
= 24742.52

NAME OF ROAD AASHOPUR SURYA MANDIR TO OM NAGAR (Surya Nagar)
DEEPAK JI HOUSE UNDER FDR

BLOCK - DANAPUR

POT MEASUREMENT

1) BRICK BATS

NO.		L		W		H		m3
				Avg.				
1	x	490.00	x	(2.20+2.80)/2	x	0.60	=	735.00
1	x	50.00	x	(2.50 + 4.30)/2	x	0.80	=	136.00
1	x	150.00	x	(2.00 + 4.10)/2	x	0.75	=	343.125
1	x	60.00	x	(1.50+2.50)/2	x	0.80	=	96.00
TOTAL Qty =								1310.125
Loose =								1310.125 x 1.2
								1572.15

Alteration of less -
 $10 \cdot 10 \cdot 00 \times 12 = 112000$
 $\frac{112000}{14} = 8000$
 1310.125 - 8000 = 1120.125
 1120.125 x 1.2 = 1344.15

SEIGNORANCE

S.no.	Item	Unit	Qty	Basic Rate	Amount	10 % seig	
1	Brick Bats	m3	1572.15	1062.00	1669623.30	166962.33	

[Signature]
JE 31/08/21

[Signature]
AE 31/8/21

[Signature]
EE 29/11/21
RWD
[Signature]
26/10

कार्यपालक अभियंता का कार्यालय
ग्रामीण कार्य विभाग, कार्य प्रमंडल, मसौदी

पत्रांक- 1217 (350)

मसौदी/दिनांक- 06-12-2021

प्रेषक- कार्यपालक अभियंता
ग्रामीण कार्य विभाग
कार्य प्रमंडल, मसौदी।

संवा में
अधीक्षण अभियंता
ग्रामीण कार्य विभाग
कार्य अंचल, पटना।

विषय- वर्ष-2020 में अतिवृष्टि/बाढ़ से क्षतिग्रस्त पथों को मोटरेबुल करने हेतु किये गए कार्य की
जॉच के संबंध में।

प्रसंग- विभागीय पत्रांक-मु0अ0-4(सु0) विविध(कार्य)-23-291/2019-4589 दिनांक-13.11.2021
एवं भवदीय के पत्रांक-1482 दिनांक-25.09.2021

महोदय,
उपरोक्त विषयक प्रासंगिक पत्र के निर्देश के आलोक में ग्रामीण कार्य विभाग, कार्य प्रमंडल,
दमनापुर का निम्नलिखित नौ(09) पथों का दिनांक-24.11.2021 एवं 26.11.2021 को बाढ़ क्षतिग्रस्त
मरम्मत कार्य का जॉच किया गया एवं किया गया संतोषप्रद पाया गया।

सूचनार्थ समर्पित।

क्रमांक	पथ का नाम	पथ की लम्बाई	क्षतिग्रस्त पथ की ल0 (कि0मी0)
1	कंदलपुरा से शंकरपुर भाया हरशामचक		
2	PMGSY रोड से Old पानापुर	11.40	0.030
3	T01 old पानापुर से कंदलपुरा	0.600	0.300
4	पानापुर से शंकरपुर भाया हरशाम चक माधोपुर	4.920	0.540
5	आरवापुर सुर्य मंदिर से आमनगर (सुर्य नगर) दीपक जी के घर तक	6.90	0.820
		0.750	0.750
6	शंकरदाहा मोड़ से नवरतनपुर		
7	रामवाट से सुअरमरवा	1.05	0.250
8	REO रोड से बाजितपुर मोड़	2.00	0.470
9	गुनर से रामवाट	3.00	2.10
		2.10	2.10

अनु- निरीक्षण प्रतिवेदन प्रपत्र संलग्न।
(दा प्रतियो में)

विश्वरामा गज

कार्यपालक अभियंता
ग्रामीण कार्य विभाग
कार्य प्रमंडल, मसौदी।

Inspection Report for Flood Damage Work

Date :- 27-11-2021

1. Name of PIUs :- E.E. R.W.D (W) Division - Dhanpur.
2. Name of Block / Road :- Dhanpur / Emergent Repair of Road from
Aabhapur Surges towards to Om Nagar (Surges)
Deepkies House etc. due to Heavy Rain
& Flood.
- A. For Road
 1. Damage Location / Chainage :- In 1st K.M. where ever is required.
 2. Damage Length :- 0.750 K.M. with whole length.
 3. Nature of Damage :- Road damaged due to Heavy rain & Flood.
 - i. Material being used in Restoration works :- Brick bds.
 - ii. Equipments / Tools being used in Restoration works : JCB, Tractor, Roller.
 - iii. Procedure taken up in Restoration works : By Filling Brick bds.
 - iv. Restored Length : 0.750 K.M. - Restoration work done in damaged portion (whole length where is required)
- B. For Road Bridge.
 1. Damage Location / Chainage :-
 2. Damage Length :-] NIL
 3. Nature of Damage :-]
 4. Details of Restoration Works :-
 - i. Material being used in Restoration works :- Brick Bds
 - ii. Equipments / Tools being used in Restoration works : JCB, Tractor, Roller
 - iii. Procedure taken up in Restoration works : By Filling Brick bds.
 - iv. Restored Length : 0.750 K.M.

By
27/11/21
SE/Manager
27/11/21
PB

Agd
27/11/21
Name of Inspector
Executive Engineer
R.W.D. Works Division, Masaurhi