



ग्रामीण कार्य विभाग

Rural Works Department, Govt of Bihar




BIHAR RURAL ROADS PROJECT

Bihar Rural Road Development Agency (BRRDA)

Govt. of Bihar

EMERGENT REPAIR OF ROAD FROM L039 - FATUHA NIYAZIPUR PMGSY ROAD TO BUDDHU CHAK VIA MOMINPUR (VR 30) UNDER FDR

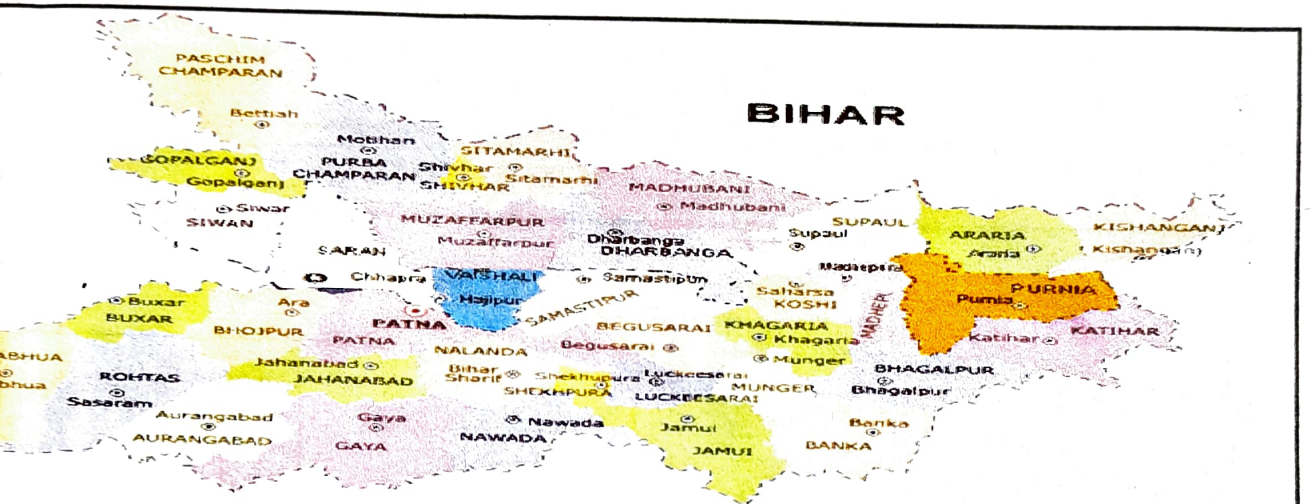

Location of the Road :-

EMERGENT REPAIR OF ROAD FROM L039 - FATUHA NIYAZIPUR PMGSY ROAD TO BUDDHU CHAK VIA MOMINPUR (VR 30) UNDER FDR

Location of the Road	:	Patna	
Location of the Road	:	Patna	
Location of the Road	:	Fatuha	
Damaged length of Road		425.00 / 3.0	m
Estimated Cost of Construction	:	1.463	Lacs
Total Cost of Project	:	1.463	Lacs

Executive Engineer
Rural Works Division,
Patna

SUMMARY OF COST ESTIMATE FOR THE PROJECT

NAME OF ROAD :		EMERGENT REPAIR OF ROAD FROM L039- FATUHA NIYAZIPUR PMGSY ROAD TO BUDDHU CHAK VIA MOMINPUR (VR 30) FDR	
DISTRICT		PATNA	
BLOCK		FATUHA	
DIVISION		PATNA	
Total Damaged length of Road		13.0	425.00 m
Sl. No.	DESCRIPTION	AMOUNT (LAKHS)	
1	COST OF ITEM	125465.40 ₹ 1,46,277.00	
	TOTAL COST IN LACS =	1.463 1.255	

[Signature]
JE
RWD

[Signature]
AE
RWD

[Signature]
EE
RWD

Technically sanctioned for Rs. 1.255 Lacs ~~One lakh~~
Twenty Five thousand and five hundred only
including five year Maintenance Cost

[Signature]
Superintending Engineer
R.W.D. WORKS CIRCLE, PATNA

[Signature] *[Signature]*
तकनीकी सलाहकार
ग्रामीण कार्य विभाग
कार्य अंचल, पटना
Superintending Engineer
R.W.D. WORKS CIRCLE, PATNA

[Signature]
14/12/21
Superintending Engineer
R.W.D. WORKS CIRCLE, PATNA

प्रतिवेदन

कार्य का नाम :

पटना जिलान्तर्गत फतुहॉ प्रखंड के एल039- फतुहॉ
नियाजीपुर पी0एम0जी0एस0वाई0 रोड से बुद्धु चक
भाया मोमिनपुर (VR-30) तक पथ की आपातकालीन
मरम्मति ।

क्षतिग्रस्त पथ की लम्बाई:- 13'00 425.00 मी०

प्राक्कलित राशि: रु० 1.463 लाख

मद : एफ०डी०आर०

प्रस्तुत प्राक्कलन पटना जिलान्तर्गत फतुहॉ प्रखंड के एल0 39-फतुहॉ
नियाजीपुर पी0एम0जी0एस0वाई0 रोड से बुद्धु चक भाया मोमिनपुर (VR-30) तक पथ की
आपातकालीन मरम्मति का वर्तमान स्वीकृत दर पर रु० 1.463 लाख (एक लाख छियालीस
हजार तीन सौ रुपये) मात्र का तैयार किया गया है । पिछले माह आई बाढ़ एवं अतिवृष्ट
से पथ काफी क्षतिग्रस्त हो गया है, जिसकी मरम्मति हेतु संवेदक पहले से ही चयनित है ।
विभागीय निर्देशानुसार पथ को आवागमन योग्य बनाने हेतु पथ में ब्रीक्स वैट भर दिया
गया है । अतः कार्यहित में प्राक्कलन की स्वीकृति आवश्यक है ।


कनीय अभियंता
फतुहॉ


सहायक अभियंता
फतुहॉ


कार्यपालक अभियंता
(ग्रामीण कार्य विभाग)
कार्य प्रमंडल, पटना

Inspection Report for Flood Damage Work

Date :- 22-11-2021

1. Name of PIUs :- E.E. R.W.D(W), Division - Patna

2. Name of Block / Road :- Fatuha / Emergent Repair of road from
LD39 - Fatuha Niyazipur PMGSY Road to
Buddhu Chak via Mominpur (R30) Under FDR
A. For Road Due to Flood.

1. Damage Location / Chainage :- In whole length where ever required
at chainage 1.50 to 1.91 & 2.0 to 2.06

2. Damage Length :- 13.0 m

3. Nature of Damage :- Road Breach & Road crest Damage.

i. Material being used in Restoration works :- Brick - Bats

ii. Equipments / Tools being used in Restoration works : Tractor, Roller, JCB etc.

iii. Procedure taken up in Restoration works : By Filling Brick Bats material

iv. Restored Length : 13.0 m.

B. For Road Bridge

1. Damage Location / Chainage :-
2. Damage Length :-
3. Nature of Damage :- } NIL

4. Details of Restoration Works :-


i. Material being used in Restoration works :- Brick Bats

ii. Equipments / Tools being used in Restoration works : Tractor, Roller etc.

iii. Procedure taken up in Restoration works : By Filling Brick Bats material

iv. Restored Length : 13.0 m.


06/12/21
AE


Name of Inspector
Executive Engineer
R.W.D. Works Division, Masaurhi

EE
RWD