



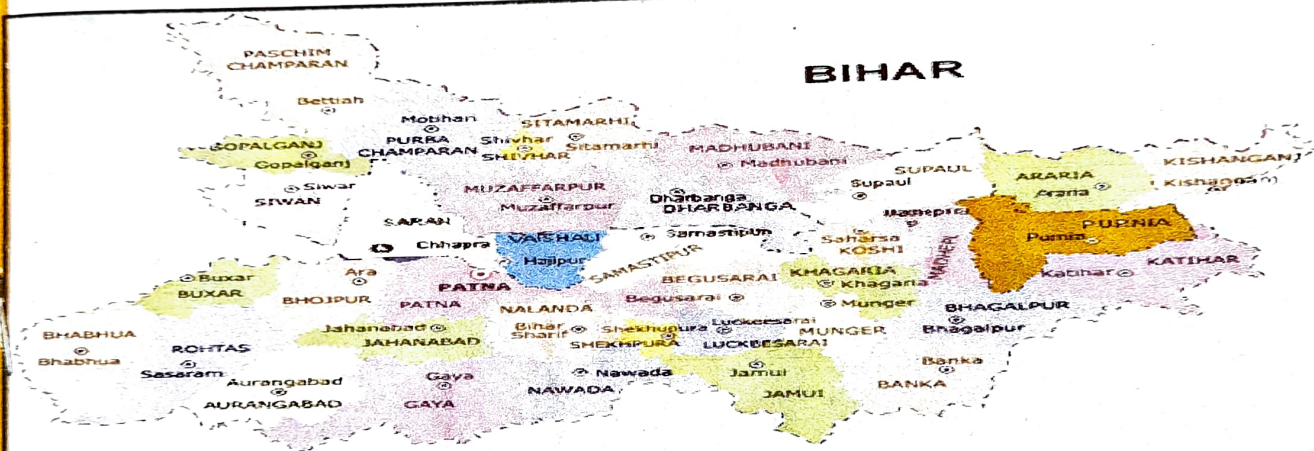
ग्रामीण कार्य विभाग

Rural Works Department, Govt of Bihar



BIHAR RURAL ROADS PROJECT Bihar Rural Road Development Agency (BRRDA) Govt. of Bihar

EMERGENT REPAIR OF ROAD FROM PUNADIH SCHOOL TO MURAJPUR UNDER FDR



Name of the Road :-

EMERGENT REPAIR OF ROAD FROM PUNADIH SCHOOL TO MURAJPUR UNDER FDR

DISTRICT	:	Patna	
DIVISION	:	Patna	
BLOCK	:	Patna Sadar	
Total Damaged length of Road		40.00	m
TOTAL COST OF CONSTRUCTION	:	0.60	Lacs
TOTAL COST OF PROJECT	:	0.60	Lacs

Executive Engineer

Rural Works Division,

Patna

SUMMARY OF COST ESTIMATE FOR THE PROJECT

NAME OF ROAD :		EMERGENT REPAIR OF ROAD FROM PUNADIH SCHOOL TO MURAJPUR UNDER FDR	
DISTRICT		PATNA	
BLOCK		PATNA SADAR	
DIVISION		PATNA	
Total Damaged length of Road		40.00 m	
Sl. No.	DESCRIPTION	AMOUNT (LAKHS)	
1	COST OF ITEM	55657.00 ₹ 59,977.92	
	TOTAL COST IN LACS =	0.600 0.557	

[Signature]
23.9.21
JE
RWD

[Signature]
23/9/21
AE
RWD

[Signature]
11/12/21
EE
RWD

Technically sanctioned for Rs 0.557 lac (Rupees Fifty
five thousand and seven hundred only)
including five year Maintenance Cost

तकनिकी सलाहकार Superintending Engineer
ग्रामीण कार्य विभाग R.W.D. WORKS CIRCLE, PATNA
कार्य अंचल, पटना

Certified copy
Amma
18/12/2021
Superintending Engineer
R.W.D. WORKS CIRCLE, PATNA
[Signature]
18/12/21

Inspection Report for Flood Damage Work

Date :- 22.11.2021

1. Name of PIUs :- E.L. R.W.D. (W) Division, Patna

2. Name of Block / Road :- Patna Sadar / Punadik School to Murajpur

A. For Road

1. Damage Location / Chainage :- In whole length where ever required

2. Damage Length :- 40m

3. Nature of Damage :- Road crust & Flank damage

i. Material being used in Restoration works :- Brick bats

ii. Equipments / Tools being used in Restoration works :- J.C.B, Tractor & Roller

iii. Procedure taken up in Restoration works :- laying, spreading & compacting

iv. Restored Length : 40m

B. For Road

1. Damage Location / Chainage :- NIL

2. Damage Length :-

3. Nature of Damage :-

4. Details of Restoration Works :-

i. Material being used in Restoration works :- Brick bats

ii. Equipments / Tools being used in Restoration works :- J.C.B, Tractor & Roller

iii. Procedure taken up in Restoration works :- laying, spreading & compacting

iv. Restored Length : 40m



06/12/21
AE

APC
Name of Inspector
Executive Engineer
R.W.D. Works Division, Masaurhi


प्रतिवेदन

कार्य का नाम : पुनाडीह से मुराजपुर तक पथ की आपातकालीन मरम्मत ।
पथ की लम्बाई : 0.040 कि० मी०
प्राक्कलित राशि : रू० 0.60 लाख
मद : एफ० डी० आर०

प्रस्तुत प्राक्कलन पटना सदर प्रखण्ड अंतर्गत पुनाडीह से मुराजपुर तक पथ की आपातकालीन मरम्मत हेतु एकरारनामित दर पर रू० 0.60 लाख (साठ हजार रूपये) मात्र का तैयार किया गया है। विगत पिछले माह में बाढ़ एवं अतिवृष्टि के कारण पथ में बड़े-बड़े गड्ढे बन गये हैं। विभागीय निर्देशानुसार पथ को यातायात योग्य बनाना है, जिसके लिए पहले से ही संवेदक चयनित है। पथ के क्षतिग्रस्त पथांश में ब्रीक्स वैट भर दिया गया है। वर्तमान में आवागमन चालू है। अतः कार्यहित में प्राक्कलन की स्वीकृति अति आवश्यक है।


23.9.21
कनीय अभियंता
पटना सदर


सहायक अभियंता
पटना सदर


11/11/21
कार्यपालक अभियंता
(ग्रामीण कार्य विभाग)
कार्य प्रमंडल, पटना

F6

NAME OF ROAD

EMERGENT REPAIR OF ROAD FROM PUNADIH SCHOOL TO MURAJPUR UNDER FDR

Sl. No.	SDB SL. NO	MORD Ref.No	Description	Unit	NOS	LENGTH	WIDTH	HEIGHT	QUANTITY	RATE	AMOUNT (in Rs.)
1			Supplying Brick bats with carriages at site including labour cess ,GST and seigniorage fee (excluding over head and CP).								
				Cum					30.703 33.12	1,541.00	47313.00 51,037.92
2			Supplying Unskilled Labour for Brick bats for spreading compacting and leveling including labour cess , GST and (excluding over head and CP).								
				nos.					30.00 28 Nos	298.00	8340.00 8,940.00
TOTAL										Rs	₹ 59,977.92

[Signature]
23.9.21
JE (RWD)

[Signature]
21/9/21
AE(RWD)

[Signature]
EE (RWD)
WORK DIVISION
PATNA

55657.00

= 0.557

NAME OF ROAD	EMERGENT REPAIR OF ROAD FROM PUNADIII SCHOOL TO MURAJPUR UNDER FDR
--------------	---

BLOCK - PATNA SADAR				DIVISION -PATNA					
POT MEASUREMENT									
1)	BRICK BATS	NO.		L		W		H	m3
		1	x	23.00	x	4.00	x	0.3	27.60
		1	x	1.50	x	1.00	x	1.5	2.25
TOTAL Qty =								27.60 29.85	m3
Loose		=		25.586	x	1.20	=	33.12	30.703

Above less VWP of
 $29.85 \times 12 = 25.586$
 $\frac{1}{14}$

SEIGNORANCE

S.no.	Item	Unit	Qty	Basic Rate	Amount	10 % seig	
1	Brick Bats	m3	30.703 33.12	1062.00	32606.59 35173.44	3517.34	

3260.66

[Signature]
 23.09.21
 JE

[Signature]
 23/09/21
 AE

[Signature]
 11/11/21
 EE
 RWD