



ग्रामीण कार्य विभाग

RURAL WORKS DEPARTMENT, GOVT OF BIHAR

DETAILED PROJECT REPORT FOR FDR 2021-2022



Name of Road :-	NH-28 To Ganesh Baitha House to Brita Tola Chakbara		
DISTRICT	EAST CHAMPARAN		
DIVISION	CHAKIA		
BLOCK	CHAKIA		
TOTAL LENGTH OF ROAD	2.73	KM	
COST OF RECTIFICATION	4.433.406	LAC	

Inspection Report For Flood Damage Work

Date :-

1. Name of PIUs- Executive Engineer RWD, Chakia,
2. Name of Block- Chakia
3. Name of Road- NH-28 to Ganesh Baitha House to Birta Tola chak bara,

(A) For Road

1. Damage Location/ Chainage:- 1000 - 2200 mtr
2. Damage Length:- 300 mtr
3. Nature Of Damage:- Road damaged due to Heavy rain & water logging.
4. Details Of Restoration works:-

- (i) Material being used in restoration works:- Brick bat, local Sand,
- (ii) equipments / Tools being used in Restoration works:- Tractor, JCB, Static Roller,
- (iii) Procedure taken up in Restoration Works:- Departmental.
- (iv) Restored length:- 300 mtr

work found satisfactory.

Signature  Inspecting officer
Executive Engineer
Rural Works Department
Works Division, Raxaul

प्रतिवेदन

कार्य का नाम :- NH28 to Ganesha Bath house to Bihari to Chakdara,

.....पथ में अप्रत्याशित बाढ़ / अतिवृष्टि 2021 से क्षतिग्रस्त पथ में यातायात चालू करने हेतु आपातकालीन मरम्मत कार्य।


प्रखण्ड :- चकिया

वित्तीय वर्ष : 2021-2022

प्रकल्पित राशि :-

प्रस्तुत प्राक्कलन, जिसकी प्रकल्पित राशि 4.43 लाख है, प्रखण्ड चकिया में यातायात बहाली हेतु आपातकालीन मरम्मत के लिए तैयार किया गया है।

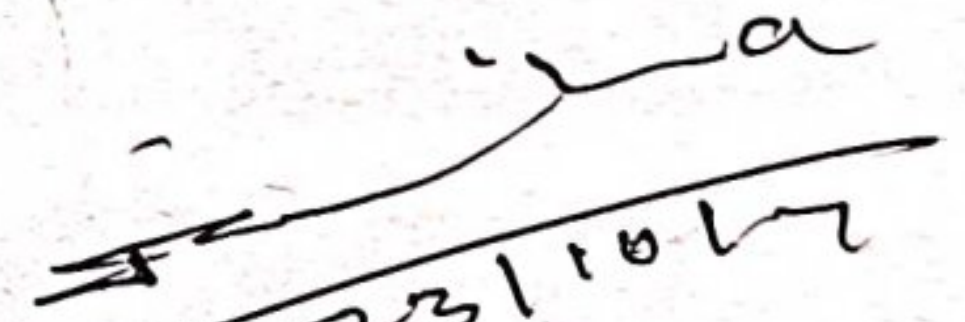
अभियंता प्रमुख, ग्रामीण कार्य विभाग, बिहार पटना के पत्रांक 4275 दिनांक 22/10/21 द्वारा दिये गए निर्देश के आलोक में उक्त पथ के क्षतिग्रस्त भाग में brick Bats & Local sand भरकर पथ को चालू करने का प्रावधान किया गया है। प्राक्कलन वर्तमान चालू अनुसूचित दर पर तैयार किया गया है। इसकी घटनोत्तर स्वीकृति अपेक्षित है।


23/10/21

कनीय अभियंता
ग्रामीण कार्य विभाग
कार्य प्रशाखा चकिया


23/10/21

सहायक अभियंता
ग्रामीण कार्य विभाग
कार्य अवर प्रमंडल चकिया


23/10/21

कार्यपालक अभियंता
ग्रामीण कार्य विभाग
कार्य प्रमंडल चकिया

GENERAL ABSTRACT OF COST FOR FDR

Name of road NH-28 To Ganesh Baitha House to Brita Tola Chakbara
District EAST CHAMPARAN
Block CHAKIA
Division CHAKIA
Length of road (in Km) 2.73

L NO	DESCRIPTION	AMOUNT (LAKHS)
1	Excavation in soil using hydraulic excavator	-
2	Brick bats	421,043.00
3	Sand filling	22,283.00
4	Sand bags	
5	Bamboo piles	
Total		INR 443,326.00

391308.00
14650.00

4,05,964.00

say 4,05,000/-

Abai
28/10/21

Junior Engineer
Rural Works Department
Work Section,
Chakia

23/11/21

Assistant Engineer
Rural Works Department
Work Sub Division
Chakia

23/10/21

Executive Engineer
Rural Works Department
Works Division,
Chakia

Post factum is accorded for Rs. 4,06,000.00
(four crore six thousand
hundred) only

S.E. (R.W.D.)
works Circle
Motihari

SL NO.	SBD SL NO.	MORD REF NO.	DESCRIPTION	UNIT	QUANTITY	UNIT PRICE (IN RS.)
1	3.5	302(iii)	Excavation in soil using Hydraulic Excavator excavation for roadwork in soil with hydarulic excavator of 0.9 cum bucket capacity including cutting only and as per Technical Specification Clause 302.3			
			Appendix -1	cum	0	112.47
2			Brick Bats laying Brick Bats in ditches as per direction and specification with all complete job			
			Appendix -II	cum	204.35	2060.40
			Sand Filling Filling in founfation trenches as per drawing and technical specificalat clause 305.3.9			421043
3			Appendix -III	cum	48.45	459.91
						22283

1914.89 291308.00

302.50 14656.00

Name of Road :- NH-28 To Ganesh Baitha House to Brita Tola Chakbara

Block :- CHAKIA

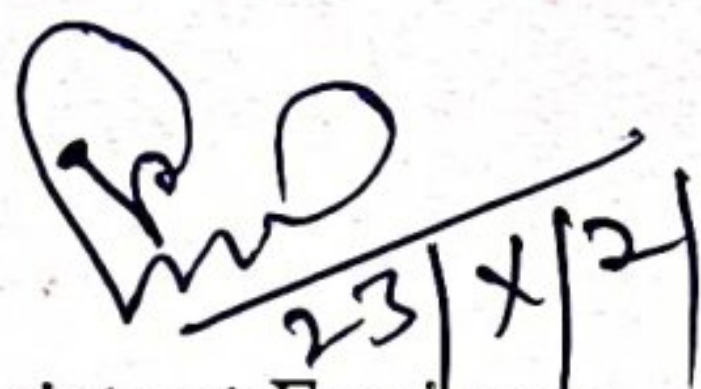
Appendix - II

sl no	Chainage	no	Length	Width (M)	Avg. Width (M)	Thickness (M)	Av. Thickness (M)	quantity (Cum)
1		1	30		5.0		0.450	67.50
2		1	30		5.0		0.450	67.50
3		1	5		5.0		0.450	11.25
4		1	17		3.8		0.450	28.69
5		1	6		2.0		0.300	3.60
6		1	8		3.0		0.300	7.20
7		1	9		3.8		0.350	11.81
8		1	2		2.0		0.175	0.70
9		1	6		3.0		0.300	5.40
10		1	2		2.0		0.175	0.70

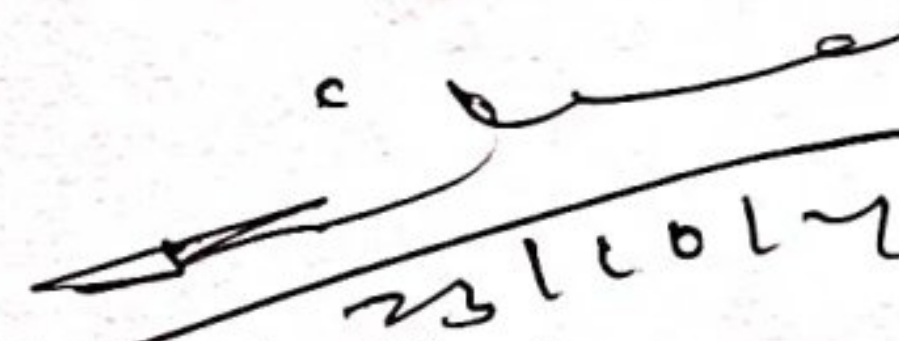
Total 204.35


23/10/21

Junior Engineer
Rural Works Department
Work Section,
Chakia


23/10/21

Assistant Engineer
Rural Works Department
Work Sub Division
Chakia


23/10/21

Executive Engineer
Rural Works Department
Works Division,
Chakia

Name of Road :- NH-28 To Ganesh Baitha House to Brita Tola Chakbara

Block :- CHAKIA

Appendix - III

sl no	Chainage	no	Length	Width (M)	Avg. Width (M)	Thicknes s(M)	Av. Thicknes s (M)	quantity (Cum)
1		1	30		5.0		0.100	15
2		1	30		5.0		0.100	15
3		1	5		5.0		0.100	2.5
4		1	17		3.8		0.100	6.375
5		1	6		2.0		0.100	1.2
6		1	8		3.0		0.100	2.4
7		1	9		3.8		0.100	3.375
8		1	2		2.0		0.100	0.4
9		1	6		3.0		0.100	1.8
10		1	2		2.0		0.100	0.4
Total								48.45

ASW
23/10/21

Junior Engineer
Rural Works Department
Work Section,
Chakia

[Signature]
23/10/21

Assistant Engineer
Rural Works Department
Work Sub Division
Chakia

[Signature]
23/10/21

Executive Engineer
Rural Works Department
Works Division,
Chakia