


(4)

Certificate




ग्रामीण कार्य विभाग

Rural Works Department, Govt of Bihar

ESTIMATE FOR EMERGENT REPAIR FOR RESTORATION OF TRAFFIC

FDR (temporary)

Bihar (बिहार) Map

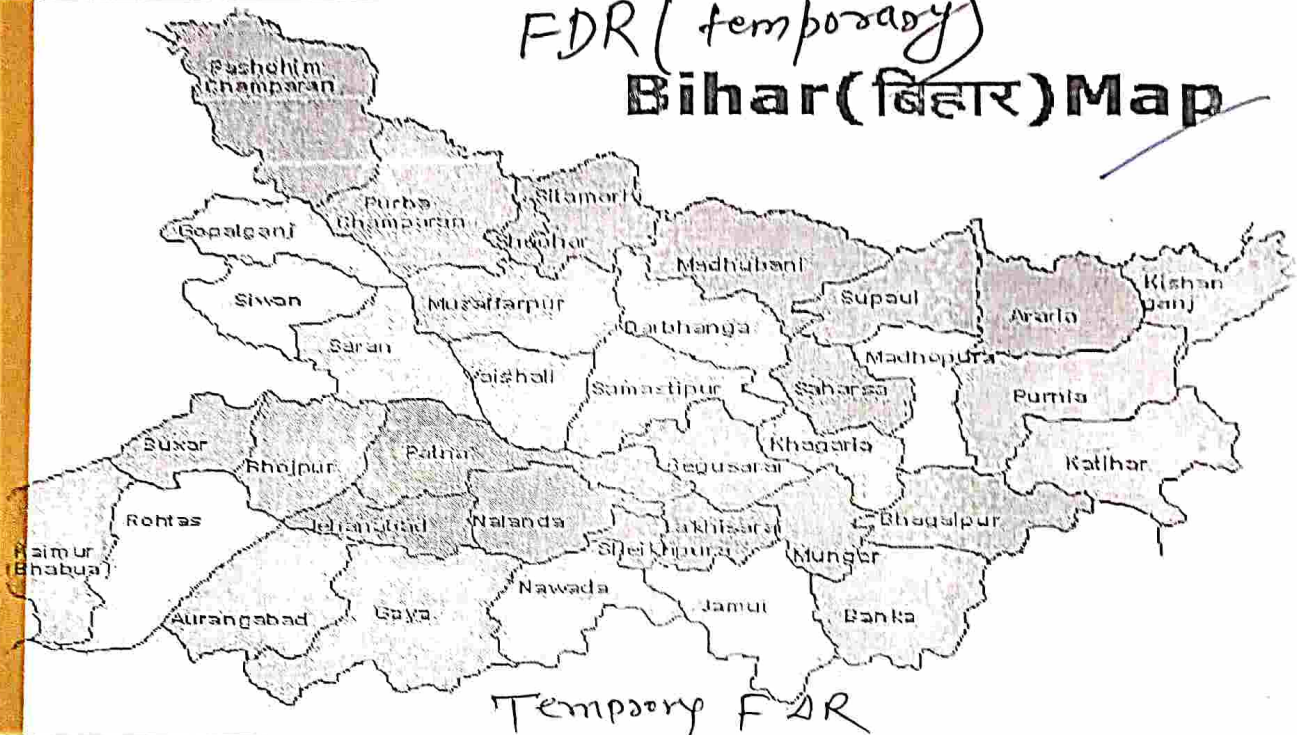

Name of the Road :-

Makhdumpur Gulabganj Road Near Dwarika High School (Ikki))

DISTRICT	:	Jehanabad	
DIVISION	:	Jehanabad	
BLOCK	:	Makhdumpur	
TOTAL COST OF RESTORATION	:	1.009	Lac

Submitted By:
Executive Engineer
RWD WORKS DIVISION
Jehanabad

GENERAL ABSTRACT OF COST

NAME OF ROAD :

Makhdumpur Gulabganj Road Near Dwarika High School (Ikkil)

DISTRICT

Jehanabad

BLOCK

Makhdumpur

DIVISION

Jehanabad

CD STRUCTURES

Sl. No.	DESCRIPTION	AMOUNT (LAKHS)
PART-A	RESTORATION COST	
1	Brick Bat Filling	0.448 0.661
2	Hume Pipe 600mm Dia	0.238 0.186
	SUB TOTAL OF Restoration	0.686 0.847
	LABOUR CESS 1% of cost	0.007 0.008
	GST 12 % of cost	0.082 0.102
	SEIGNIORAGE FEE @ 10 % on Minor Mines	0.035 0.052
	TOTAL OF Restoration	0.810 1.009

Handwritten signature
24/08/2021
RWD

Handwritten signature
24/08/21
RWD

Handwritten signature
27.11.2021
EE
RWD

Approved for Rs. 0.81 lakh
zero crore zero lakh
Eighty one thousands zero hundred only

certified copy

Handwritten signature
RWD (W) Circle
Jehanabad

Sd—
S.E.
R.W.D (W) Circle
Jehanabad

बाढ़ क्षतिग्रस्त पथों का अन्तर प्रमंडलीय जाँच प्रतिवेदन हेतु प्रपत्र।

1. निरीक्षी पदाधिकारी का नाम एवं पदनाम :- श्री राजेश कुमार यादव, कार्यपालक अभियंता, प्राथमिक कार्य एवं आवास
2. निरीक्षण की तिथि :- 24/11/24
3. पथ का नाम (शीर्ष के साथ) :- Mukhdumpur Grahagan Road Near Dwarka
4. पथ की लम्बाई :- 11.66 km ^{High School (IKKIL).}
5. कार्य प्रमंडल का नाम :- Jalandhar.
6. प्रखंड का नाम :- Mukhdumpur.
7. पथ की स्थिति :- (पूर्ण/On going) - out of maintenance.
8. पथ अनुरक्षण अवधि में है :- (Yes/No) ☒ हाँ
9. क्षतिग्रस्त भाग की लम्बाई :- 65 M.

10. क्षतिग्रस्त भाग में कराये गये कार्य का विवरणी :-
(लम्बाई x उँचाई x गहराई)

$$Qty = 35.27 m^3 \text{ (measured & sheet attached)}$$

NP-4, 600mmφ, 10.00 M.

11. Temporary Restoration में किस-किस :-
समाग्रियों का उपयोग किया गया है,
उसका विवरणी

Brick, Bats,
Hume pipe, 600mmφ,

12. अभियुक्ति :- संतोष प्रद

राजेश कुमार यादव
निरीक्षी पदाधिकारी का हस्ताक्षर
पदनाम सहित