

Detailed Estimate for Temporary Restoration of Balia Brick bhattha to Navtoliya road for the year 2021 -22.

Block - Hayaghat

Total Restoration Length ^{230.70 m} 272.60 M

R.W.D.[W] Division -Darbhanga -1

Length -0.495 KM

S.N.	item	No.	Length (M)	Width(M)	Depth (M)(AV)	Quantity (cum)
1	Providing and filling bricks bats in ditches including cost of bricks bats and labour all complete job as per specification and direction of E/I.					
	Chainage in M					
	At adjacent road	1	8.00 ✓	0.80 ✓	0.150 ✓	0.960
	22	1	14.00 ✓	$(2.50+2.60)/2$	0.225 ✓	8.033
	44	1	2.50 ✓	2.90 ✓	0.150 ✓	1.088
	67	1	6.20 ✓	2.40 ✓	0.250 ✓	3.720
	73	1	17.80 ✓	$(1.40+0.90)/2$	0.150 ✓	3.071
	91	1	19.00 ✓	$(2.30+2.50)/2$	0.225 ✓	4.382
		1	4.00 ✓	0.80 ✓	0.100 ✓	0.320
	125	1	9.00 ✓	0.80 ✓	0.150 ✓	1.080
		1	2.50 ✓	0.70 ✓	0.150 ✓	0.263
	145	1	4.25 ✓	2.30 ✓	0.200 ✓	1.955
	154	1	8.00 ✓	2.30 ✓	0.225 ✓	4.140
	173	1	1.50 ✓	0.70 ✓	0.150 ✓	0.158
		1	1.10	0.70	0.100	0.077
		1	2.50 ✓	2.40 ✓	0.150 ✓	0.900
	187	1	4.00 ✓	1.10 ✓	0.100 ✓	0.440
		1	5.10 ✓	0.90 ✓	0.100 ✓	0.459
		1	1.20 ✓	0.80 ✓	0.150 ✓	0.306
	215	1	5.50 ✓	1.80 ✓	0.200 ✓	1.980
	223	1	7.10 ✓	0.90 ✓	0.225 0.20 ✓	1.438 1.278
	236	1	6.50 ✓	2.30 ✓	0.200 ✓	1.755
	250	1	12.00 ✓	1.40 ✓	0.225 ✓	3.780
	262	1	18.00 ✓	2.40 ✓	0.225 ✓	9.720
	284	1	56.00 ✓	2.40 ✓	$(0.150+0.250)/2$	26.880
	331 (Both side)	2	10.25 ✓	0.90 ✓	0.225 ✓	4.151
		1	8.10 ✓	2.40 ✓	0.225 ✓	4.374
	Both side	2	3.80 ✓	0.75 ✓	0.225 ✓	1.283
	353	1	6.00 ✓	2.40 ✓	0.225 ✓	3.240
	359	1	5.70 ✓	0.80 ✓	0.150 ✓	0.684
	Both side	2	20.00	0.80	0.200	6.400

[Handwritten signatures and initials]

Block - Hayaghat

Total Restoration Length - 272.00 M

R.W.D.(W) Division - Darbhanga - I

Length - 0.495 KM

S.N.	Item	No.	Length (M)	Width(M)	Depth (M)(AV)	Quantity (cum)
	390	1	2.40	2.00	0.200	0.960
	Total Qty.		272.00			97.994

Total 97.994 cum

JE
04/11/21

AE
07/11/21

EE
08/11/21

RWD(W) Division Darbhanga - I

checked by

11.12.2021
J.D.

11/12/2021
AE

11/11/21
Banspur

ABSTRACT

Road Name- Temporary Restoration of Road from Balia Brick bhattha
To Navtoliya

Block- HAYAGHAT

RWD (W) DIVISION DARBHANGA -1

Road Actual Length - 0.495 KM

Efected Road Length - 272.00 M. ^{270.90 m}

S.No.		UNIT	QUANTITY	RATE	AMOUNT (Rs)
1	Providing and filling bricks bats in ditches including cost of bricks bats and labour all complete job as per specification and direction of E/I .	CUM	97.757 97.994	2004.96	196474
4	Total Amount				196474
	Add G.S.T. 12 %				23577
	Add 1 % Labor cess				1965
	Seigniorage Fee @1032.00/cum x0.10				10113
					237129

195999 = 00

23520 = 00


1960 = 00

10089 = 00


231568 = 00


J.E.

Work Section Hayaghat

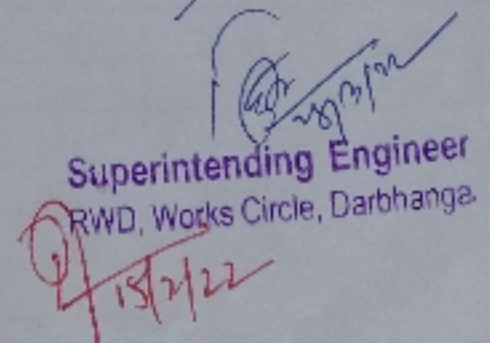

A.E.

Work Sub/Division
Hayaghat


E.E.

RWD Darbhanga -1

कार्यपालक अभियंता बेनीपुर के जाँच प्रतिवेदन के आधार पर
Technically sanctioned for Rs 231568 = 00 (Rupees Two
Lacs thirty one thousand five hundred Sixty Eight) only.


Superintending Engineer
RWD, Works Circle, Darbhanga.

Inspection Report of Flood Damage work

Name of PIUs:- RWD Works Division, Darbhanga Inspected By Benipur

Name of Block/Road:- HAYAGHAT / Balia Brick bhatta to Navtola

A. For Road

1. Damage Location Chainage:- 0 km to 0.495 km

2. Damage Length :- 270.90 m

3. Nature of Damage :- Surface Damage

4. Details of Restoration Works

i. Material being used in Restoration works:- Brick Bats

ii. Equipment's /Tools being used in Restoration works:- JCB / Tractor / Labourers

iii. Procedure taken up in Restoration works:- Laying of Brick Bats with Light Ramming

iv. Restored Length:- 270.90 m

B. For Bridge

1. Damage Location Chainage:-

2. Damage Length :-

3. Nature of Damage :-

4. Details of Restoration Works

i. Material being used in Restoration works:-

ii. Equipment's /Tools being used in Restoration works:-

iii. Procedure taken up in Restoration works:-

iv. Restored Length:-

N/A

Work Found Satisfactory

Signature of JE/AE/EE

Signature

(Name of Inspection)

Benipur

बिहार



सरकार

ग्रामीण कार्य विभाग

RURAL WORKS DEPARTMENT, GOVT. OF BIHAR.

HEAD :- FDR
STATE :- BIHAR
DISTRICT :- DARBHANGA
CIRCLE :- DARBHANGA
BLOCK :- HAYAGHAT

Name of Work :- Temporary restoration of Road From Balia brick
bhattha to Navtoliya
UNDER FDR

YEAR 2021-2022

231568 = 00

TOTAL COST OF RESTORATION

Rs. 232129=00

Submitted by :-

Executive Engineer

RWD(W) Division, Darbhanga -1