



बिहार सरकार

ग्रामीण कार्य विभाग

Rural Works Department, Govt. of Bihar

HEAD-FDR

STATE :- BIHAR

DETAILED PROJECT REPORT

DISTRICT :- Madhubani

CIRCLE :- Darbhanga

BLOCK :- Jhanjharpur

Estimate for Mortable of the Road from Kako to Ojhaul under
FDR at **Block- Jhanjharpur** in Madhubani District.

4.22083

TOTAL COST FOR MOTORABLE Rs.

~~21.57930~~ lac.

Submitted by:

Executive Engineer

RWD(W) Division, Jhanjharpur

तकनीकी प्रतिवेदन

पथ का नाम :- KAKO to Oshaul

प्राक्कलित राशि :- 2157430=00
4.22083 लाख

प्रमण्डल का नाम:- झंझारपुर

अंचल का नाम :- दरभंगा

योजना का नाम :- F.D.R-2245

प्रस्तुत प्राक्कलन विभागीय स्तर से कराये गये कार्य के आलोक काफी से अधिक

..... पथ के लिए तैयार किया गया है, जो कि बाढ़ एवं अतिवृष्टि के कारण हुए कटाव/ जलजमाव/ Wave Cut के कारण क्षतिग्रस्त हो गया था जिसके कारण आवागमन बाधित हो गया था । फलतः ग्रामीणों को काफी कठिनाईयों का सामना करना पड़ रहा था ।

यह प्राक्कलन सचिव महोदय, ग्रामीण कार्य विभाग, पटना बिहार के पत्रांक- मु0अ0- 4 (मु0) विविध (कार्य)- 23 - 60/2020- 1937 पटना, दिनांक- 07.07.2021 के आदेश के आलोक में तैयार किया गया है ।

इस प्राक्कलन में क्षतिग्रस्त हुए पथांश को ईट के टुकड़े/ मिट्टी/ स्थानीय बालु से भरकर उसका संपीड़न किये जाने का प्रावधान करते हुए कार्य संपादित किया जा चुका है ।

प्रस्तुत प्राक्कलन संपादित कार्य के समय लागू अनसूचित दर (संवेदक लाभांश छोड़कर) पर तैयार किया गया है । यह कार्य लोकहित एवं जनहित में अत्यावश्यक है । अतः इस प्राक्कलन की स्वीकृति अपेक्षित है ।



कनीय अभियंता



सहायक अभियंता



कार्यपालक अभियंता
ग्रामीण कार्य विभाग,
कार्य प्रमण्डल, झंझारपुर

Inspection Report of Flood Damage Work

Name of PIUs :- RWD Works Division, Jhanjharpur

Name of Block :- Jhanjharpur

Name of Road :- Kaka to Ajhau

A. For Road

1. Damage Location Chainage :- 3200-3400, 3400-3600
2. Damage Length :- 122 M, + 188.30 = 311.30 M
3. Nature of Damage :-
4. Details of Restoration Works
 - i. Materials being used in restoration works:- Brick bats
 - ii. Equipment's/Tools being used in Restoration works:- By Tractor-Tolly
 - iii. Procedure taken up in Restoration works:-
 - iv. Restored Length:- 178.184 m³


B. For Bridge


1. Damage Location Chainage :-
2. Damage Length :-
3. Nature of Damage :-
4. Details of Restoration Works
 - i. Materials being used in restoration works:-
 - ii. Equipment's/Tools being used in Restoration works:-
 - iii. Procedure taken up in Restoration works:-
 - iv. Restored Length:-

C. Requirement Of New CD/ Bridges

- i. Name of Road:-
- ii. Location/ Chainage:-
- iii. Type of CD Work/ Length required:-

— 3" —


Signature of JE/AE/EE


20/4/22
RR


Signature
(Name of Inspection)

Estimate for Motorability of road damaged by flood from Kako to Ojhaul For Year 2021

Length :- 2.800 km

Read :- FDR 2245

Sl No.	Item No.	Name of Item	Unit	Quantity As per Appendix - 1	Rate	Amount
1		Providing and filling brick bats in ditches/ damaged embankment including cost of brick bats and labour all complete job as per specification and direction of E/I.	Cum	909.79 178.184	2004.96	1824087.71 357251.79

357251.79

₹ 18,24,087.71

Add 12 % GST ₹ 2,18,890.53

3572.52

Add 1 % L.C ₹ 18,240.88

13,389.52


Add S. Fee (909.79 x 1063.00) x 10 % ₹ 96,710.42

422083.11

Total ₹ 21,57,929.54

422083.00

Say ₹ 21,57,930.00



Junior Engineer
R.W.D. Works Section,
Jhanjharpur



Assistant Engineer
R.W.D. Work sub Div.
Jhanjharpur

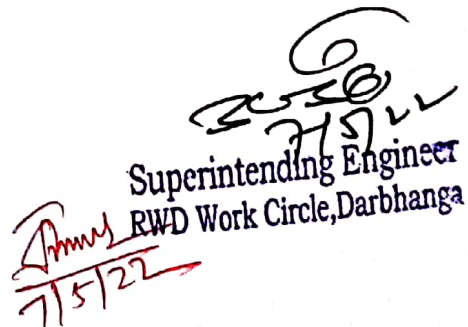


Executive Engineer
R.W.D (W) Division,
Jhanjharpur

कार्यपालक अभियंता, ग्राम को वि. जयनगर
जयपुरांत पत्रांक. 678(84) के द्वारा दिनांक. 04/05/22
के आधार पर।

Technically Sanctioned for Rs 422083.00

Four Lakh Twenty Two thousand
(Rupees) only.


Superintending Engineer
RWD Work Circle, Darbhanga
7/5/22

Name of Road :- Kako to Ojhau

Length :- 2.800 km

PMGSY

Block :- Jhanjharpur

Appendix - I

Measurement for restoration of Embankment and shoulder with Brick Bat
(Measurement in mtr.)

Chainage	Nos.		Length (In Mtr.)		Bldth (In Mtr.)		Thickness (In Mtr.)				Quantity	
ch. 3200-3400	1	x	2.00	x	(0.80+1.40)/2	x	1.10	(0.30+0.40+0.60)/3	0.43	av.	=	0.95 cum
ch. 3200-3400	1	x	30.00	x	(3.80+3.75)/2	x	3.78	(0.70+0.80)/2	0.15 0.75	av.	=	17.01 84.94 cum
ch. 3200-3400	1	x	30.00	x	(3.80+3.75)/2	x	3.78	(0.70+0.80)/2	0.15 0.75	av.	=	17.01 84.94 cum
ch. 3200-3400	1	x	30.00	x	(3.80+3.75)/2	x	3.78	(0.70+0.80)/2	0.15 0.75	av.	=	17.01 84.94 cum
ch. 3200-3400	1	x	30.00	x	(3.80+3.75)/2	x	3.78	(0.85+0.90)/2	0.15 0.88	av.	=	17.01 99.09 cum
ch. 3400-3600	1	x	30.00	x	(3.80+3.75)/2	x	3.78	(0.85+0.90)/2	0.15 0.88	av.	=	17.01 99.09 cum
ch. 3400-3600	1	x	30.00	x	(3.80+3.75)/2	x	3.78	(0.85+0.90)/2	0.15 0.88	av.	=	17.01 99.09 cum
ch. 3400-3600	1	x	30.00	x	(3.80+3.75)/2	x	3.78	(0.70+0.80)/2	0.15 0.75	av.	=	17.01 84.94 cum
ch. 3400-3600	1	x	30.00	x	(3.80+3.75)/2	x	3.78	(0.70+0.80)/2	0.15 0.75	av.	=	17.01 84.94 cum
ch. 3400-3600	1	x	22.00	x	(3.80+3.75)/2	x	3.78	(0.70+0.80)/2	0.15 0.75	av.	=	12.97 62.29 cum
ch. 3400-3600	1	x	2.80	x	0.80	x	0.80	0.45	0.45	av.	=	1.01 cum
ch. 3400-3600	1	x	8.50	x	(3.70+2.80)/2	x	3.25	0.65	0.15 0.65	av.	=	4.14 17.96 cum
ch. 3400-3600	1	x	2.00	x	0.90	x	0.90	0.80	0.80	av.	=	1.44 cum
ch. 3400-3600	1	x	2.50	x	3.20	x	3.20	0.50	0.50	av.	=	4.00 cum
ch. 3400-3600	1	x	1.50	x	1.80	x	1.80	0.40	0.40	av.	=	1.08 cum
Total qty.											=	909.79 cum

150 mm
thick
brick
bat
used

3/5/12

Junior Engineer
R.W.D, Works Section,
Jhanjharpur

27/11/22

Assistant Engineer
R.W.D, Work sub Div.
Jhanjharpur

178.184

Executive Engineer
R.W.D (W) Division,
Jhanjharpur

27/04/22
10.

27/4/22