



ग्रामीण कार्य विभाग

Rural Works Department, Govt of Bihar

BIHAR RURAL ROADS PROJECT

Bihar Rural Road Development Agency (BRRDA)

YEAR (2021 - 2022)

FDR

PART A

STATE :- BIHAR
DISTRICT :- Samastipur
BLOCK :- Mohaddinagar

NAME OF ROAD :- Detailed Estimate For Repair of Flood
Damaged in Approach road to
maksudanpur

TOTAL COST OF PROJECT :- Rs. 6.141 Lacs

SUBMITTED BY:

EXECUTIVE ENGINEER
RWD (W) DIVISION, PATORI
SAMASTIPUR

FDR
YEAR (2021 - 2022)
GENERAL ABSTRACT OF COST


Block:--Mohaddinagar

District:--Samastipur


Name of Road:--

Detailed Estimate For Repair of Flood Damaged in Approach
road to maksudanpur

SL. No.	Item of Work	Amount
A		
	TOTAL COST OF REPAIR DAMAGE	6.141 Lacs
	Sub Total= (A)	6.141 Lacs
	TOTAL cost of project	6.141 Lacs


26/10.21
Junior Engineer
RWD (w)Section ,
Mohaddinagar


26.10.21
Asstt. Engineer
RWD (w)Sub Division , Mohaddinagar


26.10.21
Executive Engineer
RWD (w) Division, Patori

SUMMARY OF COST ESTIMATE FOR THE PROJECT

NAME OF ROAD :

Detailed Estimate For Repair of Flood Damaged in Approach road
to maksudanpur
Samastipur
Mohaddinagar

DISTRICT
BLOCK

Sl. No.	DESCRIPTION	AMOUNT (LAKHS)
1	BRICK BAT	5.178
	SUB TOTAL OF PAVEMENT COST IN LACS =	5.178
	Sub Total ` :-	5.178
	12% GST on Total Amount :-	0.621
	1% Lab Cess :-	0.052
	Seigniorage Fee @ 10%	0.290
	TOTAL COST OF PROJECT IN LACS(including GST 12% & 1% Lab Cess)(A+B+C) :-	6.141

[Signature]
26.10.21

Junior Engineer

RWD (w)Section , Mohaddinagar

Assistant Engineer

RWD (w)Sub Division , Mohaddinagar

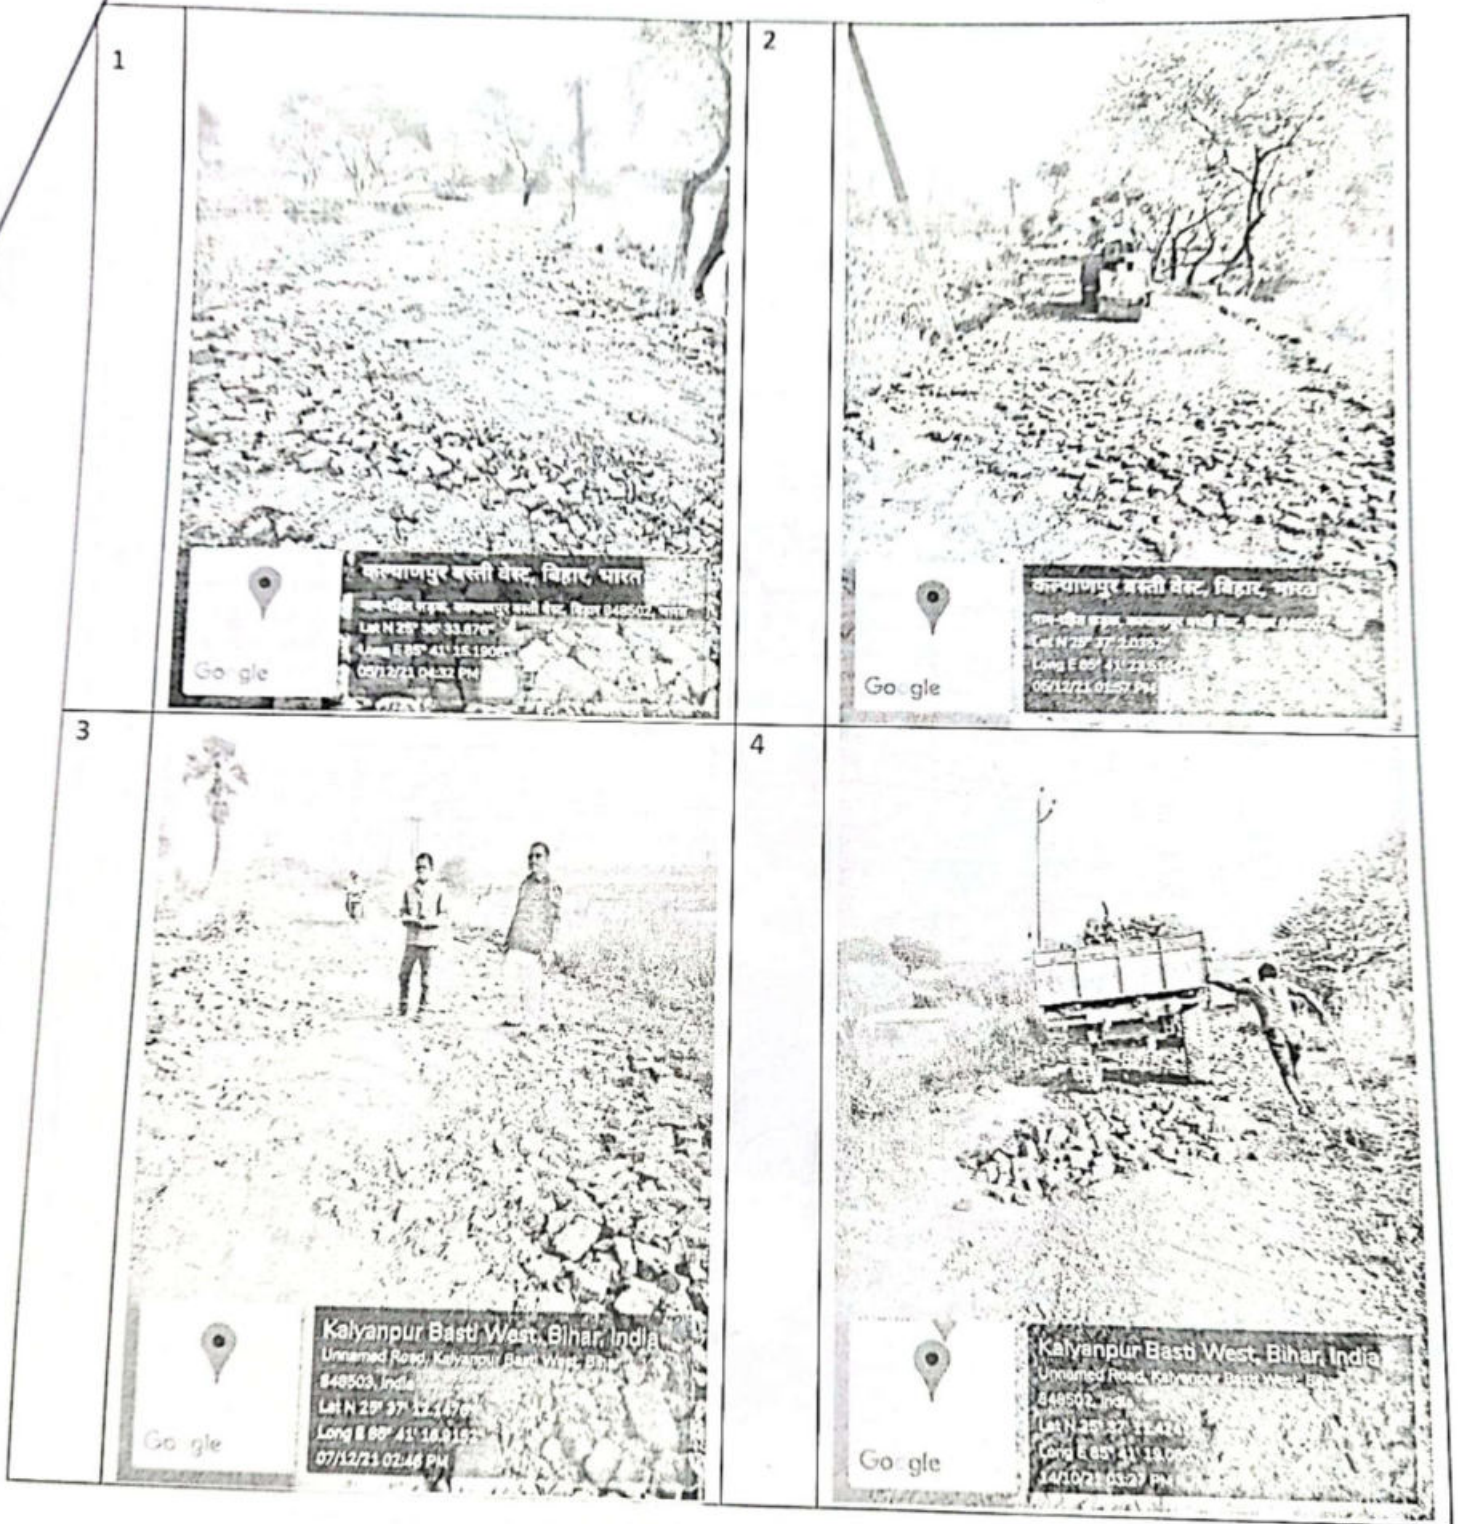
[Signature]
26.10.21
Executive Engineer
RWD (w) Division,
Patori

Provisioning & ch in carry Sanctioned for Rs 6.141 Lakh say Six Lakh Fourteen thousand one Hundred only including C.P and etc.

[Signature]
20.12.21
राजेश कुमार
राजेश कुमार
राजेश कुमार
20/12/21
T.A

SITE PHOTOGRAPH

Name of Road:-Approach road to maksudanpur



Prasanna
26.10.21
JE

U
26.10.21
A.B.

Prasanna
26.10.21

Cost Estimate for Road Work

Sl. No.	SDB SL. NO	MORD Ref. No	Description	Unit	NOS	LENGTH	WIDTH	HEIGHT	QUANTITY	RATE	AMOUNT (in Rs.)
1			Brick Bats								
			Laying Brick Bats on Prepared Soil Surface as per specifications and direction of E/L								
			Damaged Strech	cum	1.00	30.0	4.725	0.125	17.72		
			Damaged Strech	cum	1.00	30.0	5.300	0.100	15.90		
			Damaged Strech	cum	1.00	30.0	4.575	0.150	20.59		
			Damaged Strech	cum	1.00	30.0	4.850	0.150	21.83		
			Damaged Strech	cum	1.00	30.0	4.300	0.150	19.35		
			Damaged Strech	cum	1.00	30.0	5.200	0.100	15.60		
			Damaged Strech	cum	1.00	30.0	3.650	0.125	13.69		
			Damaged Strech	cum	1.00	30.0	3.650	0.100	10.95		
			Damaged Strech	cum	1.00	30.0	3.500	0.150	15.75		
			Damaged Strech	cum	1.00	17.0	3.100	0.125	6.59		
			Damaged Strech	cum	1.00	7.4	3.300	0.150	3.66		
			Damaged Strech	cum	1.00	9.0	2.200	0.150	2.97		
			Damaged Strech	cum	1.00	30.0	4.675	0.150	21.04		
			Damaged Strech	cum	1.00	25.0	5.450	0.150	20.44		
			Damaged Strech	cum	1.00	30.0	5.500	0.150	24.75		
			Damaged Strech	cum	1.00	24.3	5.500	0.150	20.05		
			Damaged Strech	cum	1.00	30.0	1.250	0.150	5.63		
			Damaged Strech	cum	1.00	30.0	1.000	0.125	3.75		
			Damaged Strech	cum	1.00	7.0	0.800	0.075	0.42		
			Damaged Strech	cum	1.00	16.0	1.067	0.125	2.13		
			Damaged Strech	cum	1.00	8.1	1.000	0.150	1.22		
			Damaged Strech	cum	1.00	9.0	1.000	0.075	0.68		
			Damaged Strech	cum	1.00	6.3	2.150	0.225	3.05		
			Damaged Strech	cum	1.00	4.7	2.200	0.225	2.33		
			Damaged Strech	cum	1.00	5.2	1.600	0.225	1.87		
			Damaged Strech	cum	1.00	2.7	2.600	0.150	1.05		
									272.98	1,896.72	5,17,766.39
									TOTAL COST IN RS. =		5,17,766.39


 Junior Engineer
 RWD (w) Section, Mohaddnagar


 Assistant Engineer
 RWD (w) Sub Division, Mohaddnagar


 Executive Engineer
 RWD (w) Division, Patoti

Sl. No.	SDB Sl. No	MORD Ref. No	Description	Unit	Quantity	Rate	Amount (In Rs.)	Total Material Required	Material Amount	Add Seigniorage Fee 10%
1	3.14	303.1	Brick Bats							
			Laying Brick Bats on Prepared Soil Surface as per specifications and direction of E/L							
			Unit = cum							
			Taking output = 2.836 cum							
		a)	Material							
			Brick Bats	Cum	2.832	1063.000	3,010.42			
			Cost for 2.836 cum = a				3,010.42			
			Rate Per Cum = (a)/2.836 =	Cum			1,061.50			
			Total Cost =	Cum			1,061.50	272.93	2,09,768.33	28,976.83
10% Seigniorage Fee :-										28,976.83

20.5.2018
 26.10.18
 20.10.18

20.10.18
 20.10.18

कार्यपालक अभियंता का कार्यालय
ग्रामीण कार्य विभाग, कार्य प्रमंडल, बलिया

पत्रांक 01, कैप पटोरी

दिनांक 16/12/2

प्रेषक:-

कार्यपालक अभियंता
ग्रामीण कार्य विभाग
कार्य प्रमंडल, बलिया

सेवा में,

कार्यपालक अभियंता,
ग्रामीण कार्य विभाग,
कार्य प्रमंडल, पटोरी

विषय:-

एफ.डी.आर. योजना की जाँच के संबंध में।

प्रसंग:-

आपका पत्रांक 1514 दिनांक 19.11.2021

महाशय,

उपरोक्त विषय के संबंध में कहना है कि प्रासंगिक पत्र में उल्लेखित पथों की जाँच कर ली गई। जाँचोपरांत प्राक्कलन लौटाई जाती है। व्यौरा निम्नवत् है:-

क्रम सं०	पथ का नाम	प्रखंड	लंबाई कि०मी० में	प्राक्कलित राशि लाख में	अभियुक्ति
01	गढ़सिसई चौक से भागीरथ स्थान पीएचसी	विद्यापतिनगर	1.06	2.24	
02	टुनटुन राय से एमएमजीएसवाई	विद्यापतिनगर	1.24	7.95	
03	पीडब्लुडी रोड से सरारी माधोपुर	मोहनपुर	2.10	4.861	
04	दक्षिणी डुमरी पंचायत अंतर्गत डुमरिया बाँध से चापर दुर्गा स्थान होते हुए चापर काली स्थान	मोहनपुर	0.850	6.974	
05	विशनपुर बेरी मरगंग से मटिऔर चमार टोली काली मंदिर दो गाछी तक	मोहनपुर	2.110	4.907	
06	मोहनपुर मोहिउद्दीननगर पीडब्लुडी रोड दशहरा सहेंद्र राय के घर से सरहद सीमान भाया रविदास टोला	मोहनपुर	3.85	4.400	
07	मोहनपुर प्रखंड गेट से खनजीवा तक	मोहनपुर	2.10	3.137	
08	एस.एच.टी 01 से जौनापुर रूदार	मोहनपुर	4.60	4.036	
09	पटोरी प्रखंड के आदर्श मध्य विद्यालय हसनपुर सूरत घाट पर आदर्श मध्य विद्यालय हसनपुर सूरत के नजदीक उच्च स्तरीय पुल	पटोरी	03x16.50m	9.44	
10	टी 02 से रूपौली चौसीवा	पटोरी	1.028	2.54	
11	पटोरी मदुदाबाद पीडब्लुडी रोड से ईस्माईलपुर	पटोरी	2.570	3.919	
12	पीडब्लुडी सड़क से प्यारपुर होते हुए जोड़ी पोखर तक	पटोरी	1.30	4.680	
13	चकलालशाही जंदाहा आरईओ रोड कौआ चौक से दरवा	पटोरी	2.90	8.043	
14	वजरंगवली से बांवे रीगान भाया करतूरवा विद्यालय	पटोरी	2.01	4.614	
15	वाकरपुर चौक से वाकरपुर महादलित टोला	मोहिउद्दीननगर	0.450	1.787	
16	रमगामा विकु से ब्रह्मपुरा	मोहिउद्दीननगर	1.421	3.108	
17	पहुँच पथ से मधुसूदनपुर	मोहिउद्दीननगर	5.10	6.141	
18	मोहिउद्दीननगर बाजार से कुरसाहा नहर	मोहिउद्दीननगर	1.88	2.380	

कृ०प०उ०

	पथ का नाम	प्रखंड	लंबाई कि०मी० में	प्राक्कलित राशि लाख में	अभियुक्ति
9	मनहर से बाजितपुर सीमान	मोहिउद्दीननगर	1.365	1.439	
20	थाना चौक मोहिउद्दीननगर से कन्हौली होते हुए नवादा हेमनपुर पीएमजीएसवाई सड़क तक	मोहिउद्दीननगर	1.450	0.721	
21	राहेपुर मोड़ से तैतारपुर भाया मनियर टोला महम्मदीपुर	मोहिउद्दीननगर	4.80	5.935	
22	मोहिउद्दीननगर के टाँड़ा गाँव होते हुए पंचायत भवन तक	मोहिउद्दीननगर	2.00	7.264	
23	भूइया स्थान पासवान टोला से एस.एच. रोड	मोहिउद्दीननगर	0.50	2.329	
24	मस्तलीपुर कासिमचक होते हुए खनुआ घाट	मोहिउद्दीननगर	1.372	3.293	
25	आनंदगोलवा से रजैसी	मोहिउद्दीननगर	0.737	1.369	
26	कल्याणपुर बस्ती से हरिजन टोला	मोहिउद्दीननगर	1.935	0.727	
27	करीमनगर दुर्गा मंदिर से मोगलचक यादव टोला	मोहिउद्दीननगर	1.00	1.229	
28	मोहिउद्दीननगर से विशनपुर बेरी	मोहिउद्दीननगर	7.20	0.406	
29	मस्तलीपुर से सरहद भैरो	मोहिउद्दीननगर	1.8	0.440	

अनु०- उक्त सभी पथों का प्राक्कलन (29 अदद)

विश्वासभाजन

कार्यपालक अभियंता
ग्रामीण कार्य विभाग, कार्य प्रमंडल, बलिया

Inspection Report for Flood Damage Work

Date.: 16-12-21.....

1. Name of PIUs – Executive Engineer, R.W.D., Works, Division, Patosi

2. Name of Block – mohiudmagar

3. Name of Road/Bridge – Approach Road to madhusambar

A. for Road

1. Damage Location/Chainage : ch. 0 to ch. 2.40 Km

2. Damage Length : 2.40 Km

3. Nature of Damage : Surface / Flank Damage

4. Details of Restoration Works :

i. Material being used in Restoration works : — Brick Bat

ii. Equipments/Tools being used in Restoration Works :

iii. Procedure taken up in Restoration works :

iv. Restored Length :

B. for Bridge

1. Damage Location/Chainage :

2. Damage Length :

3. Nature of Damage :

4. Details of Restoration Works :

i. Material being used in Restoration works :

ii. Equipments/Tools being used in Restoration Works :


iii. Procedure taken up in Restoration works :

iv. Restored Length :


2.40 Km
Not applicable

N.A.


16-12-21
J.E.


16/12/21
A.E.


16/12/21
Executive Engineer,
R.W.D. Works Division,
.....


16/12/21
Signature
(Name of Inspector)