




ग्रामीण कार्य विभाग

Rural Works Department, Govt of Bihar

DETAILED PROJECT REPORT FOR FDR

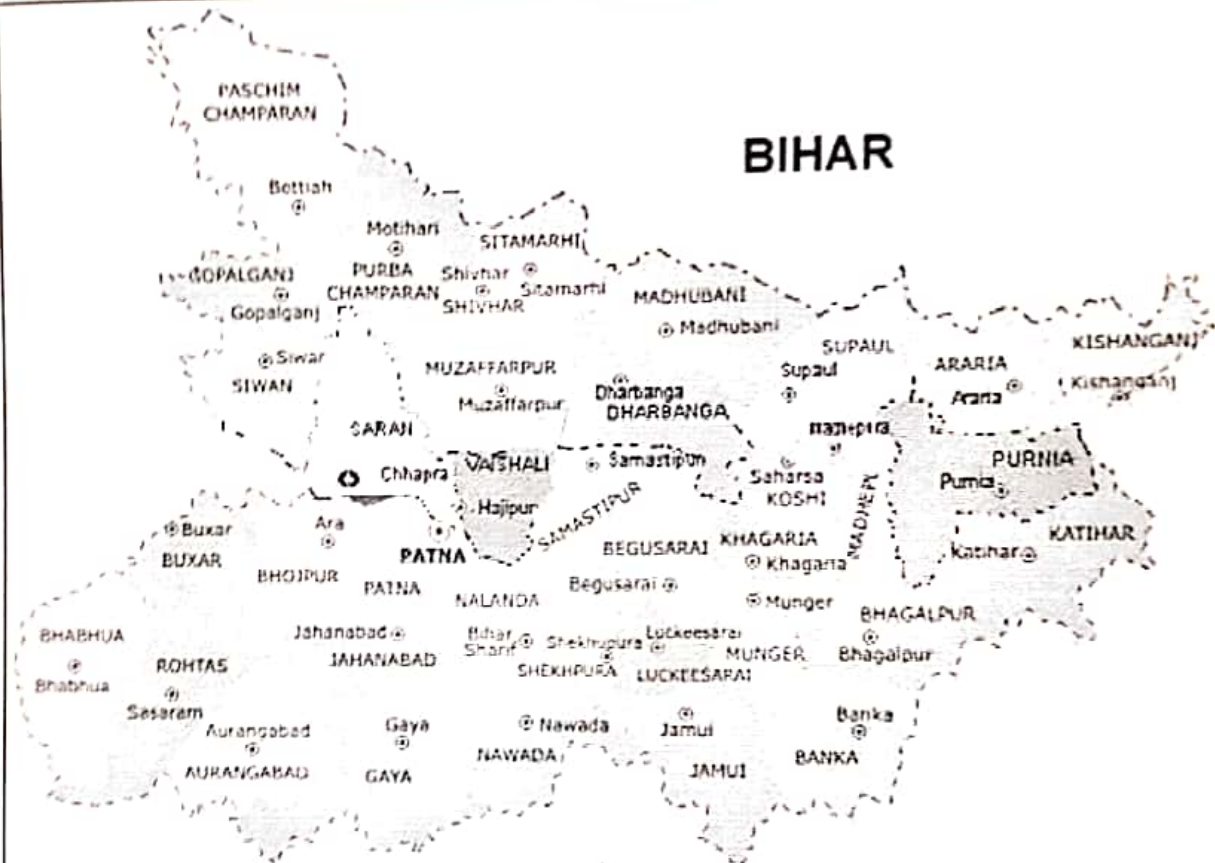

Name of the Road :-		Kodariya Mango High School to Jagdhishpur Via PMGSY Road		
DISTRICT		Muzaffarpur		
DIVISION		Muzaffarpur West		
BLOCK		Paroo		
TOTAL LENGTH OF ROAD		:	2.350	KM
CONSTRUCTION COST		:	1.048 1.007	Lac

Submitted By :-
Executive Engineer
RWD Work Division, Muzaffarpur West

प्रतिवेदन

कार्य का नाम:- Kodariya Mango High School to Jagdishpur via P.MGSY
Road पथ में अप्रत्याशित बाढ़/अतिवृष्टि से क्षतिग्रस्त पथ में
यातायात चालू करने हेतु आपातकालीन मरम्मत कार्य।

प्रखण्ड- पारस
वित्तीय वर्ष - 2021-22
प्राक्कलित राशि - Rs. 1.007 (लाख)

प्रस्तुत प्राक्कलन जिसकी प्राक्कलित राशि 1.007 लाख है, Kodariya Mango
H.S. to Jagdishpur, प्रखण्ड- पारस में यातायात बहाली हेतु आपातकालीन मरम्मत के
लिए तैयार किया गया है।

अभियंता प्रमुख, ग्रामीण कार्य विभाग, बिहार पटना के पत्रांक 4589 दिनांक 13/11/2021 द्वारा
दिये गये निर्देश के आलोक में उक्त पथ के क्षतिग्रस्त पथ में Brick Bats & Local Sand भरकर पथ को चालू
करने का प्रावधान किया गया है। प्राक्कलन वर्तमान चलू अनुसूचित दर पर तैयार किया गया है। इसकी
घटनोत्तर स्वीकृति अपेक्षित है। पथ की अवस्था 17.11.21 के दर्ज है, प्रतिफलान,

15/11/21
कनीय अभियंता

15/11/2021
सहायक अभियंता

15/11/21
कार्यपालक अभियंता
ग्रामीण कार्य विभाग
कार्य प्रमंडल:-

Inspection Report for Flood Damage Work

Date:- 02.12.2021

1 Name of PIUs :- E.E, R.E.V.D. Taluza/Hatpur West.

2 Name of Block/Road :- Parod/Kalanja Mangro H.S. to Jagdishpur via P. Nagar Rd

(A) For Road:

1. Damage Location/Chainage :- 225 M.
2. Damage Length :- 12.50 M.
3. Nature of Damage :- Road Cully by flood & heavy rain
4. Details of Restoration Works :-
 - (i) Material being used in Restoration works:- Brick Ball-47.25 M³, Sand-5.48 M³
 - (ii) Equipment's/Tools being used in Restoration works:- Road roller,
 - (iii) Procedure taken up in Restoration works:
 - (iv) Restored Length :- 12.50 M.

(B) For Bridge:

1. Damage Location/Chainage :-
2. Damage Length :-
3. Nature of Damage :-
4. Details of Restoration Works :-
 - (i) Material being used in Restoration works:-
 - (ii) Equipment's/Tools being used in Restoration works:-
 - (iii) Procedure taken up in Restoration works:-
 - (iv) Restored Length :-

The work found satisfactory

N.A

work found satisfactory

Signature of JE/AE/EE
02.12.21

Signature
02.12.21

(Name of Inspection)

GENERAL ABSTRACT

Name of Road	Kodariya Mango High School to Jagdhishpur Via PMGSY Road
--------------	--

District Muzaffarpur

Block	Paroo
-------	-------

Division Muzaffarpur West

Length of Road (in Km)

2.350 Km

SI. No.	DESCRIPTION	AMOUNT (LAKHS)
1	Earthwork	0.000
2	Brick Bats	0.976
3	Sand Filling	0.030
4	Sand bag	0.000
5	H.P.	0.000
	SUB TOTAL	1.007
	GRAND SUB TOTAL	1.007

RWD

RWD

RWD

At Par S.E. RWD (W) Circle Muz
Letter No 1178 Dated 01/10/2021
Estimate has been verified by inspecting
E.E. RWD. (W) Division

Technically Sanctioned for Rs. 1.007.49 (Rs. one lac seven hundred) only (provisionally)

Superintending Engineer
Rural Works Department
Work Circle: Muzaffarpur.