



ग्रामीण कार्य विभाग

Rural Works Department, Govt of Bihar

DETAILED PROJECT REPORT FOR MOTRABLE REPAIRING OF ROAD

F.D.R. PART - MOTRABLE RESTORATION

PMGSY PATH KHURIYAL SINGHPUR LAL PAHAR TOLA

DETAILED ESTIMATE OF F.D.R. MOTRABLE REPAIRING ROAD

ROAD LENGTH	0 TO 1100	
DISTRICT	KATIHAR	
BLOCK	AZAMNAGAR	
DIVISION	MANIHARI	
TOTAL LENGTH OF ROAD	1.100	KM
TOTAL COST OF F.D.R. PART - A	Rs. 3.307	Lacs
ADD G.S.T @ 12%	Rs. 0.397	Lacs
ADD Labour Cess @ 1%	Rs. 0.033	Lacs
ADD Seigniorage Fee @ 10%	Rs. 0.180	Lacs
TOTAL COST OF RESTORATION WORK In Rs.	Rs. 3.917	Lacs

SUBMITTED BY
The Executive Engineer,
Works Division, Manihari

प्रतिवेदन

प्रस्तुत प्राक्कलन ग्रामीण कार्य विभाग कार्य प्रमण्डल मानिहारी अन्तर्गत आजमनगर प्रखंड
थ PMWSY पंच सुरियाल सिंहपुर कालपहाड़ रोड़ा (.....) जो
गीय Online Morititring System MIS पर अपलोड है के बाद 2021 से क्षतिग्रस्त हो जाने के
ग यातायात लायक Moterale हेतु बनाया गया है। इस कार्य को करने का निर्देश ग्रामीण कार्य
ग, बिहार सरकार के पत्रांक:-मु0अ0-4(मु0) विविध (कार्य) -23-291/2019-4275/पटना, दिनांक-
'10/2021 से प्राप्त है। इस पत्र से Real time Geotagged Photographs को कार्य के दौरान
लोड करते हुए (Moterale) कार्य कराना सुनिश्चित करने का निर्देश प्राप्त है।

1 निर्देश के आलोक में 2021 अतिवृष्टि/बाढ़ उपधार से आए बाढ़ के करण इस पथ के
वे के क्षतिग्रस्त हो जाने से सुरक्षित आवागमन हेतु Moterale कार्य कराया गया है। MIS में
लोडेड फोटो दिनांक का Lat/Long के साथ लिया गया है। नेपाल तराई से
गलनेवाली इस नदी के तेज धार से इस पथ में कटाव की स्थिति बनी। मोटरेबल कार्य में
अश्यकतानुसार मिट्टी भराई, लोकल बालु भराई, खाली सिमेंट बैग में लोकल बालु भरकर, बॉस का
ल, चचरी, बॉस का रनर, ह्यूम पाइप एवं ब्रिक बैट का इस्तेमाल किया गया है। निर्देशानुसार कराए
कार्य कि Geotagged Photographs Real Time के साथ MIS पर उद्धत है। MIS की
वाप्रति, अपलोडेड फोटोग्राफ की छायाप्रति, दर विश्लेषण एवं विभागीय आदेशों की छायाप्रति प्राक्कलन
संलग्न की जा रही है। प्राक्कलन में प्रयुक्त दर अद्यतन है।

प्राक्कलन की यथाशीघ्र अनुमोदन अपेक्षित है ताकि अग्रेतर कार्रवाई की जा सके।



नीय अभियंता
ग्रामीण कार्य विभाग

कार्य प्रशाखा, आजमनगर



सहायक अभियंता
ग्रामीण कार्य विभाग

कार्य अवर प्रमंडल, आजमनगर



कार्यपालक अभियंता
ग्रामीण कार्य विभाग

कार्य प्रमंडल, मानिहारी

Inspection Report for Flood damage work

Date:

1. Name of PIUs- EE RWD MANIHARI

2. Name of Block/Road- Azamnagar

A. For Road Pongsy Path Khunihal Singhpur 1st Puhar Toki

1. Damage Location/Chainage : at, 50, 75, 90, 100 at cheniye

2. Damage Length : 40.5 M

3. Nature of Damage : side cutting due to flood

4. Details of Restoration :
i Material being used in Restoration Bricks/batts

ii Equipment/Tools being used in Restoration works: Tractor

iii Procedure taken up in Restoration works : Manual

iv Restored Length : 40.5 m

B. For Bridge

1. Damage Location/Chainage :

2. Damage Length :

3. Nature of Damage :

4. Details of Restoration :

i Material being used in Restoration :

ii Equipment/Tools being used in Restoration works:

iii Procedure taken up in Restoration works :

iv Restored Length :

21/11/24
JE

Signature of JE/AE/EE

21/11/24

21/11/24


Signature

(Name of Inspector)

GENERAL ABSTRACT OF COST FOR MAINTENANCE OF ROAD

NAME OF ROAD : PMGSY PATH KHURIYAL SINGHPUR LAL PAHAR TOLA
DISTRICT KATIHAR
DIVISION MANIHARI
BLOCK AZAMNAGAR
LENGTH OF ROAD (IN KM) 1.100

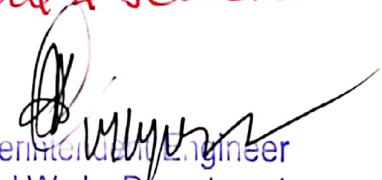
Sl. No.	ITEM OF WORK	AMOUNT (LAKHS)
1	EARTH WORK	0.000
2	HUME PIPE	0.000
3	BRIKCK BAT	3.307
4	SAND BAGS	0.000
5	BAMBOO WORK	0.000
6	STEEL DRUM SHEET	0.000
TOTAL COST OF PROJECT =		3.307
Add G.S.T. @ 12%		0.397
Add Labour Cess @ 1%		0.033
Add Seigniorage Fee @ 10%		0.180
Total Cost of Restoration Work =		3.917


J.E.
RWD


A.E.
RWD


J.E.
RWD

Technically Sanctioned for Rs. 3.917 lacs (Rupees.
Three lacs ninety one thousand & seven
hundred) only.


Superintendent Engineer
Rural Works Department
Works Circle, Purnea