RURAL WORKS DEPARTMENT





GOVERNMENT OF BIHAR

NAME OF ROAD:-

RESTORATION OF ROAD FROM TURSAND TO MANJHUA

DIVISION:-

R.W.D, WORKS DIVISION, FORBESGANJ

CIRCLE:-

R.W.D, WORK CIRCLE, KISHANGANJ

BLOCK:-

FORBESGANJ

ESTIMATED COST

428272.00

Inspection Report for Flood Damage Work

EE RWD Forbesgeig 1.Name of PIUs 2. Name Of Block / Road Forbugay Torsand to mayograpa A. For Road - 24,262899, 87,240444, 1.Damage Location / Chainage 35m 2.Damage Length Glood damage depth up to 5 m 3. Nature Of Damage 4. Details Of Restoration Local sard, Bebag, brick but, bombu lile min i) Material Being Used In Restoration : Practor, ICB, vollar, barba piles mades : Fillig all Cuts Property in damagearen ii) Equipment / Tools Being Used In Restoration Works iii) Procedure Taken Up In Restoration Works 35 m iv) Restored Length B. For Bridge 1. Damage Location / Chainage 2.Damage Length 3. Nature Of Damage 4 Details Of Restoration i) Material Being Used In Restoration ii) Equipment / Tools Being Used in Restoration Works iii) Procedure Taken Up In Restoration Works iv) Restored Length

Signature of JE / AE / EE

(Name Of Inspector)

प्रतिवेदन

प्रस्तुत प्राक्कलन ग्रामीण कार्य विभाग, कार्य प्रमंडल, फारबिसगंज अंतर्गत

प्राक्किं
प्रखंड के पथ के किंद्र के किंद्र के किंद्र के किंद्र के अपलोड़ के बाढ़ 2021 से क्षतिग्रस्त हो जाने के कारण यातायात लायक Motorable हेतु बनाया गया है। इस कार्य को कराने का निर्देश ग्रामीण कार्य विभाग, बिहार सरकार के पत्रांक—मु0अ0—4(मु0) विविध कार्य—23—60/2020—1937/पटना, दिनांक—07.07.2021 से प्राप्त है। इस पत्र के Real time geo-tagged Photograph को कार्य के दौरान अपलोड़ करते हुए (Motorable) कार्य कराना

प्राक्कलन की यथा शीध्र अनुमोदन अपेक्षित है ताकि अग्रेतर कार्रवाई की जा सके।

Alm 12/11/21

सुनिश्चित करने का निर्देश प्राप्त है।

कनीय अभियंता ग्रामीण कार्य विभाग कार्य प्रशाखा— सहियक अभियंता ग्रामीण कार्य विभाग कार्य अवर प्रमंडल- कार्यपालक अभियंता ग्रामीण कार्य विभाग कार्य प्रमंडल,फारबिसगंज

Abstract of Cost

Name of Work: Estimate for Repairing/Restoration/Making Motorable Roads
Damaged during flood in JULY 2020 in ARARIA District

Name of Road:

RESTORATION OF ROAD FROM TURSAND TO MANJHUA

Block: FORBESGANJ

District: ARARIA

Divison: RWD, Works Division, FORBESGANJ

Circle: RWD, Work Circle, Kishanganj

No.	Description	Unit	Quantity (m3)	Rate (Rs)	Amount (Rs)
1	Filling of local sand obtained from river bed, watering & ramming, all complete job as per specification & direction of Engineer-in-charge.				
		Cum	208.25	627.77	130733.43
2	Labour for cutting 62mm to 75mm dia bamboo piles to size and making shoes & driving by jet machine etc. all complete job as per specification & direction of Engineer-in-Charge.				
		Mtr.	420.00	75.86	31860.61
3	Labour for fitting & fixing 62mm to 75mm dia bamboo runners in position at every vertical pile with 150 mm long nails or 38 swg G.I wire including cost of G.I wire or nails etc all complete job as per specification & direction of Engineer-in-Charge.				
		Mtr.	210.00	40.06	8412.72
4	Supplying of EC bag, filling of local sand, stitching and placing in position as per the direction of Engineer-in-charge.				
		Each	5191.31	37.35	193878.21
5	Supply and Carriage of brick bats upto 8 km breach and placing in breaches and lying of bats, all complete job.				

ADD 12.00 %GS SAY TOTAL AMOUNT				45886.00 428272.00
TOTAL AMOUNT				382386.00
	meter	0.00	5251.25	0.00
6 Supply, laying and Carriage of of hume pipe 1000 mm dia (HPC), all complete job.				
	Cum	9.45	1851.91	17500.58

RWD WORKS DIV. FORBESGANJ

RWD WORKS DIV.FORBESGANJ

Ref. E.E. Letter No. 1561 (3150) Dt. 28/4/22

RWD WORKS DIV. FORB

Technically Sanctioned For Rs. 4.28, 25

(Rupees four last fwenty eight thousand him hundred Seventy two)Only

Engine Norts Circle, Kishan

Abstract of Cost

Name of Work: Estimate for Repairing/Restoration/Making Motorable Roads
Damaged during flood in JULY 2019 in ARARIA District

Name of Road:

RESTORATION OF ROAD FROM TURSAND TO MANJHUA

Block:FORBESGANJ

District: ARARIA

Divison: RWD, Works Division, FORBESGANJ

Circle: RWD, Work Circle, Kishanganj

l No.	Description	Unit	Quantity (m3)	Rate (Rs)	Amount (Rs)
1	Filling of local sand obtained from river bed, watering & ramming, all complete job as per specification & direction of Engineer-in-charge.	1.2			
		Cum	208.25	627.77	130733.43
2	Labour for cutting 62mm to 75mm dia bamboo piles to size and making shoes & driving by jet machine etc. all complete job as per specification & direction of Engineer-in-Charge.			1, 1	
		Mtr.	420.00	75.86	31860.61
	Labour for fitting & fixing 62mm to 75mm dia bamboo runners in position at every vertical pile with 150 mm long nails or 38 swg G.I wire including cost of G.I wire or nails etc all complete job as per specification & direction of Engineer-in-Charge.			ig t	
		Mtr.	210.00	40.06	8412.72
	Supplying of EC bag, filling of local sand, stitching and placing in position as per the direction of Engineer-in-charge.				
		Each	5191.31	37.35	193878.21
l	Supply and Carriage of brick bats upto 8 km breach and placing in breaches and lying of bats, all complete job.			<i>57.</i> 135	155076.21
		Cum	9.45	1851.91	17500.58
	Supply,laying and Carriage of of hume pipe 1000 mm dia (HPC), all complete job.			1031.71	17300.36
		meter	0.00	5251.25	0.00
		Total Ar	nount (in Rs)	=	382385.56

RWD WORKS DIV.

RWD WORKS DIV. FORBESGANJ

C. Tall

RWD WORKS DIV. FORBESC

Detailed Estimate

Name of Road:

RESTORATION OF ROAD FROM TURSAND TO MANJHUA


0.	Items of Works	Nos.	L (m)	B (m)	D (m) IN (Av.)	Quantity (m3)
			City			
	ing of local sand obtained from river bed,					
	ing of local sand obtained from tering & ramming, all complete job as per scification & direction of Engineer-in-charge.					
		2	35.00	(1.8+1.7)/2	(`1.6+1.8)/2	208.25
		1	0.00	(5.5+6.4)/2	(1.6+1.0)/2	0.00
		1	0.00	1	TOTAL=	208.25
					Total Qty =	208.25
pil	pour for cutting 62mm to 75mm dia bamboo es to size and making shoes & driving by jet achine etc. all complete job as per ecification & direction of Engineer-in-Charge.					
sp	ecification & direction of Engineer in Grange	2	35.00	3.00	2.00	420.00
		2	0.00	3.00	2.00	0.00
					Total Qty =	420.00
ba pil in co	bour for fitting & fixing 62mm to 75mm dia mboo runners in position at every vertical le with 150 mm long nails or 38 swg G.I wire cluding cost of G.I wire or nails etc all mplete job as per specification & direction of agineer-in-Charge.					
1	ignicel in charge.	2	35.00	3.00		210.00
		1	0.00	3.00		0.00
						210.00
				7 10	Total Qty =	210.00
st	upplying of EC bag, filling of local sand, titching and placing in position as per the irection of Engineer-in-charge.					
a	rection of Engineer-in-charge.	2	35.00	(0.8+1.2)/2	(2.8+1.4)/2	147.00
		1	0.00	(0.8+1.2)/2		0.00
	y y				TOTAL=	147.00
			Total N		253.45X35.315	
			_	SA	Y NO OF BAGE	5191
b	upply and Carriage of brick bats upto 8 km reach and placing in breaches and lying of oats, all complete job.					5
١	au, an complete job	2	35.00	0.90	0.15	9.45
					Total Qty.	9.45
4 S	Supply, laying and Carriage of of hume pipe			1		T
1	000 mm dia (HPC), all complete job.		0.00	2.50	T. (-1.5)	0.00
	/ /				Total Qty.	= 0.00

RWD WORKS DIV.

RWD WORKS DIV, NARPATGANJ


RWD WORKS DIV. FORBESGANJ

तीरसंड से मंडुआ

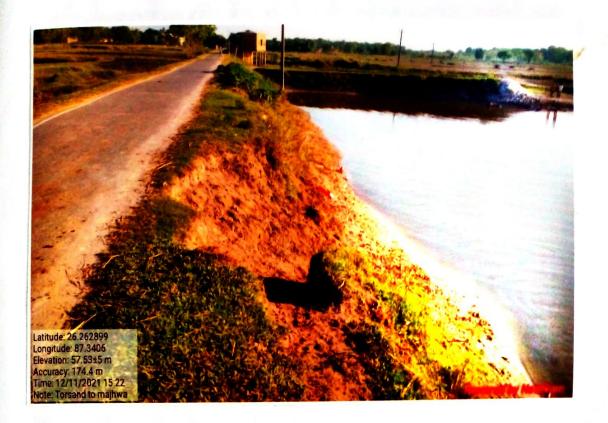





June 18 121 / 18 18 19 1

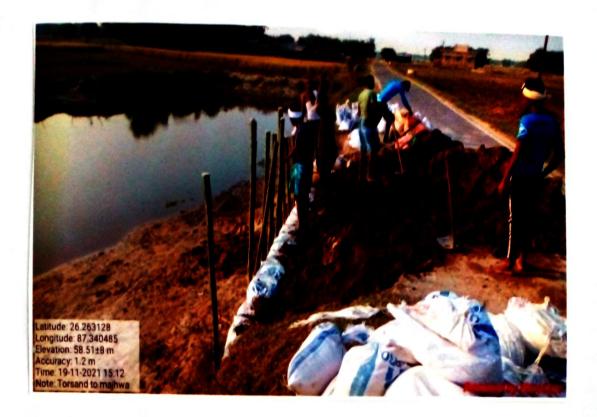




- April 18 20 2

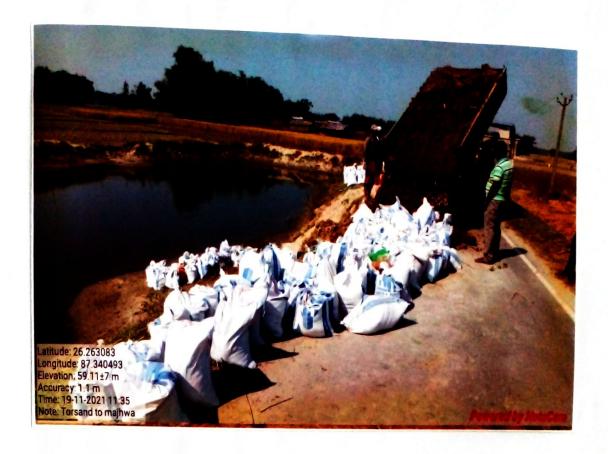

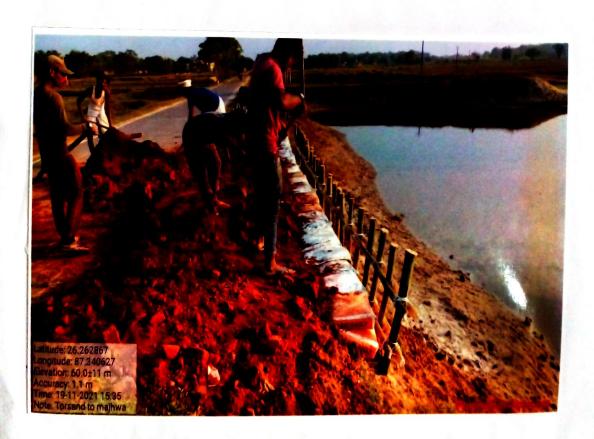

Alex 18 8 22



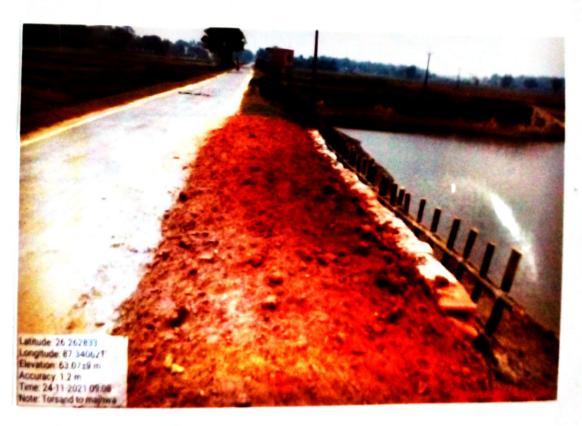

Just 8/21