



FLOOD DAMAGE REPAIR (FDR)
YEAR 2021-22

FOR T/A

DISTRICT :- **BEGUSARAI**
BLOCK :- **MANSURCHAK**

CONSTRUCTION COST	:-	Rs. 1.013 Lac
TOTAL COST	:-	Rs. 1.013 Lac

MR YOJNA

NAME OF ROAD :- FLOOD DAMAGE REPAIR PMGSY ROAD
DASRATHPUR HOUSE OF GANGA GIRI TO
MMGSY ROAD SATBHAIYA TOLA

TOTAL LENGTH	:	1.245 KM
LENGTH DAMAGE DUE TO FLOOD	:	0.082 KM.

SUBMITTED BY:
EXECUTIVE ENGINEER
R.W.D. WORKS DIVISION, TEGHRA

Road Dasrathpur house of ganga
giri to MMGSY Road Satbhaiya

Name of Road :- tola

Year 2021-22

District :- Begusarai
Block :- Mansurchak

GENERAL ABSTRACT OF COST

Sl No.	Item of Work	Amount (in Rs.)
		As Per Estimate
1	COST OF FDR	87,851.00
2	Add L.C. @1%	879.00
3	ADD GST @ 12%	10,542.00
	Sub Total Rs. :--	99,272.00
	Add S.F. @ 10% on Material Rate	1,985.00
	Total Rs. :--	1,01,257.00
	Say Rs. :--	1,01,300.00

[Signature]
J.E.

RWD. Teghra

[Signature]
A.E.

RWD. Teghra


[Signature]
E.E.

RWD. Teghra

200 Rs. 1000/- *Some time* *for Rs 1,01,300 = 00 say one lakh*
one thousand three hundred only including O.H.C.
and exp.

[Signature]
10.12.21
बलाकच बा. -
बाबोब कावे विभा.
कावे वंभत, प्रबलसोफ
10.12.21


SDB SL .NO	MO RD Ref .No	Description	Unit	NOS	LENG TH	WIDT H	HEIG HT	QUANT ITY	RATE	AMOUNT (in Rs.)
1		Supplying of empty cement bag (sythetic should be old but in good condition of 1.2 cafcapacing) with carriage,labour cost of roll nylon for streching of empty bag through local sand,laving,stacking								
		Qty From Calculation Sheets	NOS	102.5	X	25	=	2562	34.29	87851
2		Providing brick bats including ,spreading,laying, hand packing with CI hammers in layers has exceeding 75mm thick including cost of light barriers,danger equal,choukidar,taxes,royalty etc all complete job, as per specifications and								
		Qty From Calculation Sheets	Cum					0.00	1896.72	0.00
		Total						=		87,851.00


J.E.

RWD. Teghra


A.E.

RWD. Teghra


E.E.

RWD. Teghra

ABSTRACT OF QUNTITY (QUANTITY CALCULATION SHEET)

SL. NO.			NO.	LENGTH	WIDTH	DEPTH		QUANTITY	
1.	Supplying of empty cement bag (sythetic should be old but in good condition of 1.2 cafcapacing) with carriage,labour cost of roll nylon for streching of empty bag through local sand,laying,stacking properly.....all complete job as per specifications and direction of E/I.								
			1	13.5	0.6	1.2	=	9.720	
			1	3.2	4	1.5	=	19.200	
			2	2	1.5	1.5	=	9.000	
			2	3	0.75	0.9	=	4.050	
			1	13.5	0.98	1.6	=	21.060	
			2	3.5	1.75	1.2	=	14.700	
			1	15.5	0.60	1.3	=	12.090	
			1	4.9	0.80	0.95	=	3.720	
			1	3.7	2.00	1.1	=	8.140	
			1	2.6	0.50	0.6	=	0.780	
			1	7.15	1.50	1.3	=	13.940	
								102.460	
			TOTAL QUANTITY		72.55				

J.E. *[Signature]*
23/11/21

A.E. *[Signature]*
23/11/21

E.E. *[Signature]*
23/11/21

F.D.R.OF ROAD FROM PMGSY ROAD DASRATHPUR HOUSE OF GANGA GIRI TO MMGSY ROAD SATBHAIYA
TOLA



6/12
24/11/22
J.E.

24/11/22
A.E.

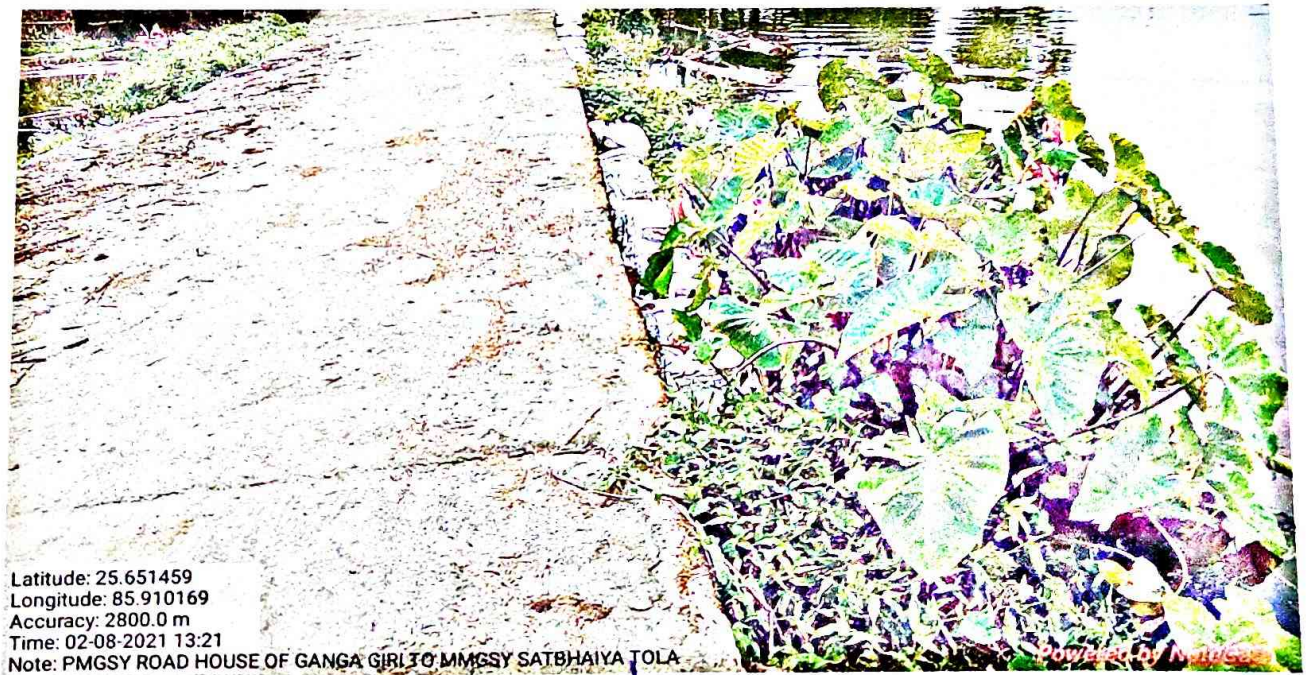
24/11/22
E.E.

RWD (W) DIVISION TEGHRA

RWD (W) DIVISION TEGHRA

RWD (W) DIVISION TEGHRA

F.D.R.OF ROAD FROM PMGSY ROAD DASRATHPUR HOUSE OF GANGA GIRI TO MMGSY ROAD SATBHAIYA
TOLA



34/24/01/22
J.E.

34/24/1/22
A.E.

34/24/1/22
E.E.

RWD (W) DIVISION TEGHRA

RWD (W) DIVISION TEGHRA

RWD (W) DIVISION TEGHRA

F.D.R.OF ROAD FROM PMGSY ROAD DASRATHPUR HOUSE OF GANGA GIRI TO MMGSY ROAD SATBHAIYA
TOLA



643
24/10/22
J.E.

24.10.22
A.E.

24/10/22
E.E.

RWD (W) DIVISION TEGHRA

RWD (W) DIVISION TEGHRA

RWD (W) DIVISION TEGHRA

कार्यपालक अभियंता का कार्यालय

ग्रामीण कार्य विभाग , कार्य प्रमण्डल, समस्तीपुर

पत्रांक—

Camp, Teghna, 01

दिनांक— 7.12.21

प्रेषक,

कार्यपालक अभियंता

ग्रामीण कार्य विभाग ,

कार्य प्रमण्डल, समस्तीपुर ।

सेवा में,

कार्यपालक अभियंता

ग्रामीण कार्य विभाग ,

कार्य प्रमण्डल, तेघड़ा (बेगूसराय)।

विषय: शीर्ष—FDR अन्तर्गत पथों की जांच प्रतिवेदन समर्पित करने के संबंध में

प्रसंग : कार्यपालक अभियंता, ग्रामीण कार्य विभाग, तेघड़ा (बेगूसराय) के पत्रांक— 11.2021 दिनांक—24.11.2021

महाशय,

उपर्युक्त विषयक प्रसांगिक पत्र के संबंध में कहना है कि ग्रामीण कार्य विभाग, कार्य प्रमण्डल, तेघड़ा (बेगूसराय) के अधीन शीर्ष—FDR अन्तर्गत वर्ष— 2021-22 के पथों की जाँच कर जाँच प्रतिवेदन आवश्यक कारवाई हेतु समर्पित किया जाता है ।

अनु०— पथों की सूची ।

विश्वासभाजन



कार्यपालक अभियंता

ग्रामीण कार्य विभाग, कार्य प्रमण्डल, समस्तीपुर ।

ग्रामीण कार्य विभाग, कार्य प्रमण्डल, तेघड़ा द्वारा कराये गये पथों की जाँच से संबंधित प्रतिवेदन

क्र० सं०	पथ का नाम	क्षतिग्रस्त भाग (मी० में)	कराय गये कार्य	कराय गये कार्य की राशि (रु०)	GST @ 12%	L Cess @ 1%	S.F. @ 10%	Total	अभियुक्ति
1	NH JHAMATIA GHAT - GOPALPUR	188.000	Bricks bats,sand bags,Bamboo piling	700937.00	84112.00	7009.00	13883.00	805941.00	कार्य पूर्ण ।
2	NH-28 Rani to Bhajos Dih	711.000	Bricks bats	416574.00	49989.00	4166.00	24074.00	494803.00	कार्य पूर्ण ।
3	X Road - Chan Barkhut C. Ghat	174.000	Brics Bats,Sand bags	414436.00	49732.00	4144.00	9366.00	477678.00	कार्य पूर्ण ।
4	Kadrabad (PWD Road) To (Dharampur) Bachhwara	95.000	Bricks bats,sand bags,GSB Gr-II	218310.00	26197.00	2183.00	4934.00	251624.00	कार्य पूर्ण ।
5	Railway Gumti Bachhwara to Siswa Road	120.000	Brics Bbat	279283.00	33514.00	2793.00	16141.00	331731.00	कार्य पूर्ण ।
6	Chamtha REO Goptol to Chiraiyatok(Rescined work)	27.000	Bricks Bats, Sand bags	69608.00	8353.00	696.00	1573.00	80230.00	कार्य पूर्ण ।
7	Chan Bharkhoot L06 Chhot khut to Laxman tola Bharat chowk	16.000	Brics bats	69184.00	8302.00	692.00	1564.00	79742.00	कार्य पूर्ण ।
8	Constriction of bridge of size 4x24.75 m. on Dadopur ghat of Baya river of Bachhawara block in Begusarai Dist.	39.000	Brics Bats,Sand bags	71333.00	8560.00	713.00	1612.00	82218.00	कार्य पूर्ण ।
9	PWD RD - MOKARIR	79.000	Brics bats	134076.00	16089.00	1341.00	3030.00	154536.00	कार्य पूर्ण ।
10	L039 - T01 Chabilapur to Barkurwa (VR39)	78.000	Brics bats	663207.00	79585.00	6632.00	38326.00	787750.00	कार्य पूर्ण ।
11	Tara Chowk to Rampur	5.000	Sand bags,Bricks bats,HP -600mm dia	93011.00	11161.00	930.00	2102.00	107204.00	कार्य पूर्ण ।
12	PWD ROAD - DAHRATHPUR	132.000	Sand bags	115900.00	13908.00	1159.00	2619.00	133586.00	कार्य पूर्ण ।
13	Patni Chowk Rwd Road to Makratol	168.000	E/W,Sand bags,Brics bats,HP NP-3 1000mm dia	788628.00	94635.00	7886.00	17823.00	908972.00	कार्य पूर्ण ।
14	L023-NH-28 To Temahuan(VR23)Chiwanr	6.000	Bricks bats	90680.00	10882.00	907.00	5243.00	107712.00	कार्य पूर्ण ।
15	S048 Mahadalit Tola to Larwapur Bandh Via House of Munna Mahto (Talan)	507.000	Sand bags	319926.00	38391.00	3199.00	7230.00	368746.00	कार्य पूर्ण ।
16	Bachhwara to Samsa Road	341.000	Brics bats	426284.00	51154.00	4263.00	24636.00	506337.00	कार्य पूर्ण ।
17	PMGSY Road Dasrathpur house of ganga giri to MMGSY Road Satbhaiya tola	82.000	Sand bags	87851.00	10542.00	879.00	1985.00	101257.00	कार्य पूर्ण ।
18	L023 - NH-28 To Temahuan (VR23)	61.000	Sand bags	158317.00	18998.00	1583.00	3578.00	182476.00	कार्य पूर्ण ।
19	PWD Road to Rajapur Ragho	21.000	Brics bats	44129	5295.00	441.00	997.00	50862.00	कार्य पूर्ण ।

TOTAL
LENGTH

HRA

20	L03-Teghra Atarua P Road To Mananpur	219.000	Bricks bats	235058	28207.00	2351.00	13177.00	278793.00	कार्य पूर्ण ।
21	L032-T02 to Maheshpur	19.000	Bricks bats	116536	13984.00	1165.00	6534.00	138219.00	कार्य पूर्ण ।
22	T02 Churamanchak To Gaura Sima	135.000	Bricks bats	173613	20834.00	1736.00	9733.00	205916.00	कार्य पूर्ण ।
23	PWD To Din Dhayal Path	180	GSB, WBM Gr-III	303852	36462.00	3039.00	18056.00	361409.00	कार्य पूर्ण ।
24	NH-28 To Ayodha	887	Bricks bats ,GSB	369511	44341.00	3695.00	7039.00	424586.00	कार्य पूर्ण ।
25	L03S-Issapur To Samastipur Siwan	357	Bricks bats Sand bags	1216963	146036.00	12170.00	27503.00	1402672.00	कार्य पूर्ण ।

उपरोक्त सभी पथों की जाँच की गई जो संतोषप्रद है ।

8825000.00


Executive Engineer

RWD (W) Division Samastipur

Inspection Report for Flood Damage Work

Date:-

- 1 Name of PIUs- Executive Engineer , R.W.D. Works Division, Teghra , Begusarai
- 2 Name of Block- Mansurachak
- 3 Name of Road /Bridge- PMusey Road Dasthampur house & ganga giri to
A. For Road - MMusey Road Sattbhanga Tola
- 1 Damage Location/Chainage : Ch- 0.345 km to 0.359 km, 0.475 km to 0.489 km, 0.492 km to 0.530 km, 0.542 km to 0.565 km.
- 2 Damage Length : 82.00 m
- 3 Nature of Damage : Crust Washed out and Blank also Washed under side
- 4 Details of Restoration Works :
- i Material being used in Restoration Works : E.C. bags, Sacks, 1/2 sand etc
- ii Equipments/ Tools being used in Restoration Works : JCB, Tractor, skilled labour etc
- iii Procedure taken up in Restoration Works : Laying and placing E.C. bags
- iv Restored Length : 82.00 m
- B For Bridge - N/A
- 1 Damage Location/Chainage : N/A
- 2 Damage Length : N/A
- 3 Nature of Damage : N/A
- 4 Details of Restoration Works : N/A
- i Material being used in Restoration Works : N/A
- ii Equipments/ Tools being used in Restoration Works : N/A
- iii Procedure taken up in Restoration Works : N/A
- iv Restored Length : N/A

G. S. A. J. M. A.

A.E.

Executive Engineer

R.W.D. Works Division, Teghra, Begusarai

work done. Satisfactory

Signature

(Name of Inspector)