



ग्रामीण कार्य विभाग

Rural Works Department, Govt of Bihar

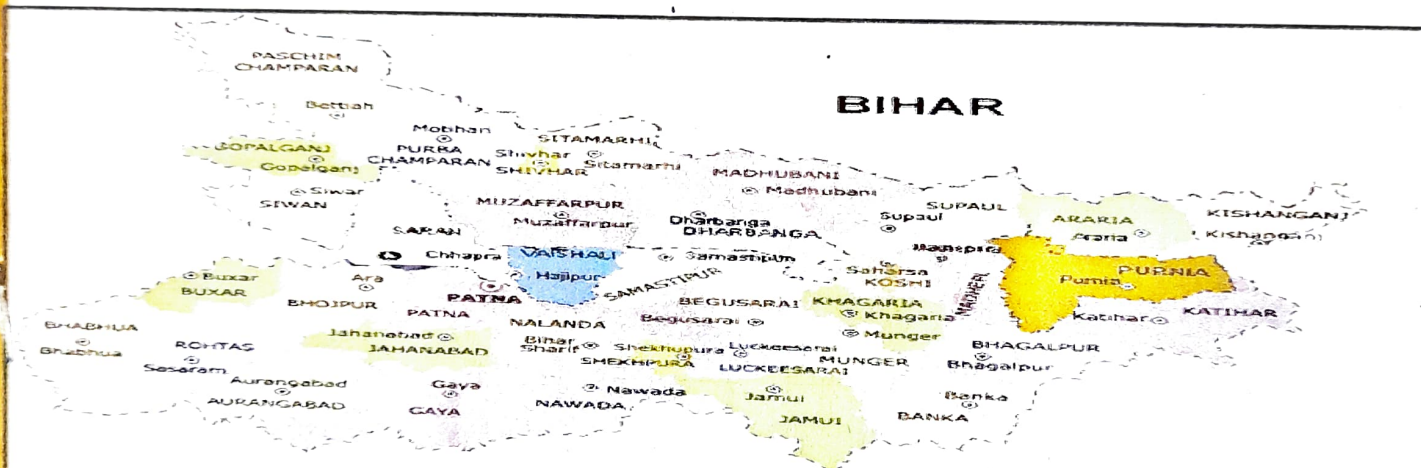


BIHAR RURAL ROADS PROJECT

Bihar Rural Road Development Agency (BRRDA)

Govt. of Bihar

EMERGENT REPAIR OF ROAD FROM PUNADIH SCHOOL TO MURAJPUR UNDER FDR



Name of the Road :-

EMERGENT REPAIR OF ROAD FROM PUNADIH SCHOOL TO MURAJPUR UNDER FDR

DISTRICT	:	Patna	
DIVISION	:	Patna	
BLOCK	:	Patna Sadar	
Total Damaged length of Road	:	40.00	m
TOTAL COST OF CONSTRUCTION	:	0.60	Lacs
TOTAL COST OF PROJECT	:	0.60	Lacs

Executive Engineer
Rural Works Division,
Patna

SUMMARY OF COST ESTIMATE FOR THE PROJECT

NAME OF ROAD :	EMERGENT REPAIR OF ROAD FROM PUNADIH SCHOOL TO MURAJPUR UNDER FDR	
DISTRICT	PATNA	
BLOCK	PATNA SADAR	
DIVISION	PATNA	
Total Damaged length of Road	40.00 m	
SI. No.	DESCRIPTION	AMOUNT (LAKHS)
1	COST OF ITEM	55657.92 ₹ 59,977.92
	TOTAL COST IN LACS =	0.600 0.557

[Signature]
23.9.21
JE
RWD

[Signature]
23.9.21
AE
RWD

[Signature]
11/11/21
EE
RWD

Technically sanctioned for Rs. 0.557 lac (Rupees Fifty
five thousand and seven hundred only)
including five year Maintenance Cost

तकनिकी सलाहकार
ग्रामीण कार्य विभाग
कार्य अंचल, पटना

Superintending Engineer
R.W.D. WORKS CIRCLE PATNA

Certified copy
[Signature]
18/12/2021
Superintending Engineer
R.W.D. WORKS CIRCLE, PATNA
[Signature]

Inspection Report for Flood Damage Work

Date :- 22.11.2021

1. Name of PIUs :- (L.R.W.D./W) Division, Patna
2. Name of Block / Road :- Patna Sadar / Punadik School to Murgajpur

- A. For Road
1. Damage Location / Chainage :- In whole length where ever required
2. Damage Length :- 40m
3. Nature of Damage :- Road crust & Flank damage

- i. Material being used in Restoration works :- Brick bats
- ii. Equipments / Tools being used in Restoration works :- J.C.B, Tractor & Roller
- iii. Procedure taken up in Restoration works :- laying, spreading & compacting
- iv. Restored Length : 40 m


B. For Road


1. Damage Location / Chainage :-
2. Damage Length :-
3. Nature of Damage :-
- NIL

4. Details of Restoration Works :-

- i. Material being used in Restoration works :- Brick bats
- ii. Equipments / Tools being used in Restoration works :- J.C.B, Tractor & Roller
- iii. Procedure taken up in Restoration works :- laying, spreading & compacting
- iv. Restored Length : 40 m

Work is satisfactory.



06/12/21
AE


Name of Inspector
Executive Engineer
R.W.D. Works Division, Masaurhi


प्रतिवेदन

कार्य का नाम : पुनाडीह से मुराजपुर तक पथ की आपातकालीन मरम्मत ।
पथ की लम्बाई : 0.040 कि० मी०
प्राक्कलित राशि : रू० 0.60 लाख
मद : एफ० डी० आर०

प्रस्तुत प्राक्कलन पटना सदर प्रखण्ड अंतर्गत पुनाडीह से मुराजपुर तक पथ की आपातकालीन मरम्मत हेतु एकरारनामित दर पर रू० 0.60 लाख (साठ हजार रूपये) मात्र का तैयार किया गया है । विगत पिछले माह में बाढ़ एवं अतिवृष्टि के कारण पथ में बड़े-बड़े गड्ढे बन गये हैं । विभागीय निर्देशानुसार पथ को यातायात योग्य बनाना है, जिसके लिए पहले से ही संवेदक चयनित है । पथ के क्षतिग्रस्त पथांश में ब्रीक्स वेट भर दिया गया है । वर्तमान में आवागमन चालू है । अतः कार्यहित में प्राक्कलन की स्वीकृति अति आवश्यक है ।


23.9.21
कनीय अभियंता
पटना सदर


23.9.21
सहायक अभियंता
पटना सदर


11/11/21
कार्यपालक अभियंता
(ग्रामीण कार्य विभाग)
कार्य प्रमंडल, पटना

F6

NAME OF ROAD

EMERGENT REPAIR OF ROAD FROM PUNADIH SCHOOL TO MURAJPUR UNDER FDR

Sl. No.	SDB SL.NO	MORD Ref.No	Description	Unit	NOS	LENGTH	WIDTH	HEIGHT	QUANTITY	RATE	AMOUNT (in Rs.)
1			Supplying Brick bats with carriages at site including labour cess ,GST and seigniorage fee (excluding over head and CP).								
				Cum					30.702 33.12	1,541.00	51,037.92
2			Supplying Unskilled Labour for Brick bats for spreading compacting and leveling including labour cess , GST and (excluding over head and CP).								
				nos.					30.00 28 Nos	298.00	8,940.00
TOTAL										Rs	₹ 59,977.92

[Signature]
23.9.21

JE (RWD)

[Signature]
21/09/21

AE(RWD)

[Signature]
EE (RWD)
WORK DIVISION
PATNA

55657.01

= 0.557

