

तकनीकी प्रतिवेदन


पथ का नाम :- बुच्ची पासी के घर से ब्राह्मण डेली
पथ की लंबाई :- ०.९७५ कि०मी०
प्राक्कलित राशि :- Rs. 105199-00
प्रमण्डल का नाम :- बेनीपुर
अंचल का नाम :- द२मं०/१५
योजना शीर्ष :-
योजना वर्ष :- २०२१-२२


प्रस्तुत प्राक्कलन विभागीय पत्रांक-मु.अ. ५-५२७५ पृष्ठ दिनांक- २२-१०-२१ के आदेशानुसार पथ में कराये गये यातायात पुर्नस्थापना कार्य के निमित्त तैयार की गयी है।

यह प्राक्कलन बुच्ची पासी के घर से ब्राह्मण डेली कार्य के लिए तैयार की गई है। वर्ष २०२१ में आयी प्रलयंकार बाढ़/अतिवृष्टि के कारण पथ कई जगहों पर क्षतिग्रस्त हो गया था। जिसके कारण आवागमन अवरुद्ध हो गई थी जिसमें अस्थाई यातायात पुर्नस्थापन कार्य किया गया है।

प्रस्तुत प्राक्कलन संपादित कार्य के समय लागू अनुसूचित दर पर, जो संवेदक लाभांश को छोड़कर था, उसे प्रावधान करते हुए तैयार किया गया है।

अतः किये गये कार्यों के भुगतान हेतु प्राक्कलन की प्रशासनिक स्वीकृति अपेक्षित है।


कनीय अभियंता,
ग्रामीण कार्य विभाग,
कार्य प्रशाखा बेनीपुर


सहायक अभियंता,
ग्रामीण कार्य विभाग,
कार्य अवर प्रमण्डल बेनीपुर


कार्यपालक अभियंता
ग्रामीण कार्य विभाग,
कार्य प्रमण्डल बेनीपुर।

Abstract of cost.

Name of Road:-Buchi Pasi ke Ghar to Brahman toli

Sl No	Particulars of Item	Quantity (In M ³)	Rate	Amount
1	0	44.41	2004.96	89040
			Total =	89040
	Add 12% GST		=	10685
	1% L.C		=	890
	(S.Fee)- B/Bat(44.41*1032*0.1)=4583		=	4583
			Grand Total=	105199

Sum Rupees 105200=00

[Signature]
J.E
RWD, Benipur

[Signature]
A.E 11/11/21
RWD, Benipur

[Signature]
E.E
RWD, Benipur

Checked and Verified

[Signature]
12-12-2021
AE

355
14/12/21
GC

Technically Sanctioned for RS 105200=00 (Rupees one Lacs Five Thousand Two Hundred) only

[Signature]
Superintending Engineer
RWD, Works Circle, Darbhanga

Flood Estimate


Name of Road:- Buchi Pasi ke Ghar to Brahman Toli.

Providing and laying Filling in ditches with brick bats including loading, unloading and light ramming all complete job. As per specification & Direction of E/I

Chainage (In M)	Length (In M)	Average Width (In M)	Average Height (In M)	Qty in cum
at 100m to 200m	5.00	$(.65+1.1)/2$	$(.4+0.5)/2$	1.97
	2.00	$(.55+0.75)/2$	$(.35+0.55)/2$	0.59
	2.00	$(0.6+0.8)/2$	$(0.4+0.6)/2$	0.70
	7.00	$(0.6+1)/2$	$(.4+.7)/2$	3.08
	58.00	$(0.65+1.15)/2$	$(.4+.8)/2$	31.32
	2.00	$(4+5)/2$	$(.7+.8)/2$	6.75
			Total =	44.41


J.E
RWD, Benipur


A.E 11/11/24
RWD, Benipur


E.E
RWD, Benipur

Inspection Report of Flood Damage work

Name of PIUs:- RWD Works Division, Benipur

Name of Block/Road:- Benipur / Buahi Pasi ke ghaz se Brahman toli

A. For Road

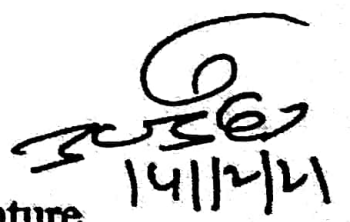
1. Damage Location Chainage:- Ch. 100 km to Ch. 200 km
2. Damage Length :- 76 m
3. Nature of Damage :- Road crust & flank
4. Details of Restoration Works
 - i. Material being used in Restoration works:- Brick bats
 - ii. Equipment's / Tools being used in Restoration works:- tractor
 - iii. Procedure taken up in Restoration works:- manually filling
 - iv. Restored Length:- 76 m

B. For Bridge

1. Damage Location Chainage:-
 2. Damage Length :-
 3. Nature of Damage :-
 4. Details of Restoration Works
 - i. Material being used in Restoration works:-
 - ii. Equipment's / Tools being used in Restoration works:-
 - iii. Procedure taken up in Restoration works:-
 - iv. Restored Length:-
- N/A

work found satisfactory.


Signature of JE/AB/EE


Signature
(Name of Inspection) BR