

RURAL WORKS DEPARTMENT



GOVERNMENT OF BIHAR

phatehapur balua haat PMGSY Path maahe jha ke ghar ke paas
to krpaanand thaakur tola tak

DIVISION :- R.W.D, WORKS DIVISION , FORBESGANJ

CIRCLE :- R.W.D, WORK CIRCLE, KISHANGANJ

BLOCK :- FORBESGANJ

ESTIMATED COST

1332670.00

प्रतिवेदन


प्रस्तुत प्राक्कलन ग्रामीण कार्य विभाग, कार्य प्रमंडल, फारबिसगंज अंतर्गत

नदीपत्रांग प्रखंड के पथ ^{Path meathe gha ke ghar ke} ~~Phetchpur Balua hat PMGSY Road near kahal~~ ^{to Kr Paanand Thakur to khal} जो विभागीय Online Monitoring System MIS पर अपलोड

है के बाढ़ 2021 से क्षतिग्रस्त हो जाने के कारण यातायात लायक Motorable हेतु बनाया गया है। इस कार्य को कराने का निर्देश ग्रामीण कार्य विभाग, बिहार सरकार के पत्रांक-मु0अ0-4(मु0) विविध कार्य-23-60/2020-1937/पटना, दिनांक-07.07.2021 से प्राप्त है। इस पत्र के Real time geo-tagged Photograph को कार्य के दौरान अपलोड करते हुए (Motorable) कार्य कराना सुनिश्चित करने का निर्देश प्राप्त है।

उक्त निर्देश के आलोक में ^{युएल} नदी/नदी उपधार एवं अतिवृष्टि से आए बाढ़ के कारण इस पथ के Road Way के क्षतिग्रस्त हो जाने से सुरक्षित आवागमन हेतु Motorable कार्य कराया गया है। नेपाल तराई से निकलने वाली इस नदी के तेज धार एवं अतिवृष्टि से इस पथ में कटाव की स्थिति बनी। Motorable कार्य में आवश्यकता अनुसार Bamboo Pilling/Pitching of E.C Bags filled with local sand/ Local Sand Filling/ Brick bats का इस्तेमाल किया गया है। Motorable कार्य कराकर यातायात बहाल कर दिया गया है। निर्देशानुसार कराये गये Geo-tagged Photograph real time के साथ MIS पर अपलोड है। MIS की छायाप्रति, अपलोडेड फोटोग्राफ की छायाप्रति दर विश्लेषण एवं विभागीय आदेशों की छायाप्रति प्राक्कलन में संलग्न की जा रही है। प्राक्कलन में प्रयुक्त दर अद्धतन है।

प्राक्कलन की यथा शीघ्र अनुमोदन अपेक्षित है ताकि अग्रेतर कार्रवाई की जा सके।



कनीय अभियंता
ग्रामीण कार्य विभाग
कार्य प्रशाखा-



सहायक अभियंता
ग्रामीण कार्य विभाग
कार्य अवर प्रमंडल-



कार्यपालक अभियंता
ग्रामीण कार्य विभाग
कार्य प्रमंडल, फारबिसगंज

ग्रामीण कार्य विभाग
बिहार, सरकार

पत्रांक - मु0अ0-4 (मु0) विविध कार्य-23-60/2020 - 1937

पटना, दिनांक 07/07/2021

प्रेषक,

पंकज कुमार पाल (भा0प्र0से0)
सचिव

सेवा में,

सभी कार्यपालक अभियंता
ग्रामीण कार्य विभाग,

विषय- बाढ़ अतिवृष्टि से क्षतिग्रस्त पथों/पुलियों को यातयात लायक (Motorable) करने के संबंध में।

महाशय,

उपर्युक्त विषय के संबंध में निदेश दिया जाता है कि प्रमंडल अन्तर्गत सभी अभियंता बाढ़/अतिवृष्टि से क्षतिग्रस्त पथों का शत प्रतिशत निरीक्षण करेंगे। पथों/पुलियों के क्षतिग्रस्त भाग से पानी उतरते ही उसे यातायात लायक बनाने की कारवाई एवं Motorable किये जाने से पहले तथा Motorable कार्य के बाद का Real time, Geo tagged photographs को MIS पर तत्क्षण अपलोड किया जाना सुनिश्चित करेंगे। इन कार्यों को कराने हेतु कार्यपालक अभियंता पूर्ण रूप से जिम्मेवार होंगे। कार्य न कराने की स्थिति में उनके विरुद्ध अनुशासनिक कार्रवाई की बाध्यता होगी।

विश्वासभाजन
(पंकज कुमार पाल)
सचिव

पटना, दिनांक 07/7/2021

ज्ञापांक- मु0अ0-4 (मु0) विविध कार्य-23-60/2020 - 1937

प्रतिलिपि:-सभी अधीक्षण अभियंता को सूचनार्थ एवं आवश्यक कार्रवाई हेतु प्रेषित। साथ ही उन्हें निदेश दिया जाता है कि वे लगातार अनुश्रवण एवं निरीक्षण करते हुए क्षतिग्रस्त भाग को अतिशीघ्र यातायात लायक बनवाने की कार्रवाई सुनिश्चित करेंगे।

सचिव

पटना, दिनांक 07/7/2021

ज्ञापांक-मु0अ0-4 (मु0) विविध कार्य-23-60/2020 - 1937

प्रतिलिपि:-सभी मुख्य अभियंता, ग्रामीण कार्य विभाग को सूचनार्थ एवं लगातार अनुश्रवण करने हेतु प्रेषित।

सचिव

Inspection Report for Flood Damage Work

1. Name of PIUs :

2. Name Of Block / Road

Narpatganga/ Phetchpur Balua hat Anggy road near
nawal gha house to Adimaitola road no 11
path machine gha ke ghar ke paar to Karpurana trackkur
tola tak.

A. For Road

1. Damage Location / Chainage

: Ch- 0.0 Km, 3.6 Km

2. Damage Length

: 63 m

3. Nature Of Damage

: 26.248355, 87.072922

4. Details Of Restoration

:

i) Material Being Used In Restoration

Local sand, H.P.E. Humpipe, Brick bat, bamboo pile

ii) Equipment / Tools Being Used In Restoration Works

Tractor, JCB, Roller, bamboo pile machine

iii) Procedure Taken Up In Restoration Works

: Filling all cuts properly of damaged
area :

iv) Restored Length

: 63 m

B. For Bridge

1. Damage Location / Chainage

:

2. Damage Length

:

3. Nature Of Damage

:

4. Details Of Restoration

:

i) Material Being Used In Restoration

:

ii) Equipment / Tools Being Used in Restoration Works

:

iii) Procedure Taken Up In Restoration Works

::

iv) Restored Length

:

"S"

N/A



Signature of JE / AE / EE

 21/11/22

Signature

(Name Of Inspector)

Abstract of Cost

Name of Work : Estimate for Repairing/Restoration/Making Motorable Roads **Damaged during flood**
1 JULY 2021 in ARARIA District

Name of Road:

path maahle jha ke ghar ke pass

RESTORATION OF ROAD FROM PHATEHPUR BALUA HAT PMGSY ROAD NEAR NAWAL JHA

Block: NARPATGANJ

~~HOUSE TO ADIWASI TOLA WARD NO 11 PITHAURA SIMA~~
to Kripa nand thakur tola haldar

District: ARARIA

Division : RWD, Works Division, FORBESGANJ

Circle: RWD, Work Circle, Kishanganj

Sl No.	Description	Unit	Quantity (m3)	Rate (Rs)	Amount (Rs)
1	Filling of local sand obtained from river bed, watering & ramming, all complete job as per specification & direction of Engineer-in-charge.				
		Cum	175.00	627.77	109859.75
2	Labour for cutting 62mm to 75mm dia bamboo piles to size and making shoes & driving by jet machine etc. all complete job as per specification & direction of Engineer-in-Charge.				
		Mtr.	180.00	75.86	13654.80
3	Labour for fitting & fixing 62mm to 75mm dia bamboo runners in position at every vertical pile with 150 mm long nails or 38 swg G.I wire including cost of G.I wire or nails etc all complete job as per specification & direction of Engineer-in-Charge.				
		Mtr.	60.00	40.06	2403.60
4	Supplying of EC bag, filling of local sand, stitching and placing in position as per the direction of Engineer-in-charge.				
		Each	1809.89	37.35	67599.53
5	Supply and Carriage of brick bats upto 8 km breach and placing in breaches and lying of bats, all complete job.				

6	Supply, laying and Carriage of of hume pipe 1000 mm dia (HPC), all complete job.	Cum	511.11	1870.43	955995.48
		meter	7.50	5382.71	40370.33
	TOTAL AMOUNT =				1189883.48
	ADD 12.00 %GST=				142786.02
	ADD L. CESS 0.0%=				0.00
	SAY TOTAL AMOUNT =				1332669.50
					1332670.00

20/8/24
NIG
NJ

AE
20/08/24
RWD SUB DIV. RANIGANJ

20/8/24
EE
RWD WORKS DIV. FORBESGANJ

Technically Sanctioned for Rs = 13,32,670.00 Rupees thirteen Lacs
Thirty-two thousand six hundred seventy only.

SE
KISHANGANJ

28/4/22
Superintending Engineer
RWD (W) Circle-Kishanganj
28/4/22

Phetapur Balua hat PMGSY Road ^{Path} ~~near~~ ^{maerhe sha ke ghar ke pass} ~~Nawal Jha house~~ ^{to} ~~to~~ ^{Kirpanand Thackeri tola tak.}



④
 15/8/21
 AE

PR
 19/08/21
 AE

फतेहपुर बेल्ला हॉट पीगस रोड माथे गैर के गहन के पास
 Admari to a road north to Kopaanamd thaakun to latek.



④ 16/8/21
 16/08/21
 AZ

Fatehpur Bella hot PMGSY Road near near wall Jha
 Admisi to a road work to Kopaanand thaakun to late.



Phetehpur Balua-hat Bissy Road near Naula Jhar house to
 Alimuli to ward no. 11 Path maane thake ghar ke pass to
 Karamond nakur tola tak.




Signature



अक्षांश: 26.245312
 देशान्तर: 87.074267
 उन्नयन: 96.21±3 m
 सटीकता: 3.0 m
 समय: 14-09-2021 08:26
 नोट: फतेहपुर बलवा हाट सड़क नियम सवले किशोर को से वाई नंबर 11 आदिवासी बोला पिथौरा सी

Powered by NoteCam

Fatehpur Balwa hat Pingsy Road to Kopaanand thakur Jala tak, pathmahegha ke ghar ke pass to reach the house

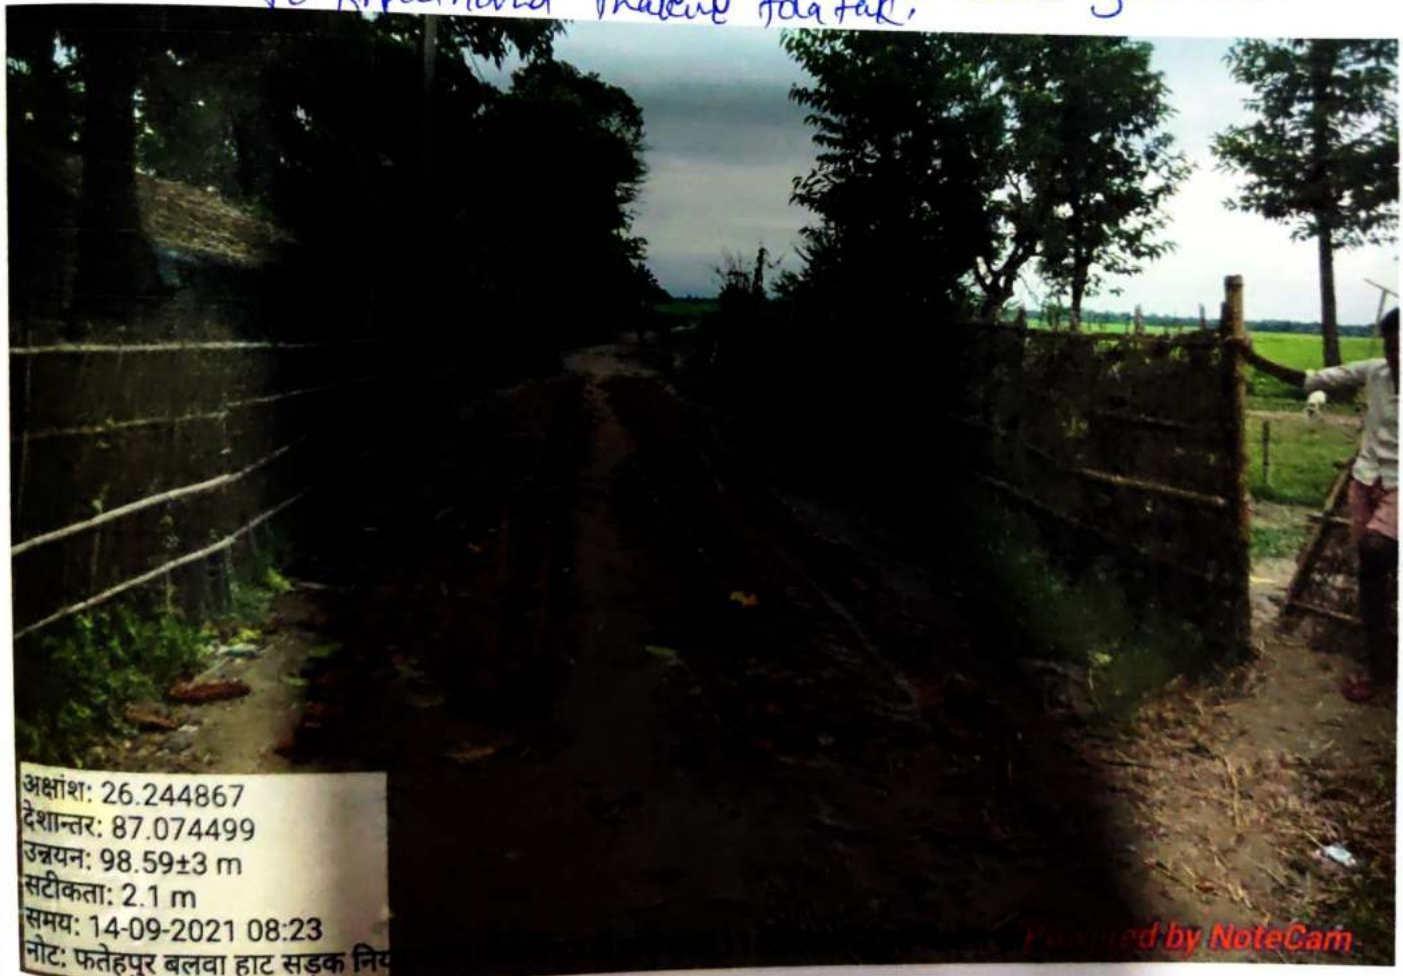

अक्षांश: 26.244867
 देशान्तर: 87.074499
 उन्नयन: 98.59±3 m
 सटीकता: 2.1 m
 समय: 14-09-2021 08:23
 नोट: फतेहपुर बलवा हाट सड़क नियम सवले किशोर को से वाई नंबर 11 आदिवासी बोला पिथौरा सी

Powered by NoteCam

14/9/21
 14/09/21
 RE