

(4)

RURAL WORKS DEPARTMENT GOVT OF BIHAR



NAME OF WORKS :-

Koshi Bandh to Kunauli

BLOCK :-

NIRMALI

FDR

Rs. 228785.00

YEAR (2021-22)

R.W.D., WORKS CIRCLE, MADHEPURA

R.W.D., WORKS DIVISION, SUPAUL

प्रतिवेदन

पथ का नाम :- Koshi Bandh to Kunauli

कार्य का नाम :- Koshi Bandh to Kunauli

में बाढ़ से क्षतिग्रस्त भाग में यातायात चालू करने का कार्य।


संलग्न प्राक्कलन जुलाई 2021 को प्रखण्ड निर्मली में आयी भीषण बाढ़ से क्षतिग्रस्त
Koshi Bandh to Kunauli पथ

में बाढ़ क्षतिग्रस्त मरम्मति मद से यातायात चालू करने हेतु तैयार किया गया है जिसकी प्राक्कलित लागत Rs. 2,28,785 = 00 है।


उक्त पथ का निर्माण BOARDER ROAD योजनान्तर्गत हुआ है एवं योजना अनुरक्षण अवधि में नी है।

पथ के कटे (क्षतिग्रस्त) भाग में आवश्यकता अनुसार Hume Pipe, Bamboo, लोकल बालू एवं Brick Bats देने के बाद यातायात चालू कराया गया है। पथ के विभिन्न हिस्से में कराये गये कार्य का विवरणी स्पष्ट रूप से प्राक्कलन में दर्शाया गया है।


प्राक्कलन मदों का दर वर्तमान अनुसूचित दर के अनुरूप है।


22.11.21

कनीय अभियंता,
ग्रामीण कार्य विभाग,
कार्य प्रशाखा, निर्मली।


22.11.21

सहायक अभियंता,
ग्रामीण कार्य विभाग,
कार्य अवर प्रमण्डल, निर्मली।


22.11.21


कार्यपालक अभियंता,
ग्रामीण कार्य विभाग,
कार्य प्रमण्डल, सुपौल।

FDR RESTORATION WORK
YEAR (2020-21)


GENERAL ABSTRACT OF COST

BLOCK :-	NIRMALI	DISTRICT	SUPAUL
Name of Road	Koshi Bandh to Kunauli		


S.No.	Description of Items		Amounts
A	TOTAL COST OF RESTORATION	Rs.	193284.01
B	Seigniorage Fees	Rs.	10374.00
C	Add @12% GST	Rs.	23194.08
D	Add @1% Labour Cess	Rs.	1932.84
	Total (A+B+C+D)	Rs.	228784.93
	Say	Rs.	228785.00


22.11.21
J.E.

RWD Supaul


22.11.21
A.E.

RWD Supaul


22.11.21
E.E.

RWD Works Division Supaul

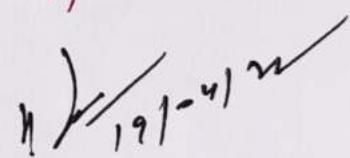
T.S No - 05 dt 19.4.22

प्रातिष्ठ :- प्रो. अ. - 4 (प्रो.) विवर (अ.प्र.) - 23-29/2019-4849 दिनांक - 7/12/21

Technically sanctioned for Rs. ^{228785.00/-}~~157,440.00/-~~ (i.e. Rupees two lacs twenty eight thousand seven hundred eighty five only).

Wdha
19/04/2022

Estimating Officer
Rural Work Department
Work Circle, Madhepura


19/4/22
Superintending Engineer
Rural Works Department
Works Circle, Madhepura

Inspection Report for Flood Damage Work

Date : 22.11.21

1. Name of PIUs :- E.E. RWD, Works Division Supaul.
2. Name of Block/Road :- Nirmali / Koshi Bandh to Kunaule

A. For Road

1. Damage Location/Chainage : 0m, 200m, 260m, 300m, 400m, 600m, 700m, 1300m, 1400m.
2. Damage Length : 116.1m
3. Nature of Damage : Due to Flood
4. Details of Restoration Works :
 - i. Material being used in Restoration work : Brick Bats
 - ii. Equipment/Tools being used in Restoration work : Tractor, Roller
 - iii. Procedure taken up in Restoration work : Filling
 - iv. Restored Length : 116.1m

B. For Bridge

5. Damage Location/Chainage :
6. Damage Length :
7. Nature of Damage : N.A
8. Details of Restoration Works :
 - i. Material being used in Restoration work :
 - ii. Equipment/Tools being used in Restoration work :
 - iii. Procedure taken up in Restoration work :
 - iv. Restored Length :

Signature of JE/AE/EE
22.11.21

'Satisfactory'

Signature
22.11.21
Executive Engineer
(Name of Inspector)
Road Works Department
Work Division, Birpur