

**कार्यपालक अभियंता का कार्यालय,
ग्रामीण कार्य विभाग, कार्य प्रमंडल, कटिहार।**

पत्रांक :- 533

/कटिहार, दिनांक-14-03-2022

प्रेषक,

कार्यपालक अभियंता,
ग्रामीण कार्य विभाग,
कार्य प्रमंडल, कटिहार।

सेवा में,

अपर-मुख्य-कार्यपालक-पदाधिकारी,
BRRDA, 3री मंजिल, भूमि विकास बैंक भवन,
बिहार, पटना।

विषय :- शीर्ष New Maintenance Policy-2018 योजनान्तर्गत निर्माण हेतु आवंटन की अधियाचना के संबंध में।

महाशय,

उपर्युक्त विषय के संबंध में कहना है कि शीर्ष New Maintenance Policy-2018 योजनान्तर्गत ग्रा0का0वि0, कार्य प्रमंडल, कटिहार द्वारा विहित प्रपत्र में अधियाचना तैयार कर आपके अग्रेतर कार्रवाई हेतु समर्पित की जाती है।

अनु0:-यथोक्त।

विश्वासभाजन,

कार्यपालक अभियंता,
ग्रामीण कार्य विभाग,
कार्य प्रमंडल, कटिहार।

ज्ञापांक:- 533

/कटिहार, दिनांक:- 14-03-2022

प्रतिलिपि:- नोडल पदाधिकारी, 3054 MR, ग्रामीण कार्य विभाग, बिहार, पटना को सूचनार्थ एवं आवश्यक कार्रवाई हेतु समर्पित।

कार्यपालक अभियंता,
ग्रामीण कार्य विभाग,
कार्य प्रमंडल, कटिहार।

Requisition Format for Scheme Head - MR (3054) Under Bihar Rural Road maintenance Policy 2018 (Initial Rectification and Surface Renewal)

Name of Division : Katihar

[Signature]
Executive Engineer
RWD, Works Division, Katihar
04.03.22

Divisional Accounts Officer
RWD, Works Division, Kathar

(See Government of India's Decision (1) below Rule-150)
Form of Utilisation Certificate upto the month of March, 2022

[illegible]

- Scanned with CamScanner

Lab Job number :1

Date :03-03-2022

Name of Customer :M/S Adarsh Traders


Name of Work/ Road :NH-31 Sameli To Madhelee

Sr.no	Location of test (in km).	Corrected U.I value (mm/km)	Road catagory
1	0.100	2593	G
2	0.200	2497	G
3	0.300	2690	G
4	0.400	3175	G
5	0.500	2497	G
6	0.600	3369	G
7	0.700	2593	G
8	0.800	2787	G
9	0.900	3466	G
10	1.000	2206	G
11	1.100	2206	G
12	1.200	3175	G
13	1.300	1624	G
14	1.400	2593	G
15	1.500	2690	G
16	1.600	2739	G
Average IRI value		2581.25	



3.3.2022

JE


03.03.2022
A.E


Executive Engineer
R.W.D. (W) Division
Kalihar

Lab Job number :1
Date :03-03-2022

Name of Customer :M/S Adarsh Traders
Name of Work/ Road :NH-31 Sameli To Madhelee

Date	Time	Section No.	Length in km	Bumps in mm	Speed Rate	OR mm/km	IRI mm/km	ATEGOR ROAD	Latitude	Longitude	Event
3/3/22	14:12:39	1	0.100	260	0	2600	2593	G	25.488358	87.300050	Normal
3/3/22	14:12:39	1	0.100	250	20.2	2500	2497	G	25.487785	87.300823	Normal
3/3/22	14:13:14	1	0.100	270	10.1	2700	2690	G	25.487190	87.301615	Normal
3/3/22	14:13:14	1	0.100	320	20.2	3200	3175	G	25.486645	87.302070	Curve
3/3/22	14:13:50	1	0.100	250	20.2	2500	2497	G	25.486402	87.303047	Normal
3/3/22	14:14:0	1	0.100	340	10.1	3400	3369	G	25.486025	87.303855	Speed Breaker
3/3/22	14:14:24	1	0.100	260	20.2	2600	2593	G	25.485722	87.304747	Normal
3/3/22	14:14:24	1	0.100	280	20.2	2800	2787	G	25.485098	87.305453	Normal
3/3/22	14:14:24	1	0.100	350	20.2	3500	3466	G	25.484173	87.305638	Normal
3/3/22	14:15:0	1	0.100	220	10.1	2200	2206	G	25.483970	87.306497	Curve
3/3/22	14:15:34	1	0.100	220	10.1	2200	2206	G	25.483972	87.307508	Normal
3/3/22	14:15:34	1	0.100	320	20.2	3200	3175	G	25.483950	87.308480	Normal
3/3/22	14:16:10	1	0.100	160	10.1	1600	1624	G	25.483735	87.309377	Speed Breaker
3/3/22	14:17:0	1	0.100	260	10.1	2600	2593	G	25.482858	87.309562	Speed Breaker
3/3/22	14:17:0	1	0.100	270	10.1	2700	2690	G	25.481960	87.309763	Normal
3/3/22	14:17:44	1	0.080	220	10.1	2750	2739	G	25.481830	87.309960	Normal

$$Y = 0 * X^2 + 0.969 * X + 74.60$$

$$X = 2750$$

$$Y = 2739$$


(R) RURAL ROAD
Good <4000
Average 4001-5000
Poor >5001

3.3.2022
J.E

03.03.2022
A-E

Executive Engineer
R.W.D. (N) Division
Katihar

File : C:\RAM KUMAR\MISC Files\Bump integrator\Sameli\Sameli to madheli\New folder\09030835.xls, Section No.
 Name of Customer : M/S Adarsh Traders, Name of Work/ Road : NH-31 Sameli To Madhelee, Lab Job number : 1

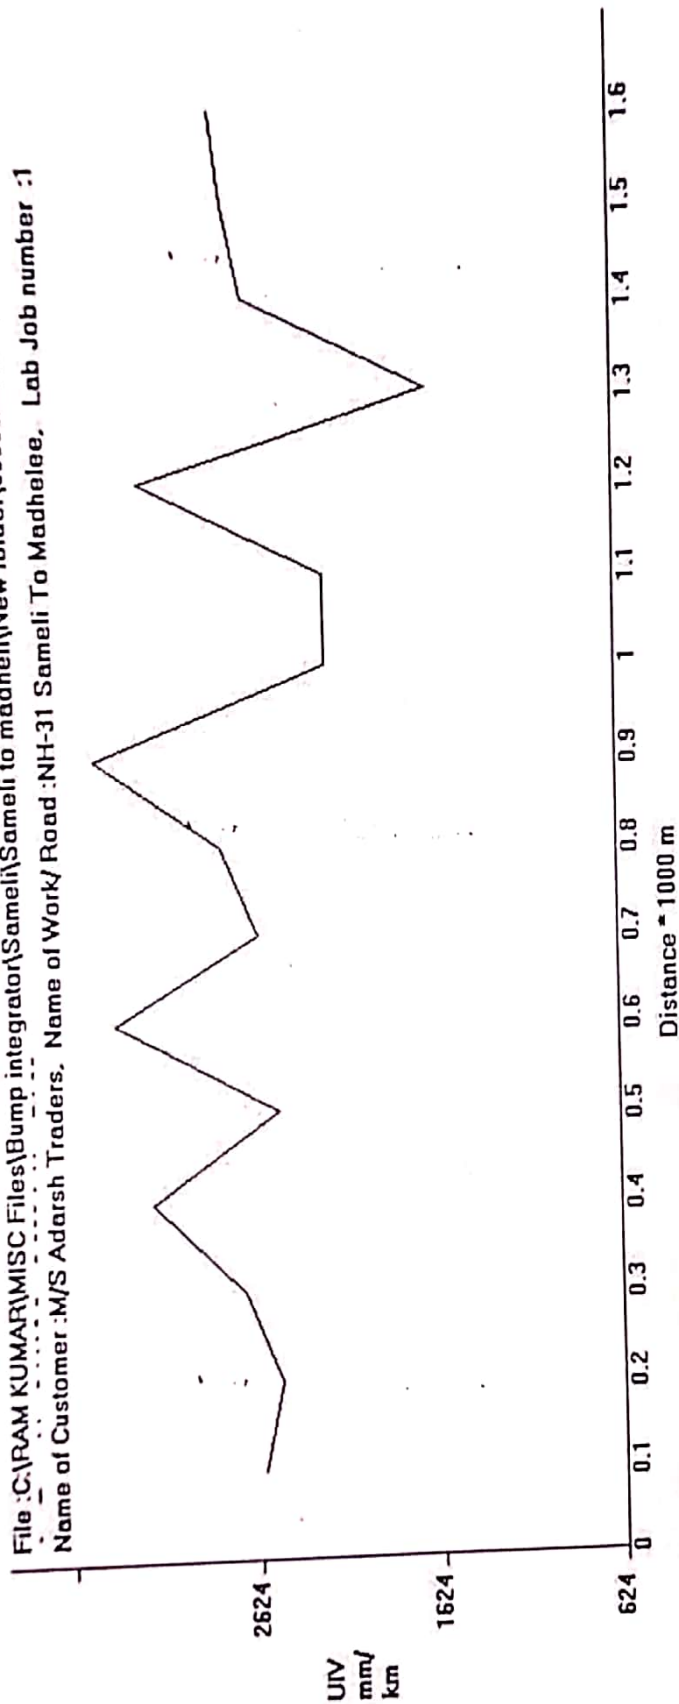

03.03.2022
 J.E

03.03.2022
 J.E

Executive Engineer
 R.W.D. (W) Division
 Kathar

M/S ADARS TRADERS

MNP-2018
Schedule XLV-Form No. 134

NH31 SAMELI TO MADHYELI

R.W.D. KATHAR - DIVISION

SAMELI - SUB-DIVISION

(No. 2077)

MEASUREMENT BOOK

1st & Final Bill

17

Sch. XLV—Form No. 134

Particulars	Details of actual measurement				Contents of area
	No.	L.	B.	D.	
Name of work! - Construction and maintenance of road from NH-31 Sameli to Madhela.					
Name of Agency! - M/s Adarsh Traders					
prop! - Yogesh Kumar Gupta.					
Agreement No! - 12 MBD 2020-21					
Date of commencement! - 5.2.2021					
Date of completion! - 4.11.2021					
Actual date of completion! -					

Abstract of cost					
Date of entry! - 28.2.2022					
1/1.	clearing and grubbing of road land				
	Qty vide TMBP-9				
	2.c Qty = 0.316 Ha				
	53232.56 / Ha ² 16821				
2/2.	Construction of subgrade and earthen shoulder				
	Qty vide TMBP-5				
	2.c Qty = 525 m ³				

Continuation
189.67 / m² = 99576

do - 114297

Particulars	Details of actual measurement				Contents of area
	No.	L.	B.	D.	
				B.F =	3775175
27/27. Plastering with cement mortar on brick work					
Qty vide TMBP-13					
2. c Qty = 90.32 m ²					
@ 157.22/m ² =					6339
28/28 Plv concrete for plain concrete M20 in coping					
Qty vide TMBP-13					
2. c Qty = 0.72 m ³					
@ 5695.89/m ³ =					4125
29/29. Painting Plastering, two coats including primer coats.					
Qty vide TMBP-13					
2. c Qty = 40.32 m ²					
@ 97.89/m ² =					3947
					3789564
Add 12% GST + 1% L.C.E.S.					492643
					4282207
Add @ 10% S.F. =					55514
					4337721
Less below rate = (-)					434
Net payable Amount =					4337287

Continuation

28.2.2022
J.E

28.02.2022
A.E

Executive Engineer
R.W.D. (W) Division
Kathar