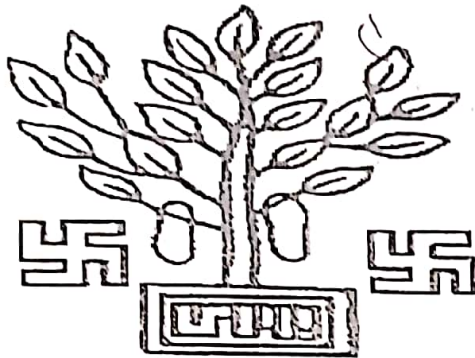


RURAL WORKS DEPARTMENT



GOVERNMENT OF BIHAR

NAME OF ROAD:- RESTORATION OF ROAD FROM FULKAHA BAZAR TO
KOSHIKAPUR NEPAL BORDER

DIVISION:- R.W.D, WORKS DIVISION, FORBESGANJ

CIRCLE:- R.W.D, WORK CIRCLE, KISHANGANJ

BLOCK:- NARPATGANJ

ESTIMATED COST

1477274.00

प्रतिवेदन

प्रस्तुत प्राक्कलन ग्रामीण कार्य विभाग, कार्य प्रमंडल, फारबिसगंज अंतर्गत


कंपोज..... प्रखंड के पथ Fulkaha Bazar to Kosi Khabar Nepal
Road..... जो विभागीय Online Monitoring System MIS पर अपलोड


है के बाद 2021 से क्षतिग्रस्त हो जाने के कारण यातायात लायक Motorable हेतु बनाया गया है। इस कार्य को कराने का निर्देश ग्रामीण कार्य विभाग, बिहार सरकार के पत्रांक-मु0अ0-4(मु0) विविध कार्य-23-60/2020-1937/पटना, दिनांक-07.07.2021 से प्राप्त है। इस पत्र के Real time geo-tagged Photograph को कार्य के दौरान अपलोड करते हुए (Motorable) कार्य कराना सुनिश्चित करने का निर्देश प्राप्त है।

उक्त निर्देश के आलोक में युलहा.....नदी/नदी उपधार एवं अतिवृष्टि से आए बाढ़ के कारण इस पथ के Road Way के क्षतिग्रस्त हो जाने से सुरक्षित आवागमन हेतु Motorable कार्य कराया गया है। नेपाल तराई से निकलने वाली इस नदी के तेज धार एवं अतिवृष्टि से इस पथ में कटाव की स्थिति बनी। Motorable कार्य में आवश्यकता अनुसार Bamboo Pilling/Pitching of E.C Bags filled with local sand/ Local Sand Filling/ Brick bats का इस्तेमाल किया गया है। Motorable कार्य कराकर यातायात बहाल कर दिया गया है। निर्देशानुसार कराये गये Geo-tagged Photograph real time के साथ MIS पर अपलोड है। MIS की छायाप्रति, अपलोडेड फोटोग्राफ की छायाप्रति दर विश्लेषण एवं विभागीय आदेशों की छायाप्रति प्राक्कलन में संलग्न की जा रही है। प्राक्कलन में प्रयुक्त दर अद्धतन है।

प्राक्कलन की यथा शीघ्र अनुमोदन अपेक्षित है ताकि अग्रेतर कार्रवाई की जा सके।


12/8/21
कनीय अभियंता
ग्रामीण कार्य विभाग
कार्य प्रशाखा—


12/8/21
सहायक अभियंता
ग्रामीण कार्य विभाग
कार्य अवर प्रमंडल—


12/8/21
कार्यपालक अभियंता
ग्रामीण कार्य विभाग
कार्य प्रमंडल, फारबिसगंज

Inspection Report for Flood Damage Work

1. Name of PIUs

2. Name Of Block / Road

Narpatganj / Fulkaha Bazar to Koshikapur
Nepal Border

A. For Road

1. Damage Location / Chainage

Ch- 0.1km, Ch- 0.8km, Ch- 1.4km

2. Damage Length

: 43m

3. Nature Of Damage

: Wash/out, cutting

4. Details Of Restoration

i) Material Being Used In Restoration

Local sand, Boick bat, Ham pipes & c Bag

ii) Equipment / Tools Being Used In Restoration Works

JCB, Roller, Tractor, Bamboo binding machine

iii) Procedure Taken Up In Restoration Works

:

iv) Restored Length

43m

B. For Bridge

1. Damage Location / Chainage

:

2. Damage Length

:

3. Nature Of Damage

:

4. Details Of Restoration

:

i) Material Being Used In Restoration

:

ii) Equipment / Tools Being Used in Restoration Works

:

iii) Procedure Taken Up In Restoration Works

::

iv) Restored Length

:

"S"


Signature of JE / AE / EE


Signature

(Name Of Inspector)

Abstract of Cost

Name of Work : Estimate for Repairing/Restoration/Making Motorable Roads
Damaged during flood in JULY 2020 in ARARIA District

Name of Road:

RESTORATION OF ROAD FROM FULKAHA BAZAR TO KOSHIKAPUR NEPAL BORDER

Block: FORBESGANJ

District: ARARIA

Division : RWD, Works Division, FORBESGANJ

Circle: RWD, Work Circle, Kishanganj


Sl No.	Description	Unit	Quantity (m3)	Rate (Rs)	Amount (Rs)
1	Filling of local sand obtained from river bed, watering & ramming, all complete job as per specification & direction of Engineer-in-charge.				
		Cum	782.60	627.77	491294.02
2	Labour for cutting 62mm to 75mm dia bamboo piles to size and making shoes & driving by jet machine etc. all complete job as per specification & direction of Engineer-in-Charge.				
		Mtr.	1032.00	75.86	78286.08
3	Labour for fitting & fixing 62mm to 75mm dia bamboo runners in position at every vertical pile with 150 mm long nails or 38 swg G.I wire including cost of G.I wire or nails etc all complete job as per specification & direction of Engineer-in-Charge.				
		Mtr.	258.00	40.06	10335.63
4	Supplying of EC bag, filling of local sand, stitching and placing in position as per the direction of Engineer-in-charge.				
		Each	10660.19	37.35	398122.98
5	Supply and Carriage of brick bats upto 8 km breach and placing in breaches and lying of bats, all complete job.				


Scanned with CamScanner

Scanned with CamScanner

		Cum	55.95	1870.43	104650.71
6	Supply, laying and Carriage of of hume pipe 1000 mm dia (HPC), all complete job.				
		meter	45.00	5251.25	236306.06
	TOTAL AMOUNT =				1318995.00
	ADD 12.00 %GST=				158279.00
	SAY TOTAL AMOUNT =				1477274.00


 JE
 RWD WORKS
 DIV.
 FORBESGANJ

AE 
 RWD WORKS DIV. FORBESGANJ


 E.E.
 RWD WORKS
 DIV. FORBESGANJ

Ref. E.E. Letter No. 186/8720 Dt. 28-04-22

Technically Sanctioned For Rs. 1477274.00

(Rupees. Fourteen lacs Seventy four

thousand two hundred Seventy four Only


 11/4/22
 AE, circle


 Superintending Engineer
 Rural Works Department
 Works Circle, Kishanganj

Fulkaha Bazar to Kozhika Pur To Nepal Border



17/11/21
22

22
17/11/21
AE



[Signature]
 02/11/21
 32

[Signature]
 31/01/21
 AZ

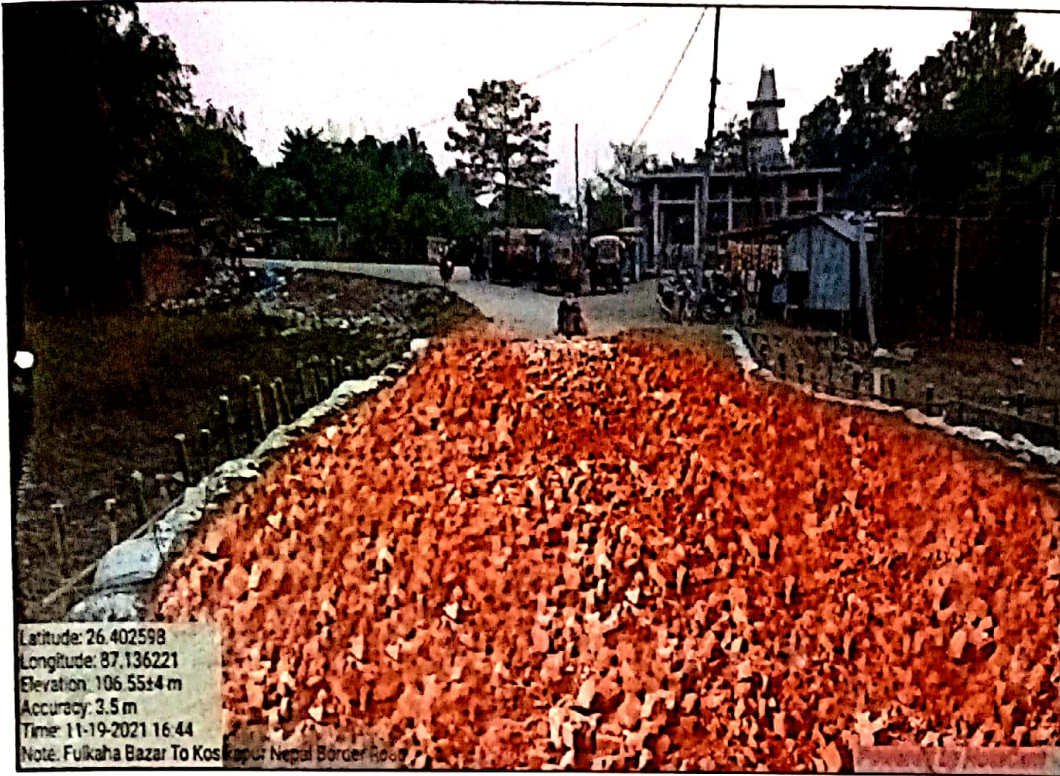
Fulkaha Bazar to Kosikapur Nepal Border



29/10/21
32

29/10/21
AE

Fulkaha Bazar To Kozhikapur Nepal Border



19/11/21
 3E

Ro
 19/11/21
 AE

Fulkaha Bazar to Koshika pur Nepal Border



18/11/21
 72

Do
 18/11/21
 AE

Fulkaha Bazar to Kosniga pur Nepal Border



18/11/21
28

De
19/11/21
ME

Fulkaha Bazar to Kosikapur Nepal Border



18/11/21
JL

Re
18/11/21
AE

Fulkaha Bazar to Koshikapur Nepal Border



04/11/21
 72

Ro
 04/11/21
 AE

Fulkaha Bazar to Koshinikapur Nepal Border



14/06/21
 AE

14/06/21
 AE