


RURAL WORKS DEPARTMENT

GOVT OF BIHAR

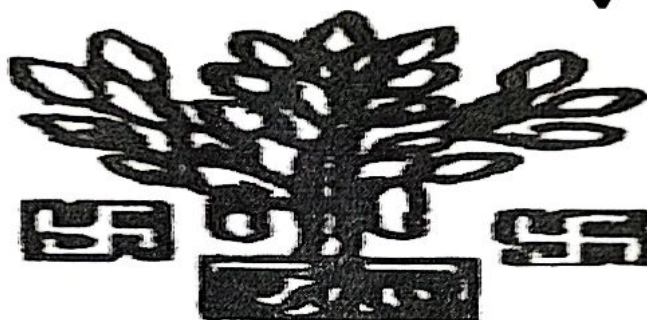

NAME OF WORKS :- Rampur Basantpur Koshkipur via Farasut path

BLOCK :- Araria

FDR

Rs. 933432.28

YEAR(2021-22)

R.W.D., WORKS CIRCLE, Kishanganj

R.W.D., WORKS DIVISION, Araria

ग्रामीण कार्य विभाग
बिहार, सरकार

पत्रांक - मु0अ0-4 (मु0) विविध कार्य-23-60/2020 - 1937

पटना, दिनांक 07/07/2021

प्रेषक,

पंकज कुमार पाल (शा0प्र0रो0)
सचिव

सेवा में,

सभी कार्यपालक अभियंता
ग्रामीण कार्य विभाग,

विषय- बाढ़ अतिवृष्टि से क्षतिग्रस्त पथों/पुलियों को यातायात लायक (Motorable) करने के संबंध में।

महाशय,

उपर्युक्त विषय के संबंध में निदेश दिया जाता है कि प्रमंडल अन्तर्गत सभी अभियंता बाढ़/अतिवृष्टि से क्षतिग्रस्त पथों का शत प्रतिशत निरीक्षण करेंगे। पथों/पुलियों के क्षतिग्रस्त भाग से पानी उतरते ही उसे यातायात लायक बनाने की कारवाई एवं Motorable किये जाने से पहले तथा Motorable कार्य के बाद का Real time, Geo tagged photographs को MIS पर तत्क्षण अपलोड किया जाना सुनिश्चित करेंगे। इन कार्यों को कराने हेतु कार्यपालक अभियंता पूर्ण रूप से जिम्मेवार होंगे। कार्य न कराने की स्थिति में उनके विरुद्ध अनुशासनिक कार्रवाई की बाध्यता होगी।

विश्वासभाजन
(पंकज कुमार पाल)
सचिव

ज्ञापांक- मु0अ0-4 (मु0) विविध कार्य-23-60/2020 - 1937

पटना, दिनांक 07/7/2021

प्रतिलिपि:-सभी अधीक्षण अभियंता को सूचनार्थ एवं आवश्यक कार्रवाई हेतु प्रेषित। साथ ही उन्हें निदेश दिया जाता है कि वे लगातार अनुश्रवण एवं निरीक्षण करते हुए क्षतिग्रस्त भाग को अतिशीघ्र यातायात लायक बनवाने की कार्रवाई सुनिश्चित करेंगे।

सचिव

ज्ञापांक-मु0अ0-4 (मु0) विविध कार्य-23-60/2020 - 1937

पटना, दिनांक 07/7/2021

प्रतिलिपि:-सभी मुख्य अभियंता, ग्रामीण कार्य विभाग को सूचनार्थ एवं लगातार अनुश्रवण करने हेतु प्रेषित।

सचिव

Inspection Report for Flood Damage Work

1. Name of PIUs

: EE RWD(W) Division, Arraria

2. Name Of Block / Road

: Arraria / Rampur Basantpur Koshikipur
Via Faragut Path

A. For Road

1. Damage Location / Chainage

: CH-3500M, 3150M, 4100M and, 4600M

2. Damage Length

: 55M

3. Nature Of Damage

: Flood

4. Details Of Restoration

: .

i) Material Being Used In Restoration

: Local Sand, bamboo, EC Bag and
Brick bats

ii) Equipment / Tools Being Used In Restoration Works

: Tractors with trolley

iii) Procedure Taken Up In Restoration Works

: Manual

iv) Restored Length

: 55M

B. For Bridge

1. Damage Location / Chainage

:

2. Damage Length

:

3. Nature Of Damage

:

4. Details Of Restoration

:

i) Material Being Used In Restoration

:

ii) Equipment / Tools Being Used in Restoration Works

:

iii) Procedure Taken Up In Restoration Works

:

iv) Restored Length

:

N.P

Found Satisfactory

Signature

Executive Engineer
(Name of Inspector)
Kishanganj-2

Signature of JE / AE / EE

SUMMARY OF COST ESTIMATE FOR THE PROJECT		
NAME OF ROAD :-	Rampur Basantpur Koshkipur via Farasut path	
DISTRICT :-	Araria	
BLOCK :-	Araria	
Length of Road:-	9.20km	
Length of Cutting:-	55.00Mtr	
Sl. No.	DESCRIPTION	AMOUNT (LAKHS)
Phase-1		
1	Filling of local sand	144642.71
2	Labour for cutting 62mm to 75mm dia bamboo	40220.40
3	Labour for fitting 62mm to 75mm dia bamboo	5463.99
4	Labour for filling empty cement bags with local sand Nylon crate	0.00
5	Supplying of EC bag, of local sand	244532.90
6	Supply and Carriage of brick bats	369098.07
7	Supply, laying and carriage of 1000 mm HPC	0.00
8	Granular Sub-base	0.00
	SUB TOTAL COST =	803958.07
	ADD GST @12% =	96474.97
	Add Labour cess @ 1% =	8039.58
	Seigniorage Fees @10% =	24959.66
	TOTAL (RS.) =	933432

[Signature]
28/12/24
J.E

[Signature]
28/12/24
A.E

[Signature]
28/12/24
E.E

Ref. E.E. Letter No. S.E

Technically Sanctioned For Rs. 933 432.00

(Rupees. Nine Lacs thirty three thousand)

four hundred thirty two

Only

Ref. E.E. Letter No. 1457 Dt. 28/4/22

Technically Sanctioned For Rs. 9,33,432=00

(Rupees. Nine Lacs thirty three

thousand four hundred thirty two) Only

28/4/22
AE


अधीक्षण अभियन्ता
ग्रामीण कार्य विभाग
कार्य अंचल, किशनगंज