


RURAL WORKS DEPARTMENT

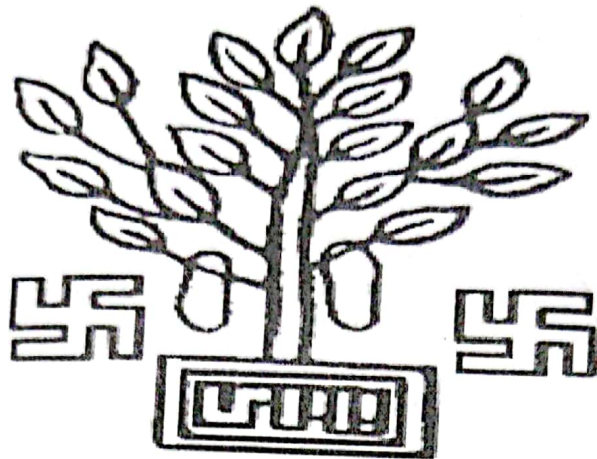

GOVERNMENT OF BIHAR

NAME OF ROAD:- RESTORATION OF ROAD FROM BATHNAHA BIRPUR
ROAD LAXMIPUR CHOWK TO PHULKAHA ROAD

DIVISION:- R.W.D, WORKS DIVISION, FORBESGANJ

CIRCLE:- R.W.D, WORK CIRCLE, KISHANGANJ

BLOCK:- NARPATGANJ

ESTIMATED COST


1852512.00


प्रतिवेदन


प्रस्तुत प्राक्कलन ग्रामीण कार्य विभाग, कार्य प्रमंडल, फारबिसगंज अंतर्गत
नरपतोज..... प्रखंड के पथ बनारस रोड पर अस्सीपुर चौक के कुलडाहा रोड
..... जो विभागीय Online Monitoring System MIS पर अपलोड
है के बाढ़ 2021 से क्षतिग्रस्त हो जाने के कारण यातायात लायक Motorable
हेतु बनाया गया है। इस कार्य को कराने का निर्देश ग्रामीण कार्य विभाग, बिहार
सरकार के पत्रांक-मु0अ0-4(मु0) विविध कार्य-23-60/2020-1937/पटना,
दिनांक-07.07.2021 से प्राप्त है। इस पत्र के Real time geo-tagged
Photograph को कार्य के दौरान अपलोड करते हुए (Motorable) कार्य कराना
सुनिश्चित करने का निर्देश प्राप्त है।

उक्त निर्देश के आलोक में सुरक्षा..... नदी/नदी उपधार एवं अतिवृष्टि से आए
बाढ़ के कारण इस पथ के Road Way के क्षतिग्रस्त हो जाने से सुरक्षित आवागमन
हेतु Motorable कार्य कराया गया है। नेपाल तराई से निकलने वाली इस नदी
के तेज धार एवं अतिवृष्टि से इस पथ में कटाव की स्थिति बनी। Motorable
कार्य में आवश्यकता अनुसार Bamboo Pilling/Pitching of E.C Bags filled
with local sand/ Local Sand Filling/ Brick bats का इस्तेमाल किया गया है।
Motorable कार्य कराकर यातायात बहाल कर दिया गया है। निर्देशानुसार कराये
गये Geo-tagged Photograph real time के साथ MIS पर अपलोड है। MIS
की छायाप्रति, अपलोडेड फोटोग्राफ की छायाप्रति दर विश्लेषण एवं विभागीय
आदेशों की छायाप्रति प्राक्कलन में संलग्न की जा रही है। प्राक्कलन में प्रयुक्त
दर अद्धतन है।

प्राक्कलन की यथा शीघ्र अनुमोदन अपेक्षित है ताकि अग्रेतर कार्रवाई
की जा सके।


कनीय अभियंता
ग्रामीण कार्य विभाग
कार्य प्रशाखा-


सहायक अभियंता
ग्रामीण कार्य विभाग
कार्य अवर प्रमंडल-


कार्यपालक अभियंता
ग्रामीण कार्य विभाग
कार्य प्रमंडल, फारबिसगंज

Inspection Report for Flood Damage Work

1. Name of PIUs

2. Name Of Block / Road

Nalbatganj/Bathnaha Bypass Road Laxmipur
choek to Fulkaha Road

A. For Road

1. Damage Location / Chainage

Ch- 0.3 Km, Ch- 0.41 Km, Ch- 0.55 Km

2. Damage Length

: 68m

Ch- 0.82 Km

3. Nature Of Damage

: Wash out / cutting

4. Details Of Restoration

: Local sand, Brickbat, Hume pipe, E.C bag

i) Material Being Used In Restoration

ii) Equipment / Tools Being Used In Restoration Works

JCB, Roller, Tractor, Bamboofiling machine

iii) Procedure Taken Up In Restoration Works

iv) Restored Length

: 68m

B. For Bridge

1. Damage Location / Chainage

2. Damage Length

3. Nature Of Damage

4. Details Of Restoration

i) Material Being Used In Restoration

ii) Equipment / Tools Being Used in Restoration Works

iii) Procedure Taken Up In Restoration Works

iv) Restored Length



C
12/8/11

Signature of JE / AE / EE

"S"



Signature

(Name Of Inspector)

Abstract of Cost

Name of Work : Estimate for Repairing/Restoration/Making Motorable Roads

Damaged during flood in JULY 2021 in ARARIA District

RESTORATION OF ROAD FROM BATHNAHA BIRPUR ROAD LAXMIPUR CHOWK TO
PHULKAHA ROAD

Name of Road:-

Block: NARPATGANJ

District: ARARIA

Division : RWD, Works Division, FORBESGANJ

Circle: RWD, Work Circle, Kishanganj

COST OF 1ST CUTTING RESTORATION

Rs 799392.00

COST OF 2ND CUTTING RESTORATION

Rs 1053120.00


TOTAL COST OF RESTORATION

Rs 1852512.00

Say Rs 1852512.00


J.E.


A.E.



E.E.

Ref. E.E. Letter No. 1561330 Dt. 28.04.22

Technically Sanctioned For Rs. 18,52,512.00

(Rupees. Eighteen lacs fifty two thousand

five hundred twelve.....) Only


11/4/22
AE, Circle


29/4/22
Superintending Engineer
Rural Works Department
Circle, Kishanganj

Abstract of Cost

Name of Work : Estimate for Repairing/Restoration/Making Motorable Roads
Damaged during flood in JULY 2020 in ARARIA District

Name of Road:

**RESTORATION OF ROAD FROM BATHNAHA BIRPUR ROAD LAXMIPUR CHOWK TO PHULKAHA ROAD
CUTTING-1**

Block: NARPATGANJ

District: ARARIA

Divison : RWD, Works Division, FORBESGANJ

Circle: RWD, Work Circle, Kishanganj

SI No.	Description	Unit	Quantity (m3)	Rate (Rs)	Amount (Rs)
1	Filling of local sand obtained from river bed, watering & ramming, all complete job as per specification & direction of Engineer-in-charge.				
		Cum	266.00	627.77	166987.23
2	Labour for cutting 62mm to 75mm dia bamboo piles to size and making shoes & driving by jet machine etc. all complete job as per specification & direction of Engineer-in-Charge.				
		Mtr.	486.00	75.86	36867.28
3	Labour for fitting & fixing 62mm to 75mm dia bamboo runners in position at every vertical pile with 150 mm long nails or 38 swg G.I wire including cost of G.I wire or nails etc all complete job as per specification & direction of Engineer-in-Charge.				
		Mtr.	162.00	40.06	6489.81
4	Supplying of EC bag, filling of local sand, stitching and placing in position as per the direction of Engineer-in-charge.				
5	Supply and Carriage of brick bats upto 8 km breach and placing in breaches and lying of bats, all complete job.	Each	6521.97	37.35	243574.34

		Cum	76.50	1851.91	141671.39
6	Supply, laying and Carriage of of hume pipe 1000 mm dia (HPC), all complete job.				
		meter	22.50	5251.25	118153.03
	TOTAL AMOUNT =				713743.00
	ADD 12.00 %GST=				85649.00
	SAY TOTAL AMOUNT =				799392.00

[Signature]
12/8/21
JE

RWD WORKS
DIV.
RBESGANJ

[Signature]
12/08/21
AE

RWD WORKS DIV. FORBESGANJ

[Signature]
12/8/21
E.E.

RWD WORKS
DIV. FORBESGANJ

Cutting of Bathnaks Birpur Road to Laxmipur
chok to Fulkahs Road



03/11/21
JL

Re
31/11/21
AE

cutting of Bathnaha Bypass to Fulkaha Laxmipur
Chok to Fulkaha Road.



12/11/21
J.E.

12/11/21
A.E.

Cutting-02 Bathnaha Bir pm Road to Landpm Chowk to Pulkaha Road.



3/11/21
 7E

De
 3/11/21
 AE

Cutting 02 Bathnaka Bdpur Road to Laxmipur
Chok to Fulkaha



19/11/21
JZ

19/11/21
AE

Cutting-02 Bathnaha 1st phase road to Laxmipur
chowk to Fulkala Road



19/11/21
J.E.

DO
19/11/21
A.E.

Outgoing-04 Balthakra Birpur Road to
Laxmipur Chok to Fulkata Road



31/10/21
32

Re
31/10/21
RE

Cutting of Ballha Birpur Road to Laxmipur
Chok to Fulkata Road



19/11/21
78

19/11/21
AE