


# RURAL WORKS DEPARTMENT

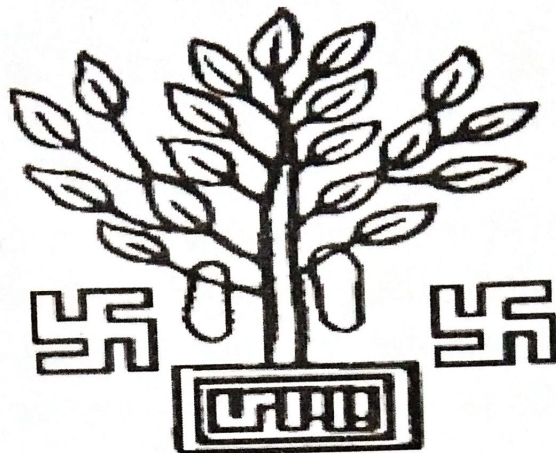

## GOVERNMENT OF BIHAR

NAME OF ROAD:- RESTORATION OF ROAD FROM BELAHI TO YADAV  
TOLA

DIVISION:- R.W.D, WORKS DIVISION, FORBESGANJ

CIRCLE:- R.W.D, WORK CIRCLE, KISHANGANJ

BLOCK:- FORBESGANJ

### ESTIMATED COST

-784074.00

~~791075.00~~

784074.00  
↓



## प्रतिवेदन


प्रस्तुत प्राक्कलन ग्रामीण कार्य विभाग, कार्य प्रमंडल, फारबिसगंज अंतर्गत


~~.....m.14.1.2021.....~~ प्रखंड के पथ ~~.....मार्ग से दे मुझसे जोर से भाग रहा~~


.....जो विभागीय Online Monitoring System MIS पर अपलोड है के बाद 2021 से क्षतिग्रस्त हो जाने के कारण यातायात लायक Motorable हेतु बनाया गया है। इस कार्य को कराने का निर्देश ग्रामीण कार्य विभाग, बिहार सरकार के पत्रांक-मु0अ0-4(मु0) विविध कार्य-23-60/2020-1937/पटना, दिनांक-07.07.2021 से प्राप्त है। इस पत्र के Real time geo-tagged Photograph को कार्य के दौरान अपलोड करते हुए (Motorable) कार्य कराना सुनिश्चित करने का निर्देश प्राप्त है।

उक्त निर्देश के आलोक में..... नदी/नदी उपधार एवं अतिवृष्टि से आए बाढ़ के कारण इस पथ के Road Way के क्षतिग्रस्त हो जाने से सुरक्षित आवागमन हेतु Motorable कार्य कराया गया है। नेपाल तराई से निकलने वाली इस नदी के तेज धार एवं अतिवृष्टि से इस पथ में कटाव की स्थिति बनी। Motorable कार्य में आवश्यकता अनुसार Bamboo Pilling/Pitching of E.C Bags filled with local sand/ Local Sand Filling/ Brick bats का इस्तेमाल किया गया है। Motorable कार्य करारकर यातायात बहाल कर दिया गया है। निर्देशानुसार कराये गये Geo-tagged Photograph real time के साथ MIS पर अपलोड है। MIS की छायाप्रति, अपलोडेड फोटोग्राफ की छायाप्रति दर विश्लेषण एवं विभागीय आदेशों की छायाप्रति प्राक्कलन में संलग्न की जा रही है। प्राक्कलन में प्रयुक्त दर अदधतन है।

प्राक्कलन की यथा शीघ्र अनुमोदन अपेक्षित है ताकि अग्रेतर कार्रवाई की जा सके।

  
कनीय अभियंता  
ग्रामीण कार्य विभाग  
कार्य प्रशाखा-

  
सहायक अभियंता  
ग्रामीण कार्य विभाग  
कार्य अवर प्रमंडल-

  
कार्यपालक अभियंता  
ग्रामीण कार्य विभाग  
कार्य प्रमंडल, फारबिसगंज



## Inspection Report for Flood Damage Work

1. Name of PIUs

: E.E. R.W.D Forbergan

2. Name Of Block / Road

: Forbergan / ~~Approach Road to mndham~~  
Belahi to Yadav Tola.

### A. For Road

1. Damage Location / Chainage

:

2. Damage Length

: 16=00 m

3. Nature Of Damage

: Side cutting

4. Details Of Restoration

:

i) Material Being Used In Restoration

: Bamboo, Sand local, Bricks bad, E. clay etc.

ii) Equipment / Tools Being Used In Restoration Works

: Tractor with Trolley, S.C.B, Roller

iii) Procedure Taken Up In Restoration Works

:

iv) Restored Length

: 16=00 m

### B. For Bridge

1. Damage Location / Chainage

:

2. Damage Length

:

3. Nature Of Damage

:

4. Details Of Restoration

:

i) Material Being Used In Restoration

:

ii) Equipment / Tools Being Used in Restoration Works


:

iii) Procedure Taken Up In Restoration Works

:

iv) Restored Length

:

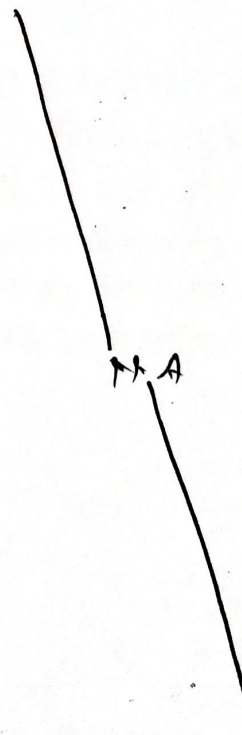

"2"

Amir 10/8/21  
Amir 10/8/21  
Q 10/8/21

Signature of JE / AE / EE

Signature

(Name Of Inspector)



## Abstract of Cost

**Name of Work :** Estimate for Repairing/Restoration/Making Motorable Roads  
Damaged during flood in JULY 2021 in ARARIA District

**Name of Road:**

### RESTORATION OF ROAD FROM BELAHI TO YADAV TOLA

**Block:** FORBESGANJ

**District:** ARARIA

**Divison :** RWD, Works Division, FORBESGANJ

**Circle:** RWD, Work Circle, Kishanganj

Sl No.	Description	Unit	Quantity (m3)	Rate (Rs)	Amount (Rs)
1	Filling of local sand obtained from river bed, watering & ramming, all complete job as per specification & direction of Engineer-in-charge.				
		Cum	224.00	627.77	140620.83
2	Labour for cutting 62mm to 75mm dia bamboo piles to size and making shoes & driving by jet machine etc. all complete job as per specification & direction of Engineer-in-Charge.				
		Mtr.	1134.00	75.86	86023.65
3	Labour for fitting & fixing 62mm to 75mm dia bamboo runners in position at every vertical pile with 150 mm long nails or 38 swg G.I wire including cost of G.I wire or nails etc all complete job as per specification & direction of Engineer-in-Charge.				
		Mtr.	378.00	40.06	15142.90
4	Supplying of EC bag, filling of local sand, stitching and placing in position as per the direction of Engineer-in-charge.				
		Each	7126.57	37.35	266153.90
5	Supply and Carriage of brick bats upto 8 km breach and placing in breaches and lying of bats, all complete job.				



		um	59.55	1870.43	111384.27
6	Supply, laying and Carriage of of hume pipe 1000 mm dia (HPC), all complete job.				
		meter	15.00	5382.71	80740.61
	TOTAL AMOUNT =				700066.00
	ADD 12.00 %GST=				84008.00
	SAY TOTAL AMOUNT =				784074.00

Add 12% GST =

Total =

700066.00

791075.00

784074.00

C. E.E.

JE  
10/8/22

RWD WORKS  
DIV.  
FORBESGANJ

AE  
10/8/22

RWD WORKS DIV. FORBESGANJ

RWD WORKS  
DIV. FORBESGANJ

Ref. E.E. Letter No. 1561(2170) Dt. 28/4/22

Technically Sanctioned For Rs. 7,84,074.00

(Rupees) Seven Lacs Eighty four thousand

28  
11/4/22  
AE, Circle.

Seventy four. ) Only

28/4/22  
Superintending Engineer  
Rural Works Department  
Works Circle, Kishanganj



### Abstract of Cost

**Name of Work :** Estimate for Repairing/Restoration/Making Motorable Roads  
Damaged during flood in JULY 2021 in ARARIA District

**Name of Road:**

**RESTORATION OF ROAD FROM BELAHI TO YADAV TOLA**

**Block:** FORBESGANJ

**District:** ARARIA

**Division :** RWD, Works Division, FORBESGANJ

**Circle:** RWD, Work Circle, Kishanganj

Sl No.	Description	Unit	Quantity (m3)	Rate (Rs)	Amount (Rs)
1	Filling of local sand obtained from river bed, watering & ramming, all complete job as per specification & direction of Engineer-in-charge.				
		Cum	224.00	627.77	140620.83
2	Labour for cutting 62mm to 75mm dia bamboo piles to size and making shoes & driving by jet machine etc. all complete job as per specification & direction of Engineer-in-Charge.				
		Mtr.	1134.00	75.86	86023.65
3	Labour for fitting & fixing 62mm to 75mm dia bamboo runners in position at every vertical pile with 150 mm long nails or 38 swg G.I wire including cost of G.I wire or nails etc all complete job as per specification & direction of Engineer-in-Charge.				
		Mtr.	378.00	40.06	15142.90
4	Supplying of EC bag, filling of local sand, stitching and placing in position as per the direction of Engineer-in-charge.				
		Each	7126.57	37.35	266153.90
5	Supply and Carriage of brick bats upto 8 km breach and placing in breaches and lying of bats, all complete job.				
		Cum	59.55	1870.43	111384.27
6	Supply, laying and Carriage of of hume pipe 1000 mm dia (HPC), all complete job.				
		meter	15.00	5382.71	80740.61
<b>Total Amount (in Rs) =</b>					<b>700066.16</b>

RWD WORKS  
DIV.  
FORBESGANJ

RWD WORKS DIV. FORBESGANJ

RWD WORKS  
DIV. FORBESGANJ



Name of Road:

## Detailed Estimate

## RESTORATION OF ROAD FROM BELAH TO YADAV TOLA

Sl No.	Items of Works	Nos.	L (m)	B (m)	D (m) EY (Avg.)	Quantity (m <sup>3</sup> )
1	Filling of local sand obtained from river bed, watering & ramming, all complete job as per specification & direction of Engineer-in-charge.					
		1	16.00	(1.5+4.5)/2	(2.5+2.5+1.5)/2	224.00
		1	0.00	(1.5+1.5)/2	(1.5+2.0)/2	0.00
		2	0.00	(1.2+1.5)/2	(1.5+1.8)/2	0.00
					TOTAL=	224.00
					Total Qty =	224.00
2	Labour for cutting 62mm to 75mm dia bamboo piles to size and making shoes & driving by jet machine etc. all complete job as per specification & direction of Engineer-in-Charge.					
		2	16.00	3.00	3.00	288.00
		2	47.00	3.00	3.00	846.00
					Total Qty =	1134.00
3	Labour for fitting & fixing 62mm to 75mm dia bamboo runners in position at every vertical pile with 150 mm long nails or 38 swg G.I wire including cost of G.I wire or nails etc all complete job as per specification & direction of Engineer-in-Charge.					
		2	16.00	3.00		96.00
		2	47.00	3.00		282.00
		0	0.00	0.00		0.00
					Total Qty =	378.00
2	Supplying of EC bag, filling of local sand, stitching and placing in position as per the direction of Engineer-in-charge.					
		2	16.00	(1.0+0.9)/2	(2+2.5+1.5)/2	60.80
		2	47.00	(1.0+0.9)/2	(2+2.5+1.5)/2	141.00
		0	0.00	0.00	0.00	0.00
		0	0.00	0.00	0.00	0.00
					TOTAL=	201.80
					Total No. of EC Bags =304.83X35.315)	7126.57
					SAY NO OF BAGE=	7127
3	Supply and Carriage of brick bats upto 8 km breach and placing in breaches and lying of bats, all complete job.					
		1	32.00	6.00	0.20	38.40
		2	47.00	1.50	0.15	21.15
					Total Qty. =	59.55
4	Supply, laying and Carriage of of hume pipe 1000 mm dia (HPC), all complete job.					
		2	3.00	2.50		15.00
					Total Qty. =	15.00

RWD WORKS DIV.  
FORBESGANJ

RWD WORKS DIV. FORBESGANJ

EE

RWD WORKS DIV.  
FORBESGANJ



बैलाहा से यादव टोला



बैलाहा से यादव टोला



C  
3/10/17

2022/4/30 13:12



बेलाहा से यादव टोला



बेलाहा से यादव टोला



C/For



# बेलाहा से यादव तीला



मि.  
बेलाहा  
१२

G/  
अमल



# बेलाहा से यादव ताला




Forbesganj  
26/10/21  
R3

C/20/21



केलावा से भादव होला

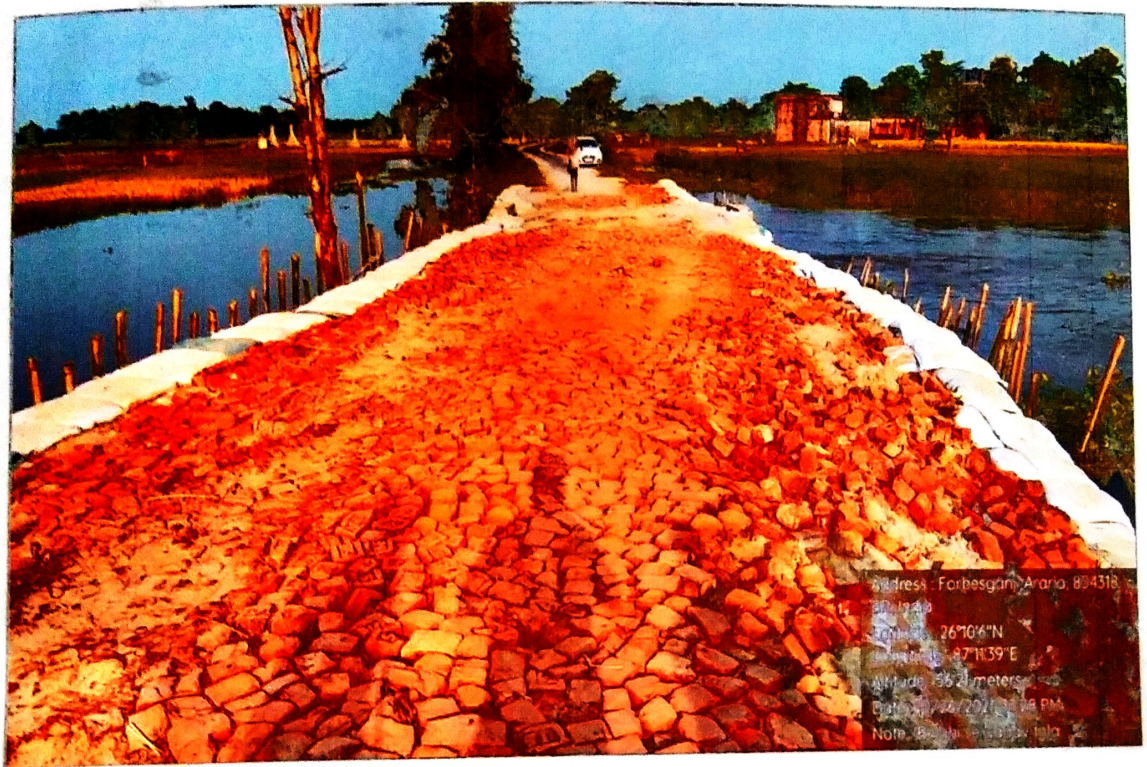

म  
30/1/21  
82

G  
30/1/21