


RURAL WORKS DEPARTMENT

GOVT OF BIHAR

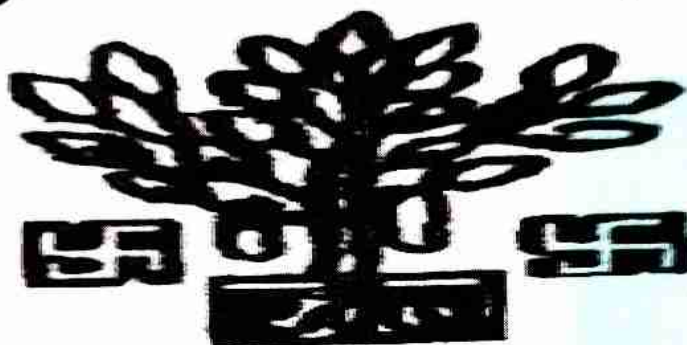

NAME OF WORKS :-

Biripul se Pairwakhori Rai tola

DISTRICT:-

Araria

BLOCK :-

Araria

FDR

Rs. 2988225.66

YEAR(2021-22)

R.W.D., WORKS CIRCLE, Kishanganj

R.W.D., WORKS DIVISION, Araria

ग्रामीण कार्य विभाग
बिहार, सरकार

पत्रांक - मु0अ0-4 (मु0) विविध कार्य-23-60/2020 - 1737

पटना, दिनांक 07/07/2021

प्रेषक,

पंकज कुमार पाल (भा0प्र0से0)
सचिव

सेवा में,

सभी कार्यपालक अभियंता
ग्रामीण कार्य विभाग,

विषय- बाढ़ अतिवृष्टि से क्षतिग्रस्त पथों/पुलियों को यातायात लायक (Motorable) करने के संबंध में।

महाशय,

उपर्युक्त विषय के संबंध में निदेश दिया जाता है कि प्रमंडल अन्तर्गत सभी अभियंता बाढ़/अतिवृष्टि से क्षतिग्रस्त पथों का शत प्रतिशत निरीक्षण करेंगे। पथों/पुलियों के क्षतिग्रस्त भाग से पानी उतरते ही उसे यातायात लायक बनाने की कारवाई एवं Motorable किये जाने से पहले तथा Motorable कार्य के बाद का Real time, Geo tagged photographs को MIS पर तत्क्षण अपलोड किया जाना सुनिश्चित करेंगे। इन कार्यों को कराने हेतु कार्यपालक अभियंता पूर्ण रूप से जिम्मेवार होंगे। कार्य न कराने की स्थिति में उनके विरुद्ध अनुशासनिक कार्रवाई की बाध्यता होगी।

विश्वासभाजन



(पंकज कुमार पाल)

सचिव

ज्ञापांक- मु0अ0-4 (मु0) विविध कार्य-23-60/2020 - 1737

पटना, दिनांक 07/7/2021

प्रतिलिपि:-सभी अधीक्षण अभियंता को सूचनार्थ एवं आवश्यक कार्रवाई हेतु प्रेषित। साथ ही उन्हें निदेश दिया जाता है कि वे लगातार अनुश्रवण एवं निरीक्षण करते हुए क्षतिग्रस्त भाग को अतिशीघ्र यातायात लायक बनवाने की कार्रवाई सुनिश्चित करेंगे।



सचिव

ज्ञापांक-मु0अ0-4 (मु0) विविध कार्य-23-60/2020 - 1737

पटना, दिनांक 07/7/2021

प्रतिलिपि:-सभी मुख्य अभियंता, ग्रामीण कार्य विभाग को सूचनार्थ एवं लगातार अनुश्रवण करने हेतु प्रेषित।



सचिव

Inspection Report for Flood Damage Work

1. Name of PIUs : EE RWD work div. Araria
2. Name Of Block / Road : Biripul Se Pairwakhorai Rai Tola
- A. For Road**
1. Damage Location / Chainage : CH-70, 120, 200, 300, 500, 1200, 1300/1400, 1500
CH-1600, 1700, 1900, 2000, 2500, 2800, 3000 m.
2. Damage Length : 599 m.
3. Nature Of Damage : Flood.
4. Details Of Restoration :
- i) Material Being Used In Restoration : Brick Bats.
- ii) Equipment / Tools Being Used In Restoration Works : JCB, Tractor.
- iii) Procedure Taken Up In Restoration Works : Manual
- iv) Restored Length : 599 m.

B. For Bridge

1. Damage Location / Chainage :
2. Damage Length :
3. Nature Of Damage :
4. Details Of Restoration : M.A.
- i) Material Being Used In Restoration :
- ii) Equipment / Tools Being Used in Restoration Works :
- iii) Procedure Taken Up In Restoration Works :
- iv) Restored Length :

Work found satisfactory.

Signature of JE / AE / EE

Signature
Executive Engineer
(Name Of (W) DIVISION
Kishanganj-2)

SUMMARY OF COST ESTIMATE PROJECT		
NAME OF ROAD :-	Biripul se Pairwaki	
DISTRICT :-	Araria	
BLOCK :-	Araria	
Length of Road:-	2.500 km	
Length of Cutting:-	599Mtr	
Sl. No.	DESCRIPTION	AMOUNT (LAKHS)
1	Filling of local sand	0.00
2	Labour for cutting 62mm to 75mm dia bamboo	0.00
3	Labour for fitting 62mm to 75mm dia bamboo	0.00
4	Labour for filling empty cement bags with local sand Nylon crate	0.00
5	Supplying of EC bag, of local sand	0.00
6	Supply and Carriage of brick bats	2535799.35
7	Supply, laying and carriage of 1000 mm HPC	0.00
8	Granular Sub-base	0.00
	SUB TOTAL COST =	2535799.35
	ADD GST @12% =	304295.92
	Add Labour cess @ 1% =	25357.99
	Seigniorage Fees @10% =	122772.39
	TOTAL (RS.) =	2988226

[Signature]
27/4/22
J.E

[Signature]
27/4/22
A.E

[Signature]
28/4/22
E.E

1457 28/4/22

Technically Sanctioned ^{S.E} for Rs. 29,88,226.00

(Rupees Twenty nine lakh eighty eight

thousand two hundred twenty six Only

[Signature]
29/4/22
A.E

[Signature]
Superintending Engineer
Rural Works Department
Work Circle Kishanganj

ESTIMATE FOR REPAIRING / RESTORATION/ MAKING MOTORABLE ROADS DAMAGED DURING FLOOD

Biripul se Pairwakhori Rai tola										
Araria										
Araria										
599.00 m										
Length of Cutting:-										
Sl. No.	DESCRIPTION OF ITEMS	Unit	Nos.	L(m)	B(m)	D(m)	QUANTITY	RATE (Rs.)	AMOUNT (Rs.)	
1	Supply and Carriage of brick bats upto 8 km breach and placing in breaches and lying of bats, all complete job.									
	At ch:-70 m	cum	2	60.00	(3+3.5)/2	(0.5+0.65+0.45)/3	208.00			
	At ch:-120 m	cum	1	27.00	(2.5+2.5)/2	(0.45+0.5+0.35)/3	29.25			
	At ch:-200 m	cum	2	5.00	(2.5+2.5)/2	(0.25+0.75+0.35)/3	11.25			
	At ch:-300 m	cum	1	8.00	(2.5+2.5)/2	(0.2+0.5+0.45)/3	7.67			
	At ch:-500 m	cum	2	9.00	(2.5+2.5)/2	(0.5+0.65+0.45)/3	24.00			
	At ch:-1200 m	cum	1	30.00	(3+3.5)/2	(0.45+0.5+0.35)/3	42.25			
	At ch:-1300 m	cum	2	58.00	(3+3.25)/2	(0.25+0.75+0.35)/3	163.13			
	At ch:-1400 m	cum	2	53.00	(2.5+3.5)/2	(0.2+0.5+0.45)/3	121.90			
	At ch:-1500 m	cum	1	5.00	(2.5+2.5)/2	(0.5+0.65+0.45)/3	6.67			

Bill of Quantity

NAME OF ROAD :-					
Biripul se Pairwakhori Rai tola					
DISTRICT :-					
Araria					
BLOCK :-					
Araria					
Sl. No.	DESCRIPTION OF ITEMS	QUANTITY	Unit	RATE (Rs.)	AMOUNT (Rs.)
1	Filling of local sand obtained from river bed, watering & ramming, all complete job as per specification & direction of Engineer-in-charge	0.00	cum	514.43	0.00
2	Supply and Carriage of brick bats upto 8 km breach and placing in breaches and lying of bats, all complete job.	1169.26	cum	2168.72	2535799.35
A) SUB TOTAL =					2535799.35
TOTAL COST =					2535799


J.E. 27/11/21


A.E. 27/11/21


E.E. 27/11/21