

FLOOD DAMAGE REPAIR (FDR)
YEAR 2021-22

FOR T/A

DISTRICT	:-	BEGUSARAI
BLOCK	:-	BHAGWANPUR Teghra
CONSTRUCTION COST	:-	Rs. 4.246 Lac
TOTAL COST	:-	Rs. 4.246 Lac

PMGSY YOJNA

NAME OF ROAD :- FLOOD DAMAGE REPAIR OF ROAD
NH-28 TO AYODHA.

TOTAL LENGTH	:	2.50 KM
LENGTH DAMAGE DUE TO FLOOD	:	0.887 KM.

SUBMITTED BY:
EXECUTIVE ENGINEER
R.W.D. WORKS DIVISION, TEGHRA

Name of Road :- Flood Damage Repair of Road
NH-28 To Ayodha.

Year 2021-22

District	:-	Begusarai
Block	:-	Teghra

GENERAL ABSTRACT OF COST

Sl No.	Item of Work	Amount (in Rs.) As Per Estimate
1	COST OF FDR	3,69,511.00
2	Add L.C. @1%	3,695.00
3	ADD GST @ 12%	44,341.00
	Add S.F. @ 10% on Material Rate	7,039.00
	Total Rs. :-	4,24,586.00
	Say Rs. :-	4,24,600.00

J.E.
22/11/2021

J.E.
RWD. Teghra

A.E.
22/11/21

A.E.
RWD. Teghra

E.E.
22/11/21


E.E.
RWD. Teghra

Sanctioned for 4,24,600 = 00 say four lakh
twenty four thousand and eight hundred only in name
of H.C. and C.P.

10.12.21
10.12.21

Sl. No.	Description	Unit	NOS	LENGTH	WIDTH	HEIGHT	QUANTITY	RATE	AMOUNT (Rs.)
1.	Providing brick bats including spreading, laying, hand packing with G hammers in layers has exceeding 75mm thick including cost of light barriers, dangle equal, chokidar, taxes, royalty etc all complete job, as per specifications and direction of E/I including cost of bricks, all complete job.								
	Qty From Calculation Sheets	Cum					66.19	1896.75	125,552.45
2.	Construction of road embankment materials obtained from borrow pits all complete job as per clause 300.1, 300.2 with lead upto 1000m								
	Qty From Calculation Sheets	Nos		0	X	0	0.00	173.25	0.00
3.	Granular Sub - base with well graded materials (table 400.1) Gr II								
4.1 (B)	(A) By Mix in Place Method Construction of granular sub base by providing well graded materials, Spreading in uniform layers with motor grader on prepared surface, mixing by mix in place method with rotovator at OMC, and compacting with smooth wheel roller to achieve the desired density, complete as per Technical Specification clause 401 For Grading II Materials								
							120.578	2,023.26	2,43,959.40
							Total =		369511.00


 J.E.
 RWD, Teghra



 A.E.
 RWD, Teghra


 E.E.
 RWD Teghra

✓ Road- Flood Damage Repair of Road NH-28 To Ajodhya
 Length- 0.887 KM



12
 18/01/2022 a
 Teghra

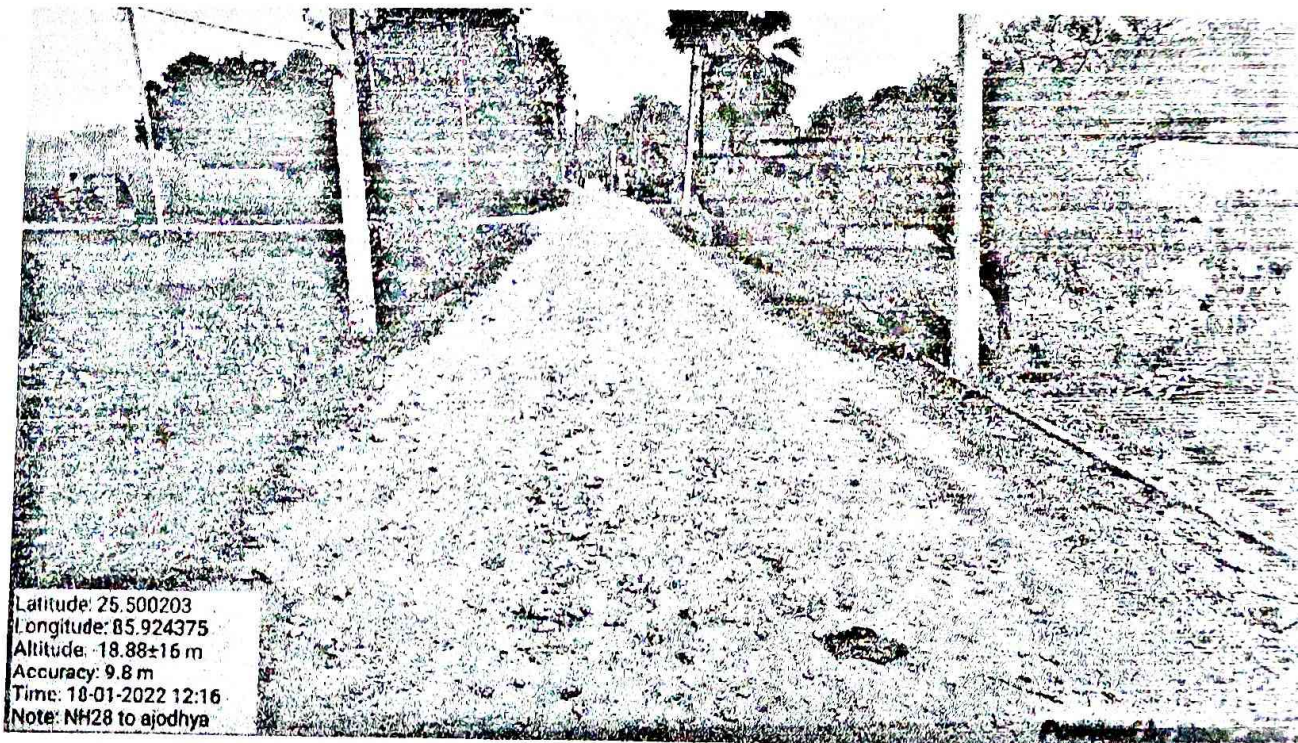

12
 18/01/2022 a
 Teghra


18/11/22

Logan

18/11/55
Camp. 6

18/11/55
Logan

Note: NH-58 to 810000
Time: 01-18-5033 11:41
Ascent: 124 m
Elevation: 81 12533 m
Grounding: 82 85444
Gaining: 32 48240

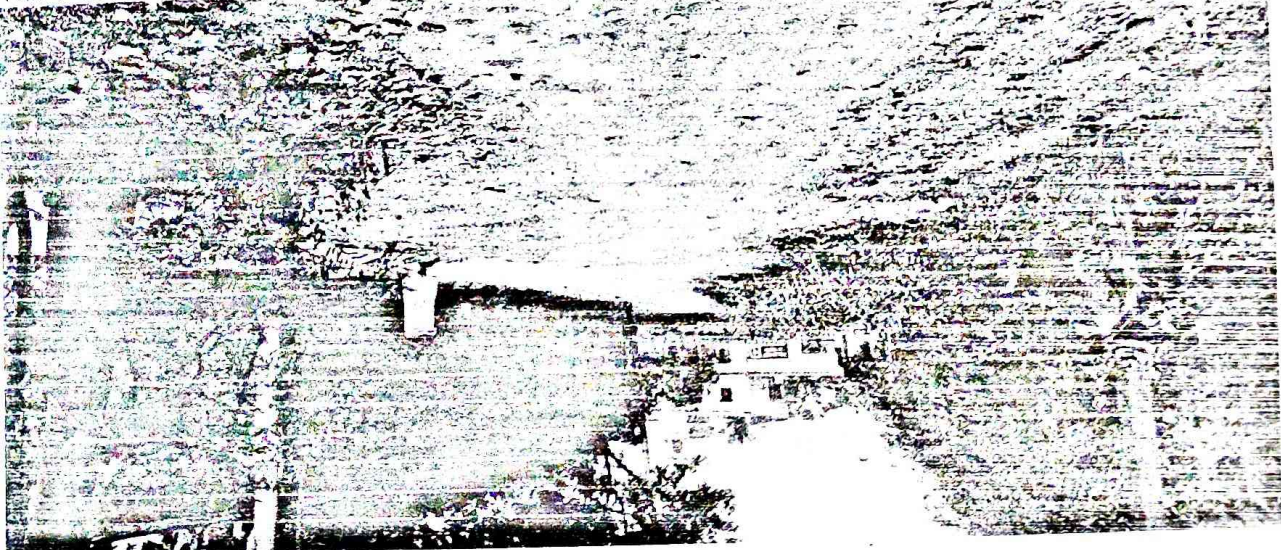

Logan

18/11/55
Logan

Note: NH-58 to 810000
Time: 01-18-5033 11:43
Ascent: 83 m
Elevation: 83 08313 m
Grounding: 82 853214
Gaining: 32 488422



Logan - 0.887 km

Logan - 11000 Domo before of 6000 NH-58 to 12400

अधीक्षण अभियंता का कार्यालय
ग्रामीण कार्य विभाग, कार्य अंचल, समस्तीपुर।

दिनांक- 10.12.2021

पत्रांक- 2063

प्रेषक,

अधीक्षण अभियंता

ग्रामीण कार्य विभाग,

कार्य अंचल, समस्तीपुर।

सेवा में,

मुख्य अभियंता-4

ग्रामीण कार्य विभाग,

बिहार, पटना।

विषय: शीर्ष-FDR अन्तर्गत पथों की प्राक्कलन तकनीकि अनुमोदनोपरान्त समर्पित करने के संबंध में।
प्रसंग:-ग्रामीण कार्य विभाग कार्य प्रमण्डल, तेघड़ा (बेगूसराय) का पत्रांक ~~1000-2021~~ दिनांक ~~10/12/21~~ 8/12/21
1

महाशय,

उपर्युक्त विषयक प्रसांगिक पत्र के संबंध में कहना है कि ग्रामीण कार्य विभाग, कार्य प्रमण्डल, तेघड़ा (बेगूसराय) के अधीन शीर्ष-FDR अन्तर्गत वर्ष- 2021-22 के प्राप्त प्राक्कलन कर को तकनीकि अनुमोदनोपरान्त प्रसाशनिक स्वीकृति हेतु समर्पित किया जा रहा है।

अनु0-25 पथों की प्राक्कलन एक-एक प्रति में।

विश्वासभाजन

10/12/21

10.12.2021

अधीक्षण अभियंता

ग्रामीण कार्य विभाग, कार्य अंचल, समस्तीपुर।

पथों की सूची-

क्र.सं.	पथ का नाम	अतिश्रुत भाग (मी० में)	Total
1	NH JHAMATIA GHAT - GOPALPUR	188.000	805941.00
2	NH-28 Rani to Bhajos Dih	711.000	494803.00
3	X Road - Chan Barkhut C. Ghat	174.000	477678.00
4	Kadrabad (PWD Road) To (Dharampur) Bachhwara	95.000	251624.00
5	Railway Gumti Bachhwara to Siswa Road	120.000	331731.00
6	Chamtha REO Goptol to Chiraiyatok(Rescined work)	27.000	80230.00
7	Chan Bharkhoot L06 Chhot khut to Laxman tola Bharat chowk	16.000	79742.00
8	Constriction of bridge of size 4x24.75 m. on Dadopur ghat of Baya river of Bachhwara block in Begusarai Dist.	39.000	82218.00
9	PWD RD - MOKARIR	79.000	154536.00
10	L039 - T01 Chabilapur to Barkurwa (VR39)	78.000	787750.00
11	Tara Chowk to Rampur	5.000	107204.00
12	PWD ROAD - DAHRATHPUR	132.000	133586.00
13	Patni Chowk Rwd Road to Makratol	168.000	908972.00
14	L023-NH-28 To Temahuan(VR23)Chiwanr	6.000	107712.00
15	S048 Mahadalit Tola to Larwapur Bandh Via House of Munna Mahto (Talan)	507.000	368746.00
16	Bachhwara to Samsa Road	341.000	506337.00
17	PMGSY Road Dasrathpur house of ganga giri to MMGSY Road Satbhaiya tola	82.000	101257.00
18	L023 - NH-28 To Temahuan (VR23)	61.000	182476.00
19	PWD Road to Rajapur Ragho	21.000	50862.00
20	L03-Teghra Atarua P Road To Mananpur	219.000	278793.00
21	L032-T02 to Maheshpur	19.000	138219.00
22	T02 Churamanchak To Gaura Sima	135.000	205916.00
23	PWD To Din Dhayal Path	180	361409.00
24	NH-28 To Ayodha	887	424586.00
25	L038-Issapur To Samastipur Siwan	357	1402672.00
			8825000.00

(Signature)
10.12.21

Superintend Engineer
RWD (w) Circle Samastipur

कार्यपालक अभियंता का कार्यालय

ग्रामीण कार्य विभाग, कार्य प्रमण्डल, समस्तीपुर

पत्रांक- Comp. Teghda, 01

दिनांक- 7.12.21

प्रेषक,

कार्यपालक अभियंता

ग्रामीण कार्य विभाग,

कार्य प्रमण्डल, समस्तीपुर ।

सेवा में,

कार्यपालक अभियंता

ग्रामीण कार्य विभाग,

कार्य प्रमण्डल, तेघड़ा (बेगूसराय)।

विषय: शीर्ष-FDR अन्तर्गत पथों की जांच प्रतिवेदन समर्पित करने के संबंध में

प्रसंग : कार्यपालक अभियंता, ग्रामीण कार्य विभाग, तेघड़ा (बेगूसराय) के पत्रांक- 1 दिनांक- 24.11.2021

महाराज,

उपर्युक्त विषयक प्रसांगिक पत्र के संबंध में कहना है कि ग्रामीण कार्य विभाग, कार्य प्रमण्डल, तेघड़ा (बेगूसराय) के अधीन शीर्ष-FDR अन्तर्गत वर्ष- 2021-22 के पथों की जांच कर जांच प्रतिवेदन आवश्यक कारवाई हेतु समर्पित किया जाता है ।

अनु0- पथों की सूची ।

विश्वासभाजन

कार्यपालक अभियंता

ग्रामीण कार्य विभाग, कार्य प्रमण्डल, समस्तीपुर ।

राजीव गांधी विभाग, कार्य प्रमाणिक, तैयारि द्वारा कराये गये पथों की जाँच से संबंधित प्रमाणिक

क्र.सं.	पथ का नाम	अंतिम राशि भाग (मी० मे)	कराये गये कार्य	कुल गये कार्य की राशि (रु०)	GST @ 12%	L. Cess @ 1%	S.E. @ 10%	Total	अवधि
1	NH JHAMATIA GHAT - GOPALPUR	188.000	Bricks bats, sand bags, Bamboo piling	700937.00	84112.00	7009.00	13883.00	805941.00	कार्य पूर्ण ।
2	NH-28 Rani to Bhajos Dih	711.000	Bricks bats	416574.00	49989.00	4166.00	24074.00	494803.00	कार्य पूर्ण ।
3	X Road - Chan Barkhut C. Ghat	174.000	Bricks Bats, Sand bags	414436.00	49732.00	4144.00	9366.00	477678.00	कार्य पूर्ण ।
4	Kadhabad (PWD Road) To (Dharampur) Bachhwara	95.000	Bricks bats, sand bags, GSB Gr-II	218310.00	26197.00	2183.00	4934.00	251624.00	कार्य पूर्ण ।
5	Railway Gumti Bachhwara to Siswa Road	120.000	Bricks Bbat	279283.00	33514.00	2793.00	16141.00	331731.00	कार्य पूर्ण ।
6	Chamtha REO Goptol to Chiraiyatok (Rescined work)	27.000	Bricks Bats, Sand bags	69608.00	8353.00	696.00	1573.00	80230.00	कार्य पूर्ण ।
7	Chan Bharkhoot L06 Chhot khut to Laxman tola Bharat chowk	16.000	Bricks bats	69184.00	8302.00	692.00	1564.00	79742.00	कार्य पूर्ण ।
8	Constriction of bridge of size 4x24.75 m. on Dadapur ghat of Baya river of Bachhawara block In Begusarai Dist.	39.000	Bricks Bats, Sand bags	71333.00	8560.00	713.00	1612.00	82218.00	कार्य पूर्ण ।
9	PWD RD - MOKARIR	79.000	Bricks bats	134076.00	16089.00	1341.00	3030.00	154536.00	कार्य पूर्ण ।
10	L039 - T01 Chabilapur to Barkurwa (VR39)	78.000	Bricks bats	663207.00	79585.00	6632.00	38326.00	787750.00	कार्य पूर्ण ।
11	Tara Chowk to Rampur	5.000	Sand bags, Bricks bats, HP -600mm dia	93011.00	11161.00	930.00	2102.00	107204.00	कार्य पूर्ण ।
12	PWD ROAD - DAHRATHPUR	132.000	Sand bags	115900.00	13908.00	1159.00	2619.00	133586.00	कार्य पूर्ण ।
13	Patni Chowk Rwd Road to Makratol	168.000	E/W, Sand bags, Bricks bats, HP NP-3 1000mm dia	788628.00	94635.00	7886.00	17823.00	908972.00	कार्य पूर्ण ।
14	L023-NH-28 To Temahuan (VR23) Chlwanr	6.000	Bricks bats	90680.00	10882.00	907.00	5243.00	107712.00	कार्य पूर्ण ।
15	S048 Mahadalit Tola to Larwapur Bandh via House of Munna Mahto (Telan)	507.000	Sand bags	319926.00	38391.00	3199.00	7230.00	368746.00	कार्य पूर्ण ।
16	Bachhwara to Samsa Road	341.000	Bricks bats	426284.00	51154.00	4263.00	24636.00	506337.00	कार्य पूर्ण ।
17	PMGSY Road Dasrathpur house of ganga giri to MMGSY Road Satbhaya tola	82.000	Sand bags	87851.00	10542.00	879.00	1985.00	101257.00	कार्य पूर्ण ।
18	L023 - NH-28 To Temahuan (VR23)	61.000	Sand bags	158317.00	18998.00	1583.00	3578.00	182476.00	कार्य पूर्ण ।
19	PWD Road to Rajapur Ragho	21.000	Bricks bats	44129	5295.00	441.00	997.00	50862.00	कार्य पूर्ण ।

Bids

✓ 20	L03-Teghra Atarua P Road To Mananpur	219.000	Bricks bats	235058	28207.00	2351.00	13177.00	278793.00	कार्य पूर्ण ।
✓ 21	L032-T02 to Maheshpur	19.000	Bricks bats	116536	13984.00	1165.00	6534.00	138219.00	कार्य पूर्ण ।
✓ 22	T02 Churamanchak To Gaura Sima	135.000	Bricks bats	173613	20834.00	1736.00	9733.00	205916.00	कार्य पूर्ण ।
✓ 23	PWD To Din Dhayal Path	180	GSB, WBM Gr-iii	303852	36462.00	3039.00	18056.00	361409.00	कार्य पूर्ण ।
✓ 24	NH-28 To Ayodha	887	Bricks bats ,GSB	369511	44341.00	3695.00	7039.00	424586.00	कार्य पूर्ण ।
✓ 25	L038-Issapur To Samastipur Siwan	357	Bricks bats Sand bags	1216963	146036.00	12170.00	27503.00	1402672.00	कार्य पूर्ण ।

उपरोक्त सभी पथों की जाँच की गई जो संतोषप्रद है ।

8825000.00

Excutive Engineer

RWD (W) Division Samastipur