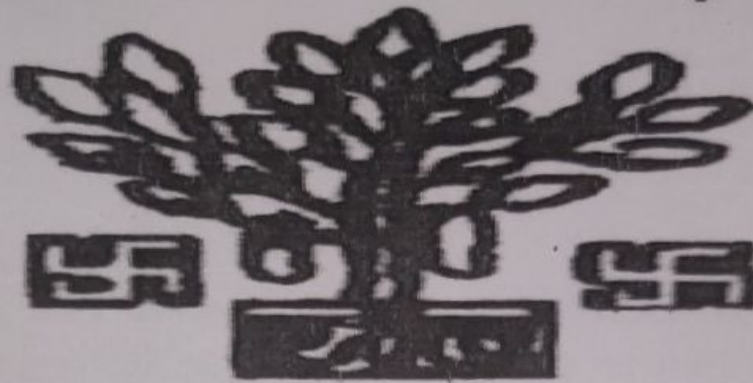


RURAL WORKS DEPARTMENT

GOVT OF BIHAR



NAME OF WORKS :-

Barkurwa Primary School to pakri Mandal tola

BLOCK :-

Kursakanta

FDR

Rs. 2790081.87

YEAR(2021-22)

R.W.D., WORKS CIRCLE, Kishanganj

R.W.D., WORKS DIVISION, Araria

ग्रामीण कार्य विभाग
बिहार, सरकार

पत्रांक - मु0अ0-4 (मु0) विविध कार्य-23-60/2020 -1937

पटना, दिनांक 07/07/2021

प्रेषक,

पंकज कुमार पाल (गा0प्र0शे0)
सचिव

सेवा में,


सभी कार्यपालक अभियंता
ग्रामीण कार्य विभाग,

विषय- बाढ़ अतिवृष्टि से क्षतिग्रस्त पथों/पुलियों को यातायात लायक (Motorable) करने के संबंध में।

महाशय,

उपर्युक्त विषय के संबंध में निदेश दिया जाता है कि प्रमंडल अन्तर्गत सभी अभियंता बाढ़/अतिवृष्टि से क्षतिग्रस्त पथों का शत प्रतिशत निरीक्षण करेंगे। पथों/पुलियों के क्षतिग्रस्त भाग से पानी उतरते ही उसे यातायात लायक बनाने की कारवाई एवं Motorable किये जाने से पहले तथा Motorable कार्य के बाद का Real time, Geo tagged photographs को MIS पर तत्क्षण अपलोड किया जाना सुनिश्चित करेंगे। इन कार्यों को कराने हेतु कार्यपालक अभियंता पूर्ण रूप से जिम्मेवार होंगे। कार्य न कराने की स्थिति में उनके विरुद्ध अनुशासनिक कार्रवाई की बाध्यता होगी।

विश्वासभाजन




(पंकज कुमार पाल)

सचिव

ज्ञापांक- मु0अ0-4 (मु0) विविध कार्य-23-60/2020 -1937

पटना, दिनांक 07/7/2021

प्रतिलिपि:-सभी अधीक्षण अभियंता को सूचनार्थ एवं आवश्यक कार्रवाई हेतु प्रेषित। साथ ही उन्हें निदेश दिया जाता है कि वे लगातार अनुश्रवण एवं निरीक्षण करते हुए क्षतिग्रस्त भाग को अतिशीघ्र यातायात लायक बनवाने की कारवाई सुनिश्चित करेंगे।




सचिव

ज्ञापांक-मु0अ0-4 (मु0) विविध कार्य-23-60/2020 -1937

पटना, दिनांक 07/7/2021

प्रतिलिपि:-सभी मुख्य अभियंता, ग्रामीण कार्य विभाग को सूचनार्थ एवं लगातार अनुश्रवण करने हेतु प्रेषित।



सचिव

32

Inspection Report for Flood Damage Work

1. Name of PIUs

: E.E RWD (W) division, Araria

2. Name Of Block / Road

: Kunsakanta/Baskurua primary school to
galesi mandal Tola

A. For Road

1. Damage Location / Chainage

: CH- 300, 350, 450, 1200, 1800, 1900, 2400, 2450
2600, 2650, 2700

2. Damage Length

: 191.5 m

3. Nature Of Damage

: crust & flank washed out.

4. Details Of Restoration

: soil, local sand, brick bat, bamboo.

i) Material Being Used In Restoration

:

ii) Equipment / Tools Being Used In Restoration Works

: Tractor with trolley & others.

iii) Procedure Taken Up In Restoration Works

: filling all damaged portion of crust
& flank with above material.

iv) Restored Length

: 191.5 m

B. For Bridge

1. Damage Location / Chainage

:

2. Damage Length

:

3. Nature Of Damage

:

4. Details Of Restoration

:

i) Material Being Used In Restoration

:

ii) Equipment / Tools Being Used in Restoration Works

:

iii) Procedure Taken Up In Restoration Works

:

iv) Restored Length

:

Work found Satisfactory.

F31/12/04

Signature of JE / AE / EE

Signature

Executive Engineer

RWD (W) Inspector
(Name of Inspector)
Kishanganj-2

SUMMARY OF COST ESTIMATE FOR THE PROJECT		
NAME OF ROAD :-	Barkurwa Primary School to pakri Mandal tola	
DISTRICT :-	Araria	
BLOCK :-	Kursakanta	
Length of Road:-	3.543km	
Length of Cutting:-	191.00Mtr	
Sl. No.	DESCRIPTION	AMOUNT (LAKHS)
Phase-1 & Phase-2		
1	Filling of local sand	1104359.03
2	Labour for cutting 62mm to 75mm dia bamboo	24431.40
3	Labour for fitting 62mm to 75mm dia bamboo	13613.67
4	Labour for filling empty cement bags with local sand Nylon crate	0.00
5	Supplying of EC bag, of local sand	572731.80
6	Supply and Carriage of brick bats	690981.30
7	Supply, laying and carriage of 1000 mm HPC	0.00
8	Granular Sub-base	0.00
	SUB TOTAL COST =	2406117.20
	ADD GST @12% =	288734.06
	Add Labour cess @ 1% =	24061.17
	Seigniorage Fees @10% =	71169.43
	TOTAL (RS.) =	2790082

[Signature]
28/12/07

J.E

[Signature]
A.E

[Signature]
29/12/22
E.E

Ref. E.E. Letter No. 1457 Dt. 28/04/022

S.E

Technically Sanctioned For Rs. 27,90,082 =

(Rupees. Twenty seven lacs only)

[Signature]
29/4/22
A.E

Thousand eight two

[Signature]
29/4/22



ESTIMATE FOR REPAIRING / RESTORATION/ MAKING MOTORABLE ROADS DAMAGED DURING FLOOD

Phaes-1

NAME OF ROAD :-		Barkurwa Primary School to pakri Mandal tola					
DISTRICT :-		Araria					
BLOCK :-		Kursakanta					
Length of Cutting:-		191.00 Km					
Sl. No.	DESCRIPTION OF ITEMS	Unit	Nos.	L(m)	B(m)	D(m)	AMOUNT (Rs.)
1	Filling of local sand obtained from river bed, watering & ramming, all complete job as per specification & direction of Engineer-in-charge						
	At ch:-300 m	cum	1	16.00	3.25	1.92	99.67
	At ch:-350 m	cum	1	22.00	2.75	2.23	135.12
	At ch:-350 m	cum	1	27.00	2.75	2.32	172.01
	At ch:-450 m	cum	4	4.00	2.75	2.40	105.60
	At ch:-1200 m	cum	1	8.00	2.75	2.77	60.87
	At ch:-1200 m	cum	3	3.00	2.75	1.92	47.44
	At ch:-1800 m	cum	1	28.00	3.25	2.23	203.23
	At ch:-1900 m	cum	1	20.00	2.75	2.32	127.42
	At ch:-2400 m	cum	1	8.00	2.75	2.40	52.80
	At ch:-2450 m	cum	1	18.00	2.75	1.92	94.88
	At ch:-2600 m	cum	1	13.00	2.75	2.23	79.84
	At ch:-2650 m	cum	1	3.00	2.75	2.32	19.11
	At ch:-2700 m	cum	1	21.00	2.75	2.40	138.60
	total qty :-						1336.58
2	Labour for cutting 62 mm to 75mm dia bamboo piles to size and making shoes & driving by jet machine etc. all complete job as per specification & direction of Engineer-in-charge.						514.43
							687576.42

Sl. No.	DESCRIPTION OF ITEMS	Unit	Nos.	L(m)	B(m)	D(m)	QUANTITY	RATE (Rs.)	AMOUNT (Rs.)
3	At ch:-350 m		1	27.00	4.50		121.50		
	At ch:-1200 m		1	8.00	4.50		36.00		
	At ch:-2600 m		1	14.00	4.50		63.00		
		Mtr.	total qty:-				220.50	55.40	12,215.70

Sl. No.	DESCRIPTION OF ITEMS	Unit	Nos.	L(m)	B(m)	D(m)	QUANTITY	RATE (Rs.)	AMOUNT (Rs.)
	At ch:-1900 m	cum	1	11.00	0.75	2.40	19.80		
	At ch:-2400 m	cum	1	8.00	0.75	2.77	16.60		
	At ch:-2450 m	cum	1	18.00	0.75	1.95	26.33		
	At ch:-2600 m	cum	1	13.00	0.75	1.88	18.36		
	At ch:-2700 m	cum	1	21.00	0.75	1.83	28.88		
	Total No of E C Bags(3.4cum=100Bags) =			318.84	/	0.034	9378.00		
		Each		Say No of Bage :-				38.03	356645.340
5	Supply and Carriage of brick bats upto 8 km breach and placing in breaches and lying of bats, all complete job.								
	At ch:-300 m	cum	1	16.00	2.25	0.42	15.00		
	At ch:-350 m	cum	1	22.00	2.25	0.42	20.63		
	At ch:-350 m	cum	1	27.00	2.25	0.42	25.31		
	At ch:-450 m	cum	4	4.00	2.25	0.42	15.00		
	At ch:-1200 m	cum	1	8.00	2.25	0.42	7.50		
	At ch:-1200 m	cum	3	3.00	2.25	0.42	8.44		
	At ch:-1800 m	cum	1	28.00	2.25	0.42	26.25		
	At ch:-1900 m	cum	1	20.00	2.25	0.42	18.75		
	At ch:-2400 m	cum	1	8.00	2.25	0.42	7.50		
	At ch:-2450 m	cum	1	18.00	2.25	0.42	16.88		
	At ch:-2600 m	cum	1	13.00	2.25	0.42	12.19		

Sl. No.	DESCRIPTION OF ITEMS	Unit	Nos.	L(m)	B(m)	D(m)	QUANTITY	RATE (Rs.)	AMOUNT (Rs.)
	At ch:-2650 m	cum	1	3.00	2.25	0.42	2.81		
	At ch:-2700 m	cum	1	21.00	2.25	0.42	19.69		
		cum	total qty :-				195.94	2,168.72	424933.58
							A) SUB TOTAL =		1488177.87
							TOTAL COST =		1488177.87
	 28/12/24  Asstt. Engineer  Executive Engineer								
	Junior Engineer								



S.E
Kishanganj

ESTIMATE FOR REPAIRING / RESTORATION/ MAKING MOTORABLE ROADS DAMAGED DURING FLOOD

Phaes-2

NAME OF ROAD :-		Barkurwa Primary School to pakri Mandal tola							
DISTRICT :-		Araria							
BLOCK :-		Kursakanta							
Length of Cutting:-		128.00 Mtr							
Sl. No.	DESCRIPTION OF ITEMS	Unit	Nos.	L(m)	B(m)	D(m)	QUANTITY	RATE (Rs.)	AMOUNT (Rs.)
1	Filling of local sand obtained from river bed, watering & ramming, all complete job as per specification & direction of Engineer-in-charge								
	At ch:-300 m	cum	1	16.00	3.25	1.58	82.33		
	At ch:-350 m	cum	1	22.00	2.75	1.90	114.95		
	At ch:-350 m	cum	1	27.00	2.75	1.98	147.26		
	At ch:-450 m	cum	4	4.00	2.75	2.07	90.93		
	At ch:-1200 m	cum	1	8.00	2.75	2.43	53.53		
	At ch:-1200 m	cum	3	3.00	2.75	1.58	39.19		
	At ch:-1800 m	cum	1	28.00	3.25	1.90	172.90		
	At ch:-1900 m	cum	1	20.00	2.75	1.98	109.08		
		cum					810.18	514.43	416782.61
					total qty :-				
2	Labour for cutting 62 mm to 75mm dia bamboo piles to size and making shoes & driving by jet machine etc. all complete job as per specification & direction of Engineer- in -charge.								
	At ch:-350 m		1	27.00	4.50		121.50		
	At ch:-1200 m		1	8.00	4.50		36.00		
	At ch:-2600 m		1	14.00	4.50		63.00		
		Mtr.					220.50	55.40	12,215.70
3	Labour for fitting & fixing 62 mm to 75 mm dia bamboo runners in position at every vertical pile with 150 mm long nails or 38 swg G.I wire including cost of G.I wire or nails etc all complete job as per specification & direction of Engineer-in-charge.								
	At ch:-350 m		1	27.00	4.50		121.50		


	At ch:-1200 m		1	8.00	4.50		36.00		
	At ch:-2600 m		1	14.00	4.50		63.00		
	Mtr.				total qty :-		220.50	30.87	6806.84
4	Supplying of EC bag, filling of local sand stitching and placing in position as the direction of Engineer-in-charge.								
	At ch:-300 m	cum	1	16.00	0.75	1.90	22.80		
	At ch:-350 m	cum	1	22.00	0.75	1.90	31.35		
	At ch:-350 m	cum	1	27.00	0.75	1.90	38.48		
	At ch:-450 m	cum	4	4.00	0.75	1.90	22.80		
	At ch:-1200 m	cum	1	8.00	0.75	1.90	11.40		
	At ch:-1800 m	cum	1	28.00	0.75	1.90	39.90		
	At ch:-1900 m	cum	1	11.00	0.75	1.90	15.68		
	At ch:-1900 m	cum	1	20.00	0.60	0.90	10.80		
	Total No of E C Bags(3.4cum=100Bags) =			193.20	/	0.034	5682.00		
		Each		Say No of Bage :-			5682.00	38.03	216086.460
5	Supply and Carriage of brick bats upto 8 km breach and placing in breaches and lying of bats, all complete job.								
	At ch:-300 m	cum	1	16.00	2.75	0.35	15.40		
	At ch:-350 m	cum	1	22.00	2.25	0.35	17.33		
	At ch:-350 m	cum	1	27.00	2.25	0.35	21.26		
	At ch:-450 m	cum	4	4.00	2.25	0.35	12.60		
	At ch:-1200 m	cum	1	8.00	2.25	0.35	6.30		

At ch:-1200 m	cum	3	3.00	2.25	0.35	7.09	
At ch:-1800 m	cum	1	28.00	2.75	0.35	26.95	
At ch:-1900 m	cum	1	20.00	2.25	0.35	15.75	
	cum	total qty :-				122.68	2,168.72
						A) SUB TOTAL =	917939.33
						TOTAL COST =	917939.33
 08/12/2024 Junior Engineer  Asstt. Engineer  Executive Engineer							

S.E
Kishanganj

Calculation of Seigniorage Fees

Calculation of Seigniorage Fees					
NAME OF ROAD :-		Barkurwa Primary School to pakri Mandal tola			
DISTRICT :-		Araria			
BLOCK :-		Kursakanta			
Sl. No.	DESCRIPTION OF ITEMS	QUANTITY	UNIT	RATE (Rs.)	AMOUNT (Rs.)
1	Filling of local sand obtained from river bed, watering & ramming, all complete job as per specification & direction of Engineer-in-charge	2146.76	CUM	141.85	304518.26
4	Labour for fitting empty cement bags with loocal sand, stitching the bags and placing in Nylon crate of size (1 m X 1 m X 1 m)with lead of 150 M including supply of sutli etc. at site in dry portion all complete as per approved design, specification and direction of E/I	0.00	CUM	141.85	0.00
5	Supplying of EC bag, filling of local sand stitching and placing in position as the direction of Engineer-in-charge.	512.04	CUM	141.85	72632.87
6	Supply and Carriage of brick bats upto 8 km breach and placing in breaches and lying of bats, all complete job.	318.61	CUM	1050.00	334543.13
8	Granular Sub-base with Well Graded Material (Table 400.1)	0.00	CUM	384.12	0.00
		A) SUB TOTAL =			711694.26
	Seigniorage Fees @10% of Basic Amount =				71169


28/12/07

J.E




A.E

E.E

Bill of Quantity				
Phase-1 & Phase-2				
NAME OF ROAD :-		Barkurwa Primary School to pakri Mandal tola		
DISTRICT :-		Araria		
BLOCK :-		Kursakanta		
Sl. No.	DESCRIPTION OF ITEMS	QUANTITY	RATE (Rs.)	AMOUNT (Rs.)
1	Filling of local sand obtained from river bed, watering & ramming, all complete job as per specification & direction of Engineer-in-charge	2146.76	514.43	1104359.03
2	Labour for cutting 62 mm to 75mm dia bamboo piles to size and making shoes & driving by jet machine etc. all complete job as per specification & direction of Engineer- in -charge.	441.00	55.40	24431.40
3	Labour for fitting & fixing 62 mm to 75 mm dia bamboo runners in position at every vertical pile with 150 mm long nails or 38 swg G.I wire including cost of G.I wire or nails etc all complete job as per specification & direction of Engineer-in-charge.	441.00	30.87	13613.67
4	Labour for fitting empty cement bags with local sand, stitching the bags and placing in Nylon crate of size (1 m X 1 m X 1 m)with lead of 150 M including supply of sutli etc. at site in dry portion all complete as per approved design, specification and direction of E/I	0.00	1249.46	0.00
5	Supplying of EC bag, filling of local sand stitching and placing in position as the direction of Engineer-in-charge.	15060.00	38.03	572731.80
6	Supply and Carriage of brick bats upto 8 km breach and placing in breaches and lying of bats, all complete job.	318.61	2168.72	690981.30


7	Supplaying and carriage of hume pipe 1000 mm dia , all complete job.	0.00	4425.07	0.00
8	Granular Sub-base with Well Graded Material (Table 400.1)	0.00	2,564.86	0.00
		A) SUB TOTAL =		2406117.20
		TOTAL COST =		2406117

 28/12/24

J.E



A.E



E.E

RATE ANALYSIS FOR CARRIAGE OF BASE MATERIAL														
			Name of Road		Barkurwa Primary School to pakri Mandal tola									
DISTRICT :-			Araria		Block		:-		Kursakanta					
Sr. No.	Description of Items	Source	Unit	Caopacity	Haulage	Lead	Total	Capacity	Haulage	Lead	Total	Loading + Unloading	Rail Carriage	Carriage Cost
1	Hume Pipe 1000 mm Dia	Purnia	M	8/22.5	6.83	115	628.36	8/22.5	16.54	0.00	0.00	70.46		698.82
2	Hume Pipe 600 mm Dia	Purnia	M	8/52.50	6.83	115	119.69	8/52.50	16.54	0.00	0.00	30.20		149.89
3	Bamboo	Local	% Nos	3.60/1.35	17.03	5	227.07	3.60/1.35	26.60	5.00	354.67	2224.00		2805.73
4	E.C Bag	Local	cum	3.60/2.25	17.03	2	54.50	3.60/2.25	26.60	1	42.56	97.82		194.88
5	Stone Metal gr-II	Mirzachowki	cum	8/4.99	6.83	120	1313.99	8/4.99	16.54	0.00	0.00	180.88		1494.87
6	Stone Metal gr-II	Mirzachowki	cum	8/4.99	6.83	120	1313.99	8/4.99	16.54	0	0.00	180.88		1494.87
7	Brick Bats	Local	800 Nos	3.60/2.25	17.03	7	190.74	3.60/2.25	26.60	1	42.56	180.88		414.18
8	Local Sand	Local	cum	3.60/2.25	17.03	2	54.50	3.60/2.25	26.60	1	42.56	97.82		194.88

Geetika

J.E
RWD (W) DIVISION
Araria

Assistant Engineer
RWD (W) DIVISION
Araria

Executive Engineer
RWD (W) DIVISION
Araria