

बिहार सरकार

FLOOD DAMAGE REPAIR (FDR)

YEAR 2021-22

FOR T/A

DISTRICT :- BEGUSARAI
BLOCK :- BHAGWANPUR

CONSTRUCTION COST	:-	Rs. 2.788 Lac
TOTAL COST	:-	Rs. 2.788 Lac

PMGSY YOJNA

NAME OF ROAD :- FLOOD DAMAGE REPAIR OF ROAD
L035 - TEGHRA ATARUA P ROAD TO
MANANPUR (VR35)

TOTAL LENGTH	:	2.261 KM
LENGTH DAMAGE DUE TO FLOOD	:	0.219 KM.

SUBMITTED BY:
EXECUTIVE ENGINEER
R.W.D. WORKS DIVISION, TEGHRA

Name of Road :- L035 - Teghra Atarua P Road To Mananpur (VR35)

Year 2021-22

District	:-	Begusarai
Block	:-	Bhagwanpur

GENERAL ABSTRACT OF COST

Sl No.	Item of Work	Amount (in Rs.) As Per Estimate
1	COST OF FDR	2,35,058.00
2	Add L.C. @1%	2,351.00
3	ADD GST @ 12%	28,207.00
	Add S.F. @ 10% on Material Rate	13,177.00
	Total Rs. :-	2,78,793.00
	Say Rs. :-	2,78,800.00

Arvind Sharma
22/11/2021
J.E.

RWD. Teghra

Arvind
22/11/21
A.E.

RWD. Teghra

Arvind
22/11/21
E.E.

RWD. Teghra

Process many. Tech in camp. Some to road for Rs 2,78,800.00 say two lakh seventy eight thousand Eight hundred only including O.H.C and C.P.

Arvind
10.12.21
बसन्त कुमार
आर्य समाज विभाग
आर्य संघ, प्रयाग
10.12.2021.

SDE SL.NO	MORD Ref.No	Description	Unit	NOS	LENGTH	WIDTH	HEIGHT	QUANTITY	RATE	AMOUNT (in Rs.)
1		Providing brick bats including ,spreading,laying, hand packing with CI hammers in layers has exceeding 75mm thick including cost of light barriers,danger equal,choukidar,taxes,royalty etc all complete job, as per specifications and direction of E/I including cost of bricks,.....all complete job.						123.93	1896.75	2,35,058.00
		Qty From Calculation Sheets	Cum							
2		Construction of road embankment materials obtained from borrow pitsall complete job as per clouse 300.1,300.2 with lead upto 1000m						0.00	173.25	0.00
		Qty From Calculation Sheets	Nos	0	X	0				
								Total =		235058.00

Arvind Sharma
22/11/2024
J.E
RWD. Teghra

Chand
22/11/24
A.E.
RWD. Teghra

mm
23/11/24
E.E.
RWD. Teghra

			100%	5.00	3.600	0.300	=	5.400	
			100%	4.20	1.600	0.300	=	2.016	
			100%	1.90	0.900	0.300	=	0.513	
			100%	3.10	1.700	0.300	=	1.581	
			100%	14.40	1.400	0.300	=	6.048	
			100%	3.00	1.000	0.300	=	0.900	
			100%	3.90	1.500	0.300	=	1.755	
			100%	4.40	1.200	0.300	=	1.584	
			100%	5.00	3.100	0.300	=	4.650	
			100%	3.10	0.600	0.300	=	0.558	
			100%	3.70	1.100	0.300	=	1.221	
			100%	3.10	1.000	0.300	=	0.930	
				219.80			=	123.927	Cum
			TOTAL QUANTITY						

Asimul Sharma
J.E 22/11/2021

A.E.

E.E.

Lat Name - FDR of Road 1035 - Teghri atarua
Road to Mananpur


Length - 0.219 K.M




Arvind Sharma
17/1/2022
J.E

Arvind
17/1/22

road Name - FDR of Road to 35 - Toghre atarua
Road to Manampur
length - 0.219 K.M

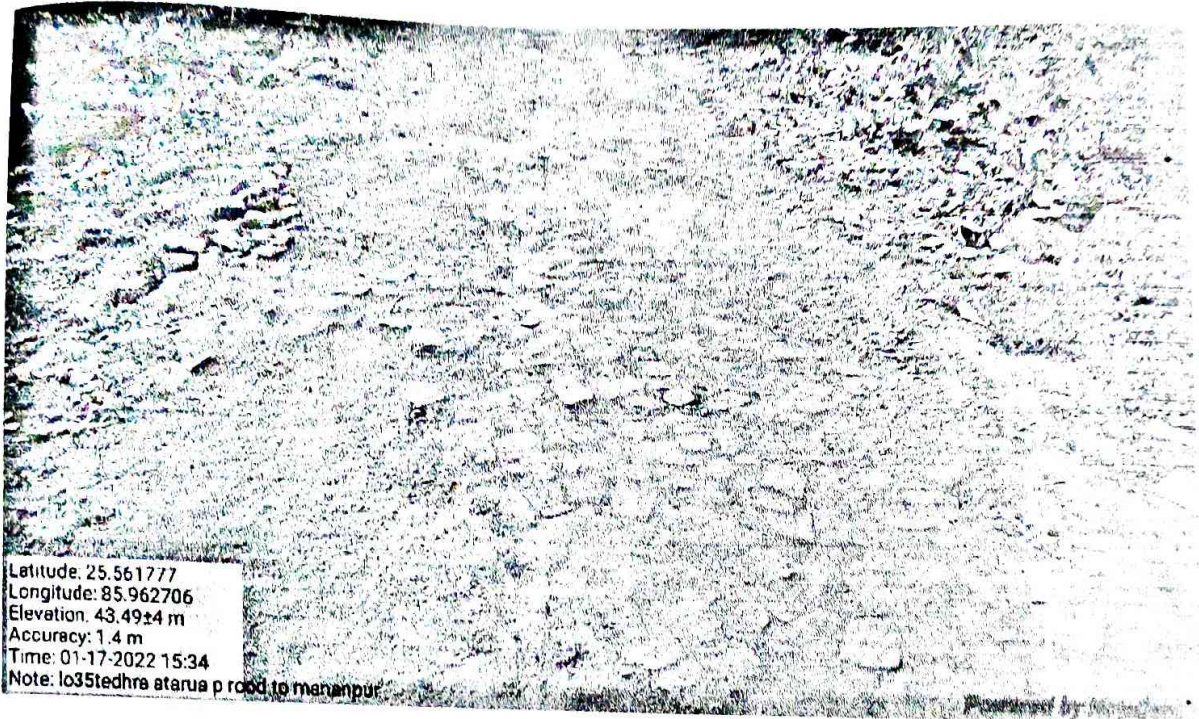

Latitude: 25.561777
Longitude: 85.962706
Elevation: 43.49±4 m
Accuracy: 1.4 m
Time: 01-17-2022 15:34
Note: lo35tedhra atarua p road to manampur

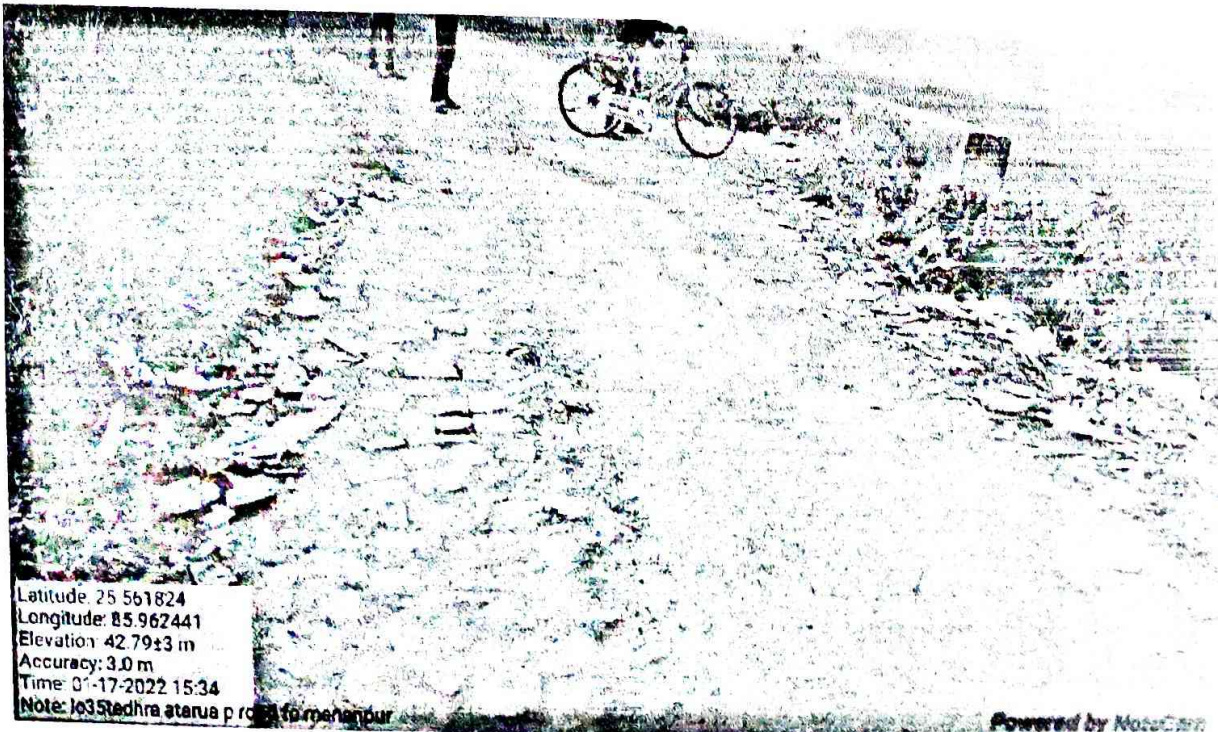

Latitude: 25.561824
Longitude: 85.962441
Elevation: 42.79±3 m
Accuracy: 3.0 m
Time: 01-17-2022 15:34
Note: lo35tedhra atarua p road to manampur

Powered by NoteCam

Arvind Sharma
17/1/2022
J.E

Arvind
17/1/22

2 Name - FDR of Road L035. Teghra atarua
Road to Mananpur

Length - 0.219 K.M



Latitude: 25.553845
Longitude: 85.957507
Elevation: 51.09±4 m
Accuracy: 3.0 m
Time: 01-17-2022 15:41
Note: lo35tedhra atarua p road to mananpur

Powered by Google



Latitude: 25.561313
Longitude: 85.961927
Elevation: 43.09±4 m
Accuracy: 1.3 m
Time: 01-17-2022 15:36
Note: lo35tedhra atarua p road to mananpur

Powered by Google

Artinal charne
17/1/2022
S.E

syndicate
17/1/22

कार्यपालक अभियंता का कार्यालय

ग्रामीण कार्य विभाग , कार्य प्रमण्डल, समस्तीपुर

पत्रांक-

Comp, Teghna, 01

दिनांक- 7.12.21

प्रेषक,

कार्यपालक अभियंता
ग्रामीण कार्य विभाग ,
कार्य प्रमण्डल, समस्तीपुर ।

सेवा में,

कार्यपालक अभियंता
ग्रामीण कार्य विभाग ,
कार्य प्रमण्डल, तेघड़ा (बेगूसराय) ।

विषय: शीर्ष-FDR अन्तर्गत पथों की जाँच प्रतिवेदन समर्पित करने के संबंध में ।

of Camp Dar Sahasni

प्रसंग : कार्यपालक अभियंता, ग्रामीण कार्य विभाग, तेघड़ा (बेगूसराय) के पत्रांक-

दिनांक- 24.11.2021

महाशय,

उपर्युक्त विषयक प्रसांगिक पत्र के संबंध में कहना है कि ग्रामीण कार्य विभाग, कार्य प्रमण्डल, तेघड़ा (बेगूसराय) के अधीन शीर्ष-FDR अन्तर्गत वर्ष- 2021-22 के पथों की जाँच कर जाँच प्रतिवेदन आवश्यक कारवाई हेतु समर्पित किया जाता है ।

अनु0- पथों की सूची ।

विश्वासभाजन

7.12.21

कार्यपालक अभियंता

ग्रामीण कार्य विभाग, कार्य प्रमण्डल, समस्तीपुर ।

ग्रामीण कार्य विभाग, कार्य प्रमण्डल, तेघड़ा द्वारा कराये गये पथों की जाँच से संबंधित प्रतिवेदन

क्र० सं०	पथ का नाम	कतिग्रस्त भाग (मी० में)	कराय गये कार्य	कराय गये कार्य की राशि (रु०)	GST @ 12%	L. Cess @ 1%	S.F. @ 10%	Total	अभियुक्ति
1	NH JHAMATIA GHAT - GOPALPUR	188.000	Bricks bats,sand bags,Bamboo piling	700937.00	84112.00	7009.00	13883.00	805941.00	कार्य पूर्ण ।
2	NH-28 Rani to Bhajos Dih	711.000	Bricks bats	416574.00	49989.00	4166.00	24074.00	494803.00	कार्य पूर्ण ।
3	X Road - Chan Barkhut C. Ghat	174.000	Brics Bats,Sand bags	414436.00	49732.00	4144.00	9366.00	477678.00	कार्य पूर्ण ।
4	Kadradbad (PWD Road) To (Dharampur) Bachhwara	95.000	Bricks bats,sand bags,GSB Gr-II	218310.00	26197.00	2183.00	4934.00	251624.00	कार्य पूर्ण ।
5	Railway Gumti Bachhwara to Siswa Road	120.000	Brics Bbat	279283.00	33514.00	2793.00	16141.00	331731.00	कार्य पूर्ण ।
6	Chamtha REO Goptol to Chiraiyatok(Rescined work)	27.000	Bricks Bats, Sand bags	69608.00	8353.00	696.00	1573.00	80230.00	कार्य पूर्ण ।
7	Chan Bharkhoot L06 Chhot khut to Laxman tola Bharat chowk	16.000	Brics bats	69184.00	8302.00	692.00	1564.00	79742.00	कार्य पूर्ण ।
8	Constriction of bridge of size 4x24.75 m. on Dadopur ghat of Baya river of Bachhawara block in Begusarai Dist.	39.000	Brics Bats,Sand bags	71333.00	8560.00	713.00	1612.00	82218.00	कार्य पूर्ण ।
9	PWD RD - MOKARIR	79.000	Brics bats	134076.00	16089.00	1341.00	3030.00	154536.00	कार्य पूर्ण ।
10	L039 - T01 Chabilapur to Barkurwa (VR39)	78.000	Brics bats	663207.00	79585.00	6632.00	38326.00	787750.00	कार्य पूर्ण ।
11	Tara Chowk to Rampur	5.000	Sand bags,Bricks bats,HP -600mm dia	93011.00	11161.00	930.00	2102.00	107204.00	कार्य पूर्ण ।
12	PWD ROAD - DAHRATHPUR	132.000	Sand bags	115900.00	13908.00	1159.00	2619.00	133586.00	कार्य पूर्ण ।
13	Patni Chowk Rwd Road to Makratol	168.000	E/W,Sand bags,Brics bats,HP NP-3 1000mm dia	788628.00	94635.00	7886.00	17823.00	908972.00	कार्य पूर्ण ।
14	L023-NH-28 To Temahuan(VR23)Chiwanr	6.000	Bricks bats	90680.00	10882.00	907.00	5243.00	107712.00	कार्य पूर्ण ।
15	S048 Mahadalit Tola to Larwapur Bandh Via House of Munna Mahto (Telan)	507.000	Sand bags	319926.00	38391.00	3199.00	7230.00	368746.00	कार्य पूर्ण ।
16	Bachhwara to Samsa Road	341.000	Brics bats	426284.00	51154.00	4263.00	24636.00	506337.00	कार्य पूर्ण ।
17	PMGSY Road Dasrathpur house of ganga giri to MMGSY Road Satbhaiya tola	82.000	Sand bags	87851.00	10542.00	879.00	1985.00	101257.00	कार्य पूर्ण ।
18	L023 - NH-28 To Temahuan (VR23)	61.000	Sand bags	158317.00	18998.00	1583.00	3578.00	182476.00	कार्य पूर्ण ।
19	PWD Road to Rajapur Ragho	21.000	Brics bats	44129	5295.00	441.00	997.00	50862.00	कार्य पूर्ण ।

20	L03-Teghra Atarua P Road To Mananpur	219.000	Bricks bats	235058	28207.00	2351.00	13177.00	278793.00	कार्य पूर्ण ।
21	L032-T02 to Maheshpur	19.000	Bricks bats	116536	13984.00	1165.00	6534.00	138219.00	कार्य पूर्ण ।
22	T02 Churamanchak To Gaura Sima	135.000	Bricks bats	173613	20834.00	1736.00	9733.00	205916.00	कार्य पूर्ण ।
23	PWD To Din Dhayal Path	180	GSB, WBM Gr-iii	303852	36462.00	3039.00	18056.00	361409.00	कार्य पूर्ण ।
24	NH-28 To Ayodha	887	Bricks bats ,GSB	369511	44341.00	3695.00	7039.00	424586.00	कार्य पूर्ण ।
25	L038-Issapur To Samastipur Siwan	357	Bricks bats Sand bags	1216963	146036.00	12170.00	27503.00	1402672.00	कार्य पूर्ण ।

उपरोक्त सभी पथों की जाँच की गई जो संतोषप्रद है ।

8825000.00


Excutive Engineer

RWD (W) Division Samastipur