



ग्रामीण कार्य विभाग

Rural Works Department, Govt. of Bihar

DETAILED PROJECT REPORT FOR MOTRABLE REPAIRING OF ROAD

F.D.R. PART - MOTRABLE RESTORATION

KATHAR SARIFGANJ TO MANSAHI (MARANGI)

DETAILED ESTIMATE OF F.D.R. MOTRABLE REPAIRING ROAD

ROAD LENGTH	0 TO 6500		
DISTRICT	KATIHAR		
BLOCK	MANSAHI		
DIVISION	MANIHARI		
TOTAL LENGTH OF ROAD	6.500		KM
TOTAL COST OF F.D.R. PART - A	Rs. 3.457		Lacs
ADD G.S.T @ 12%	Rs. 0.415		Lacs
ADD Labour Cess @ 1%	Rs. 0.035		Lacs
ADD Seigniorage Fee @ 10%	Rs. 0.188		Lacs
TOTAL COST OF RESTORATION WORK In Rs.	Rs. 4.095		Lacs

SUBMITTED BY
The Executive Engineer,
Works Division, Manihari

प्रतिवेदन

प्रस्तुत प्राक्कलन ग्रामीण कार्य विभाग कार्य प्रमण्डल मनसाही अन्तर्गत मनसाही प्रखंड पथ कटिहार शरीगंज से मनसाही गेहूं (.....) जो भागीय Online Morititring System MIS पर अपलोड है के बाद 2021 से क्षतिग्रस्त हो जाने के कारण यातायात लायक Moterale हेतु बनाया गया है। इस कार्य को करने का निर्देश ग्रामीण कार्य विभाग, बिहार सरकार के पत्रांक:-मु0अ0-4(मु0) विविध (कार्य) -23-291/2019-4275/पटना, दिनांक-2/10/2021 से प्राप्त है। इस पत्र से Real time Geotagged Photographs को कार्य के दौरान अपलोड करते हुए (Moterale) कार्य कराना सुनिश्चित करने का निर्देश प्राप्त है।

उक्त निर्देश के आलोक में 30.11.21 अतिवृष्टि/बाढ़ उपधार से आए बाढ़ के कारण इस पथ के रोडवे के क्षतिग्रस्त हो जाने से सुरक्षित आवागमन हेतु Moterale कार्य कराया गया है। MIS में उपलोडेड फोटो दिनांक 30.11.21 का Lat/Long के साथ लिया गया है। नेपाल तराई से निकलनेवाली इस नदी के तेज धार से इस पथ में कटाव की स्थिति बनी। मोटरबल कार्य में आवश्यकतानुसार मिट्टी भराई, लोकल बालु भराई, खाली सिमेंट बैग में लोकल बालु भरकर, बॉस का पाइल, चचरी, बॉस का रनर, ह्यूम पाइप एवं ब्रिक बैट का इस्तेमाल किया गया है। निर्देशानुसार कराए गए कार्य कि Geotagged Photographs Real Time के साथ MIS पर उद्धत है। MIS की छायाप्रति, अपलोडेड फोटोग्राफ की छायाप्रति, दर विश्लेषण एवं विभागीय आदेशों की छायाप्रति प्राक्कलन में संलग्न की जा रही है। प्राक्कलन में प्रयुक्त दर अद्यतन है।

प्राक्कलन की यथाशीघ्र अनुमोदन अपेक्षित है ताकि अग्रेतर कार्रवाई की जा सके।

मनसाही
कनीय अभियंता
ग्रामीण कार्य विभाग
कार्य प्रशाखा, मनसाही.....

मनसाही
सहायक अभियंता
ग्रामीण कार्य विभाग
कार्य अवर प्रमंडल, मनसाही.....

मनसाही
कार्यपालक अभियंता
ग्रामीण कार्य विभाग
कार्य प्रमंडल, मनसाही.....

Date:

Inspection Report for Flood damage work

1. Name of PIUs- E.E R.W.D, works Division, Muzikani.

2. Name of Block/Road- Mousaki

A. For Road Kitharo samfango To Mousaki (Marang'i)

1. Damage Location/Chainage : Difference chainage in bps 0-65000 m.

2. Damage Length : 324 m.

3. Nature of Damage :

4. Details of Restoration : pot holes and washout near RCC culvert.

i Material being used in Restoration Brick Bats

ii Equipment/Tools being used in Restoration works: Tractor, JCB etc.

iii Procedure taken up in Restoration works : Laying Brick Bats and rolling

iv Restored Length : 324 m.

B. For Bridge

1. Damage Location/Chainage :

2. Damage Length :

3. Nature of Damage :

4. Details of Restoration :

i Material being used in Restoration :

ii Equipment/Tools being used in Restoration works:

iii Procedure taken up in Restoration works :

iv Restored Length :

Signature of JE/AE/EE

Signature

(Name of Inspector)

GENERAL ABSTRACT OF COST FOR MAINTENANCE OF ROAD

NAME OF ROAD KATHAR SARIFGANJ TO MANSAHI (MARANGI)
DISTRICT KATIHAR
DIVISION MANIHARI
BLOCK MANSAHI
LENGTH OF ROAD (IN KM) 6.500

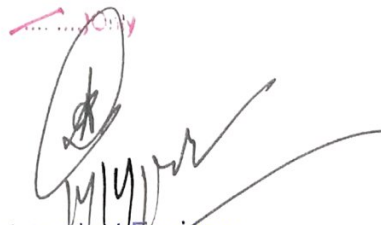
Sl. No.	ITEM OF WORK	AMOUNT (LAKHS)
1	EARTH WORK	0.000
2	HUME PIPE	0.000
3	BRIKCK BAT	3.457
4	SAND BAGS	0.000
5	BAMBOO WORK	0.000
6	STEEL DRUM SHEET	0.000
TOTAL COST OF PROJECT =		3.457
Add G.S.T. @ 12%		0.415
Add Labour Cess @ 1%		0.035
Add Seigniorage Fee @ 10%		0.188
Total Cost of Restoration Work =		4.095


J.E.
RWD


A.E.
RWD


E.E.
RWD

Technically Sanction for Rs. 4.095 Lac (Rs. x
Crore. Four Lac. Nine
Thousand. Five Hundred.


Superintendent Engineer
Rural Works Department
Works Circle, Purnea